

3M Building and Construction  
Market Center



Nothing  
but the  
Best.

**3M**

# Building Confidence

from the ground up



Whether you're working on new construction, renovation or demolition and clean-up, 3M has a wide range of reliable solutions to help you be more productive and efficient through each stage of the project.

3M Building and Construction Market consolidated hundreds of products for many 3M divisions into a single convenient resource to better serve the construction market.

In addition to products, you can rely on 3M for service that includes a toll-free assistance hotline staffed with technical support specialists:

**1-866-513-4026**

This catalog contains information on solutions for many construction applications. The following are just a few examples:

- Waterproofing foundations
- Concrete tilt-up
- Seaming, sealing, or repairing moisture barriers
- Stucco masking
- Sealing mineral wool insulation
- Sealing sheet metal ducts
- Sealing wall penetrations with water tight fire barrier
- Work site containment
- Custom threading and anchoring in concrete
- Removing rust and corrosion

# Table of Contents

## Abrasives

<b>Belts</b> .....	4-5
<b>Discs</b> .....	5-8
<b>Disc Accessories</b> .....	8-9
<b>Vibrator Sander rolls</b> .....	10
<b>Wheels</b> .....	10-12
<b>Sanding</b> .....	12-14

## Adhesives

<b>Featured Spray Adhesives</b> .....	15
<b>Cylinders</b> .....	16-17
<b>Cylinder Accessories</b> .....	17-18
<b>Aerosols</b> .....	18-19
<b>Bulk</b> .....	19-21
<b>Adhesive Remover</b> .....	21
<b>Hot Melt Adhesives</b> .....	21
<b>Hot Melt Adhesive Accessories</b> .....	22
<b>Cleaners &amp; Lubricants</b> .....	22

## Sealants

<b>Sealants</b> .....	23-24
<b>Concrete Repair</b> .....	25
<b>Paint Repair</b> .....	25
<b>Wood Filler</b> .....	25

## Tapes

<b>Duct Tapes</b> .....	26-27
<b>Masking Tapes</b> .....	28-29
<b>Painter's Tape and Drop cloths</b> .....	30-32
<b>Seaming Tapes</b> .....	32
<b>House Wrap</b> .....	33
<b>Vinyl Tapes</b> .....	33
<b>Flexible Duct Closure</b> .....	33
<b>Aluminum Foil</b> .....	33-35
<b>Repair</b> .....	35
<b>Facing Tapes</b> .....	35
<b>Insulation Jacketing</b> .....	36

## Tapes (cont.)

<b>Cooler Repair</b> .....	36-37
<b>Foam Tape</b> .....	37
<b>Hazard Warning</b> .....	38
<b>Box Sealing Tapes</b> .....	38-39
<b>Filament Tapes</b> .....	39

## Fire Barrier

<b>Featured Products</b> .....	40
<b>Sealants</b> .....	41-42
<b>Packing Material</b> .....	42
<b>Anchors</b> .....	42
<b>Plastic Pipe Device</b> .....	42
<b>Cast-In Devices</b> .....	43
<b>Pass-Through</b> .....	43-44
<b>Restricting Collar</b> .....	44
<b>Fire Barrier Pillows</b> .....	44
<b>Mortar</b> .....	45
<b>Putty+Pads and Sticks</b> .....	45
<b>Wrap Strips</b> .....	45-46
<b>Fire Dam Spray</b> .....	46
<b>Composite Sheet</b> .....	46

## Safety

<b>Respirators, Cartridges and Filters</b> .....	47-51
<b>Protective Eyewear</b> .....	52-53
<b>Head Protection</b> .....	54-55
<b>Ear Protection</b> .....	55-58
<b>Protective Coveralls</b> .....	58
<b>Roofing Kit</b> .....	58
<b>First Aid Kit</b> .....	58
<b>Reflective Safety Vests</b> .....	58-59
<b>Work Gloves</b> .....	59
<b>Aerial Lift Kits</b> .....	59

## Electrical

<b>Electrical Tapes</b> .....	60-61
<b>Cable Ties</b> .....	61-62
<b>Barricade Tapes</b> .....	63

# Abrasives

## Scotch-Brite™ General Purpose Hand Pad 7447

Most universally used in a variety of applications. Excellent starting point to clean, finish, grain, denib and defuzz. May be used by hand, with a hand pad block, or on an in-line sander. Abrasive mineral: Very fine grade aluminum oxide.

- Load resistant
- Performs like steel wool grade 1 without splintering
- Worldwide standard for surface conditioning
- Clean, blend, finish and deburr faster, easier and with better results than conventional abrasives



UPC	Size	Grade	Color	Case Qty	Units
0-00-48011-04029-5	6 in x 9 in	AVFIN	Maroon	60	PD

## Belts, Cloth

### 3M™ Cloth Belt 241E

An aluminum oxide cloth belt constructed on a XE weight, firm rayon cloth backing. Resin bonded for heat resistance.



UPC	Size	Grade	Color	Case Qty	Units
0-00-51144-72227-3	½ in x 18 in	60	Maroon	200	BT
0-00-51144-72228-0	½ in x 18 in	80	Maroon	200	BT
0-00-51144-72229-7	½ in x 18 in	120	Maroon	200	BT
0-00-51144-26725-5	½ in x 24 in	50	Maroon	200	BT
0-00-51144-26723-1	½ in x 24 in	60	Maroon	200	BT
0-00-51144-26720-0	½ in x 24 in	80	Maroon	200	BT
0-00-51144-26719-4	½ in x 24 in	100	Maroon	200	BT
0-00-51144-26717-0	½ in x 24 in	120	Maroon	200	BT
0-00-51144-26715-6	½ in x 24 in	180	Maroon	200	BT
0-00-51144-14756-4	¾ in x 18 in	60	Maroon	200	BT
0-00-51144-14519-5	¾ in x 18 in	80	Maroon	200	BT
0-00-51144-14667-3	¾ in x 18 in	120	Maroon	200	BT

### 3M™ Cloth Belt 340D

An aluminum oxide, load-resistant, open coat cloth belt constructed on a X weight, durable cloth backing. Resin bonded for heat resistance. Good general purpose belt for woodworking, particularly on soft woods.



UPC	Size	Grade	Color	Case Qty	Units
0-00-51144-27496-3	3 in x 21 in	P100	Maroon	50	BT
0-00-51144-27495-6	3 in x 21 in	P120	Maroon	50	BT
0-00-51144-27471-0	3 in x 24 in	P100	Maroon	50	BT
0-00-51144-27470-3	3 in x 24 in	P120	Maroon	50	BT
0-00-51144-27461-1	4 in x 24 in	P100	Maroon	50	BT
0-00-51144-27460-4	4 in x 24 in	P120	Maroon	50	BT

### 3M™ Cloth Belt 341D

An aluminum oxide cloth belt constructed on a X weight, durable cloth backing. Resin bonded for heat resistance. Good general purpose belt for woodworking, particularly on harder woods.



UPC	Size	Grade	Color	Case Qty	Units
0-00-051115-66603-2	3 in x 21 in	P120	Maroon	50	BT
0-00-051115-66606-3	3 in x 24 in	80	Maroon	50	BT
0-00-051115-66608-7	3 in x 24 in	P120	Maroon	50	BT
0-00-051115-66613-1	4 in x 24 in	P120	Maroon	50	BT

## Belts, Surface Conditioning

### Scotch-Brite™ Surface Conditioning Belt

A non-woven belt used for cleaning, finishing, blending and deburring applications. The reinforced backing offers good flexibility.



UPC	Size	Grade	Color	Case Qty	Units
0-00-48011-08856-3	½ in x 18 in	AVFN	Blue	20	BT
0-00-48011-08857-0	½ in x 18 in	AMED	Maroon	20	BT
0-00-48011-08858-7	½ in x 18 in	ACRS	Brown	20	BT
0-00-48011-04299-2	½ in x 24 in	AVFN	Blue	20	BT
0-00-48011-03998-5	½ in x 24 in	AMED	Maroon	20	BT
0-00-48011-05741-5	½ in x 24 in	ACRS	Brown	20	BT
0-00-48011-14543-3	¾ in x 18 in	AVFN	Blue	20	BT
0-00-48011-15899-0	¾ in x 18 in	AMED	Maroon	20	BT
0-00-48011-13639-4	¾ in x 18 in	ACRS	Brown	20	BT

## Disc, Surface Conditioning

### Scotch-Brite™ Roloc™ Surface Conditioning Disc

A non-woven abrasive product used for cleaning, finishing, blending and deburring applications. A metal attachment system screws onto the holder.



UPC	Size	Grade	Color	Case Qty	Units
0-00-48011-05523-7	2 in x NH	AVFN	Blue	200	DC
0-00-48011-05527-5	2 in x NH	AMED	Maroon	200	DC
0-00-48011-05528-2	2 in x NH	ACRS	Brown	200	DC
0-00-48011-05530-5	3 in x NH	AVFN	Blue	100	DC
0-00-48011-05531-2	3 in x NH	AMED	Maroon	100	DC
0-00-48011-05532-9	3 in x NH	ACRS	Brown	100	DC

## Scotch-Brite™ Surface Conditioning Disc

Scotch-Brite™ Surface Conditioning Discs are best for finishing, cleaning and light deburring on flat metal surfaces.



UPC	Size	Grade	Color	Case Qty	Units
0-00-48011-27673-1	4½ in x NH	AVFN	Blue	10	DC
0-00-48011-27672-4	4½ in x NH	AMED	Blue	50	DC
0-00-48011-27671-7	4½ in x NH	ACRS	Maroon	10	DC
0-00-48011-27676-2	5 in x NH	AVFN	Maroon	50	DC
0-00-48011-27675-5	5 in x NH	AMED	Brown	10	DC
0-00-48011-27674-8	5 in x NH	ACRS	Brown	50	DC
0-00-48011-27679-3	7 in x NH	AVFN	Blue	10	DC
0-00-48011-27678-6	7 in x NH	AMED	Blue	50	DC
0-00-48011-27677-9	7 in x NH	ACRS	Maroon	10	DC

## Disc, Clean and Strip

### Scotch-Brite™ Clean and Strip Disc

Aggressive, open web disc for cleaning welds, removing rust and paint. May be mounted on a straight shaft tool or bench motor.



UPC	Size	Grade	Color	Case Qty	Units
0-00-48011-07460-3	4 in x ¼ in	SXCS	Black	25	DC
0-00-48011-00940-7	4 in x 3/8 in	SXCS	Black	25	DC
0-00-48011-00941-4	4 in x ½ in	SXCS	Black	25	DC
0-00-48011-00942-1	4 in x 5/8 in	SXCS	Black	25	DC
0-00-48011-00948-3	6 in x ½ in	SXCS	Black	15	DC
0-00-48011-00949-0	6 in x 5/8 in	SXCS	Black	15	DC
0-00-48011-00950-6	6 in x 7/8 in	SXCS	Black	15	DC
0-00-48011-00945-2	6 in x NH	SXCS	Black	15	DC

## Disc, Coating Removal

### Scotch-Brite™ Coating Removal Disc

Heavy duty, semi-open web used to clean rust and paint. Contains a backing that mounts to hook and loop pads.



UPC	Size	Grade	Case Qty	Units
0-00-48011-18424-1	4½ in x NH	SXCS	20	DC
0-00-48011-18355-8	5 in x NH	SXCS	20	DC
0-00-48011-18485-2	7 in x NH	SXCS	20	DC

## Disc, Bristle

### Scotch-Brite™ Bristle Disc

Brush-like bristle disc removes coarse coatings from the large, open areas of a workpiece. Works on right angle tools quickly and easily with little or no pressure.



UPC	Size	Grade	Color	Case Qty	Units
0-00-48011- <b>33054</b> -9	4½ in	36	Brown	10	EA
0-00-48011- <b>24241</b> -5	4½ in	50	Green	10	EA
0-00-48011- <b>24242</b> -2	4½ in	80	Yellow	10	EA
0-00-48011- <b>24243</b> -9	4½ in	120	White	10	EA

### Scotch-Brite™ Roloc™ Bristle Disc

Brush-like bristle disc removes coatings from the large, open areas of a work piece. Works on right angle tools quickly and easily with little or no pressure.




UPC	Size	Grade	Color	Case Qty	Units
0-00-48011- <b>18730</b> -3	2 in x 5/8 in	50	Green	40	EA
0-00-48011- <b>18732</b> -7	2 in x 5/8 in	80	Yellow	40	EA
0-00-48011- <b>18734</b> -1	3 in x 5/8 in	50	Green	40	EA
0-00-48011- <b>18736</b> -5	3 in x 5/8 in	80	Yellow	40	EA

## Disc, Fibre

### 3M™ Fibre Disc 381C

An aluminum oxide disc constructed on a fibre backing.



UPC	Size	Grade	Case Qty	Units
0-00-51144- <b>77596</b> -5	4½ in x 7/8 in	36	100	DC
0-00-51144- <b>77597</b> -2	4½ in x 7/8 in	50	100	DC
0-00-51144- <b>77598</b> -9	4½ in x 7/8 in	60	100	DC
0-00-51144- <b>77599</b> -6	4½ in x 7/8 in	80	100	DC
0-00-51144- <b>81372</b> -8	5 in x 7/8 in	36	100	DC
0-00-51144- <b>81375</b> -9	5 in x 7/8 in	50	100	DC
0-00-51144- <b>01727</b> -0	5 in x 7/8 in	60	100	DC
0-00-51144- <b>20054</b> -2	5 in x 7/8 in	80	100	DC
0-00-51144- <b>81373</b> -5	7 in x 7/8 in	36	100	DC
0-00-51144- <b>81376</b> -6	7 in x 7/8 in	50	100	DC
0-00-51144- <b>01741</b> -6	7 in x 7/8 in	60	100	DC
0-00-51144- <b>01740</b> -9	7 in x 7/8 in	80	100	DC

### 3M™ Fibre Disc 501C


A versatile alumina zirconia disc constructed on a fibre backing works well on stainless and mild steel.



UPC	Size	Grade	Case Qty	Units
0-00-51111- <b>50412</b> -3	5 in x 7/8 in	36	100	DC
0-00-51111- <b>50420</b> -8	5 in x 7/8 in	50	100	DC
0-00-51111- <b>50421</b> -5	5 in x 7/8 in	60	100	DC
0-00-51111- <b>50422</b> -2	5 in x 7/8 in	80	100	DC
0-00-51111- <b>50426</b> -0	7 in x 7/8 in	36	100	DC
0-00-51111- <b>50425</b> -3	7 in x 7/8 in	50	100	DC
0-00-51111- <b>50427</b> -7	7 in x 7/8 in	60	100	DC
0-00-51111- <b>50428</b> -4	7 in x 7/8 in	80	100	DC

### 3M™ Fibre Disc 785C


A ceramic abrasive grain disc constructed on a fibre backing. Features grinding aid for cooler grinding; great for working on heat-sensitive metals like stainless steel.



UPC	Size	Grade	Case Qty	Units
0-00-51144- <b>13930</b> -9	5 in x 7/8 in	36	100	DC
0-00-51144- <b>13928</b> -6	5 in x 7/8 in	50	100	DC
0-00-51144- <b>13977</b> -4	5 in x 7/8 in	60	100	DC
0-00-51144- <b>13926</b> -2	5 in x 7/8 in	80	100	DC
0-00-51144- <b>13936</b> -1	7 in x 7/8 in	36	100	DC
0-00-51144- <b>13934</b> -7	7 in x 7/8 in	50	100	DC
0-00-51144- <b>13933</b> -0	7 in x 7/8 in	60	100	DC
0-00-51144- <b>13932</b> -3	7 in x 7/8 in	80	100	DC

### 3M™ Roloc™ Fibre Disc 983C

A premium ceramic abrasive grain 3M™ Roloc™ disc constructed on a fibre backing.



UPC	Size	Grade	Case Qty	Units
0-00-51144- <b>22352</b> -7	2 in	36	200	DC
0-00-51144- <b>22353</b> -4	2 in	60	200	DC
0-00-51144- <b>22354</b> -1	2 in	80	200	DC
0-00-51144- <b>22349</b> -7	3 in	36	200	DC
0-00-51144- <b>85890</b> -3	3 in	50	200	DC
0-00-51144- <b>22350</b> -3	3 in	60	200	DC
0-00-51144- <b>22351</b> -0	3 in	80	200	DC

## Disc, Flap

### 3M™ Abrasive Flap Disc 747D, Type 27



A ceramic abrasive grain flap disc constructed on an X weight, durable cloth backing. Resin bonded for heat resistance. Features grinding aid for cooler grinding. The new standard for off hand grinding and finishing of metals. Provides a consistent rate of cut for a superior finish and it provides long-life performance that improves quality and lowers cost.

UPC	Size	Grade	Case Qty	Units
0-00-51111- <b>49613</b> -8	4½ in x 7/8 in	36	10	DC
0-00-51111- <b>49614</b> -5	4½ in x 7/8 in	50	10	DC
0-00-51111- <b>49615</b> -2	4½ in x 7/8 in	60	10	DC
0-00-51111- <b>49616</b> -9	4½ in x 7/8 in	80	10	DC

### 3M™ Flap Discs 566A

When you want it all, choose the versatile 566A flap disc for a great balance of cut and life on any metalworking application. Alumina Zirconia works on all metals.



UPC	Size	Grade	Case Qty	Units
0-00-51141- <b>55362</b> -7	4-1/2 in x 5/8-11	40	10	DC
0-00-51141- <b>55363</b> -4	4-1/2 in x 5/8-11	60	10	DC
0-00-51141- <b>55364</b> -1	4-1/2 in x 5/8-11	80	10	DC
0-00-51141- <b>55366</b> -5	4-1/2 in x 7/8 in	40	10	DC
0-00-51141- <b>55367</b> -2	4-1/2 in x 7/8 in	60	10	DC
0-00-51141- <b>55368</b> -9	4-1/2 in x 7/8 in	80	10	DC
0-00-51141- <b>55370</b> -2	7 in x 5/8-11	40	5	DC
0-00-51141- <b>55371</b> -9	7 in x 5/8-11	60	5	DC
0-00-51141- <b>55372</b> -6	7 in x 5/8-11	80	5	DC
0-00-51141- <b>55374</b> -0	7 in x 7/8 in	40	5	DC
0-00-51141- <b>55375</b> -7	7 in x 7/8 in	60	5	DC
0-00-51141- <b>55376</b> -4	7 in x 7/8 in	80	5	DC
0-00-51141- <b>55402</b> -0	4-1/2 in x 5/8-11	40	10	DC
0-00-51141- <b>55403</b> -7	4-1/2 in x 5/8-11	60	10	DC
0-00-51141- <b>55404</b> -4	4-1/2 in x 5/8-11	80	10	DC
0-00-51141- <b>55406</b> -8	4-1/2 in x 7/8 in	40	10	DC
0-00-51141- <b>55407</b> -5	4-1/2 in x 7/8 in	60	10	DC
0-00-51141- <b>55408</b> -2	4-1/2 in x 7/8 in	80	10	DC
0-00-51141- <b>55410</b> -5	7 in x 5/8-11	40	5	DC
0-00-51141- <b>55411</b> -2	7 in x 5/8-11	60	5	DC
0-00-51141- <b>55412</b> -9	7 in x 5/8-11	80	5	DC
0-00-51141- <b>55414</b> -3	7 in x 7/8 in	40	5	DC
0-00-51141- <b>55415</b> -0	7 in x 7/8 in	60	5	DC
0-00-51141- <b>55416</b> -7	7 in x 7/8 in	80	5	DC

### 3M™ Flap Disc Adapter Nut 88765

Adaptor nut to be used with 3M™ Abrasive Flap Discs.



UPC	Case Qty	Units
0-00-51144- <b>88765</b> -1	5	EA

## Disc, Paper

### 3M™ Stikit™ Paper Disc Roll 236U

A good, general purpose aluminum oxide disc for sanding paint, primer, wood, metal, plastic and fiberglass. Features a stronger C-wt, paper backing for more aggressive sanding and an open, load-resistant coating for extra life and increased cut.



UPC	Size	Grade	Case Qty	Units
0-00-51141- <b>55540</b> -9	5 in x NH	P80	4	RI
0-00-51141- <b>55541</b> -6	5 in x NH	P100	4	RI
0-00-51141- <b>55542</b> -3	5 in x NH	P120	4	RI
0-00-51141- <b>55543</b> -0	5 in x NH	P150	4	RI
0-00-51141- <b>55544</b> -7	5 in x NH	P180	4	RI
0-00-51141- <b>55545</b> -4	5 in x NH	P220	4	RI

### 3M™ Hookit™ Paper Disc 236U

A good general use aluminum oxide sanding disc for use with 5-inch random orbital sanders with hook-and-loop disc pads. Constructed on a C-wt paper backing and features a load-resistant coating.



UPC	Size	Grade	Case Qty	Units
0-00-51141- <b>55579</b> -9	5 in x NH	P80	250	DC
0-00-51141- <b>55581</b> -2	5 in x NH	P120	250	DC
0-00-51141- <b>55582</b> -9	5 in x NH	P150	250	DC
0-00-51141- <b>55584</b> -3	5 in x NH	P180	250	DC
0-00-51141- <b>55583</b> -6	5 in x NH	P220	250	DC

## Disc, Cloth

### 3M™ Roloc™ Cloth Disc 361F


An aluminum oxide Roloc™ Disc constructed on a YF weight, water resistant polyester cloth backing. Resin bonded for heat resistance. Can be run wet or dry.



UPC	Size	Grade	Case Qty	Units
0-00-51144- <b>22398</b> -5	2 in	36	200	DC
0-00-51144- <b>22399</b> -2	2 in	50	200	DC
0-00-51144- <b>22400</b> -5	2 in	60	200	DC
0-00-51144- <b>22401</b> -2	2 in	80	200	DC
0-00-51144- <b>22393</b> -0	3 in	36	200	DC
0-00-51144- <b>22394</b> -7	3 in	50	200	DC
0-00-51144- <b>22395</b> -4	3 in	60	200	DC
0-00-51144- <b>22404</b> -3	3 in	80	200	DC

### 3M™ Flexible Diamond Heavy Duty QRS Cloth Disc 6022J

For hard to grind material, stone, glass, ceramic, metal, carbide, composites. Better finish without sacrificing cut rates. Metal plated bond securely anchors micron graded diamonds to PSA (self adhesive) backing.



UPC	Size	Grade	Case Qty	Units
0-00-51115- <b>19760</b> -4	7 in x 1 in	M300 Micron	1	DC
0-00-51115- <b>19755</b> -0	7 in x 1 in	M250 Micron	1	DC
0-00-51115- <b>19750</b> -5	7 in x 1 in	M125 Micron	1	DC
0-00-51115- <b>19761</b> -1	9 in x 1 in	M300 Micron	1	DC
0-00-51115- <b>19756</b> -7	9 in x 1 in	M250 Micron	1	DC
0-00-51115- <b>19751</b> -2	9 in x 1 in	M125 Micron	1	DC
0-00-51115- <b>19746</b> -8	9 in x 1 in	M74 Micron	1	DC
0-00-51115- <b>19752</b> -9	10 in x 1 in	M125 Micron	1	DC
0-00-51115- <b>19747</b> -5	10 in x 1 in	M74 Micron	1	DC
0-00-51115- <b>19742</b> -0	10 in x 1 in	M40 Micron	1	DC

## Disc Accessories

### 3M™ Roloc™ Shank 45102

This shank has a 1/4" diameter to fit 1/4" collet chucks or drill chucks. It also has a 1/4–20 external thread to fit 3M™ Roloc™ Disc Pads with 1/4–20 internal threads



UPC	Size	Case Qty	Units
0-00-51144- <b>45102</b> -9	1/4–20 EXT, Shank: 1/4 in Diameter	50	EA

### 3M™ Roloc™ Disc Pads

Optimize abrasive performance with the right backup system. Select the 3M™ Roloc™ Disc Pad style and hardness to support your attachment system and the way you work. Mount directly to tools with threaded shafts or use with 3M™ Roloc™ Shank to fit collet chuck tools.



UPC	Size	Grade	Case Qty	Units
0-00-51144- <b>45095</b> -4	2 in	Med	5	PD
0-00-51144- <b>45096</b> -1	2 in	Hard	5	PD
0-00-51144- <b>45097</b> -8	2 in	X Hard	5	PD
0-00-51144- <b>45092</b> -3	3 in	Med	5	PD
0-00-51144- <b>45091</b> -6	3 in	Hard	5	PD
0-00-51144- <b>45093</b> -0	3 in	X Hard	5	PD

### 3M™ Stikit™ Disc Pads

Specially designed for use with 3M™ Stikit™ Discs.




UPC	Size	Case Qty	Units
0-00-51144- <b>05575</b> -3	5 in x 3/4 in	10	PD
0-00-51144- <b>45215</b> -6	5 in x 3/4 in	10	PD
0-00-51111- <b>55813</b> -3	5 in x 1/2 in	5	PD
0-00-51144- <b>82189</b> -1	5 in x 3/4 in	10	PD



## Disc Accessories (cont.)

### 3M™ Hookit™ Disc Pads

Choose a thin, firm 3M™ Hookit™ Low Profile Disc Pad for more stock removal and a tapered, thicker pad for feather edging. 45° tapered edge. For use with a rotary sander or random orbital sander (ROS).



UPC	Size	Case Qty	Units
0-00-51144- <b>85096</b> -9	5 in x 5/8 in; For use with: Rotary	10	PD
0-00-51144- <b>85105</b> -8	5 in x 3/4 in; For use with: Rotary	10	PD
0-00-51131- <b>05775</b> -3	5 in x 3/4 in; For use with: ROS	10	PD
0-00-51141- <b>28709</b> -6	6 in; For use with: ROS	10	PD

### 3M™ Disc Pad Hub

For use to mount fibre discs and disc pad. Use retainer nuts for discs with center holes.



UPC	Size	Case Qty	Units
0-00-51141- <b>28476</b> -7	2-1/2 in x 5/8-11 INT; For use with: 4-1/2 in to 9 in face plates; Low Profile	10	EA
0-00-51144- <b>45205</b> -7	2-1/2 in x 5/8-11 INT; For use with: 4-1/2 in to 9 in face plates	10	EA
0-00-51144- <b>88743</b> -9	2-1/2 in x 5/8-11 INT; For use with: Short shaft tools	10	EA
0-00-51141- <b>28442</b> -2	2-1/2 in x 3/8-24 INT; For use with: Short shaft tools	10	EA
0-00-51144- <b>45190</b> -6	4-1/2 in x 5/8-11 INT; For use with: 7 in and 9 in face plates	10	EA

### 3M™ Disc Pad Holder 917 (Hook-and-Loop)

Use with 7" diameter hook-and-loop discs. Use on right angle grinders and sanders. Pad holder has 5/16" thick foam and T Hooks.



UPC	Size	Case Qty	Units
0-00-48011- <b>09450</b> -2	5/8-11 INT	1	EA

### 3M™ Disc Retainer Nut


For use to mount fibre discs and disc pad. Use retainer nuts for discs with center holes; compatible with 1-1/4" spanner wrench with 1/4" pins.



UPC	Size	Case Qty	Units
0-00-51111- <b>51047</b> -6	5/16 in x 5/8-11 INT	10	EA
0-00-51144- <b>05622</b> -4	3/8 in x 5/8-11 INT	10	EA
0-00-51144- <b>05621</b> -7	1/2 in x 5/8-11 INT	10	EA
0-00-51144- <b>05620</b> -0	5/8 in x 5/8-11 INT	10	EA

### 3M™ Disc Pad Holder 905


Hook-and-loop pad holders for quick attachment of Scotch-Brite™ Discs. Use on Random Orbital Sanders with 5/16-24 internal thread. Pad holder has 1/4" thick foam and T Hooks.



UPC	Size	Case Qty	Units
0-00-48011- <b>09448</b> -9	5/16-24 EXT	1	EA

### 3M™ Disc Pad Holder 9145 (Hook-and-Loop)

Use with 4-1/2" diameter hook-and-loop discs. Use on right angle grinders. Pad holder has 1/8" thick foam and T Hooks.



UPC	Size	Case Qty	Units
0-00-48011- <b>14111</b> -4	5/8-11 INT	1	EA

### 3M™ Disc Pad Holder 915 (Hook-and-Loop)

Use with 5" diameter hook-and-loop discs. Use on right angle grinders. Pad holder has 1/8" thick foam and T Hooks.



UPC	Size	Case Qty	Units
0-00-48011- <b>05680</b> -7	5/8-11 INT	1	EA

### 3M™ Disc Pad Holder 922

Use with 2" diameter hook-and-loop discs. Pad holder has 1/16" thick foam and 3M™ Dual-Lok™ Hooks, 1/4" shaft.




UPC	Size	Case Qty	Units
0-00-48011- <b>07494</b> -8	2 in	10	EA

## Vibrator Sander rolls

### 3M™ Stikit™ Paper Vibrator Sander Roll 426U

- Silicon carbide on a A-wt. paper backing
- General use abrasive with a load resistant coating
- Produces the finest finish available for whitewood and sealer sanding with a consistent finish
- For hand sanding and dual-action applications



UPC	Size	Grade	Min/Case	Units
0-00-51141-27826-1	4½ in x 10 yd	80	10/10	RL
0-00-51141-27827-8	4½ in x 10 yd	100	10/10	RL
0-00-51141-27828-5	4½ in x 10 yd	120	10/10	RL
0-00-51141-27829-2	4½ in x 10 yd	150	10/10	RL
0-00-51141-27830-8	4½ in x 10 yd	180	10/10	RL
0-00-51141-27831-5	4½ in x 10 yd	220	10/10	RL

## Cut-Off Wheels

### 3M™ Green Corps™ Cut-off Wheel

Wheel is designed to provide high cut rates and long life on most materials including fiberglass, stainless steel, mild steel and aerospace alloys. Ideal for use on a wide variety of utility type cut off tools. Do not use on tools without guards.



UPC	Size	Case Qty	Units
0-00-51144-83487-7	2 in x 1/16 in x ¼ in	50	WH
0-00-51144-82238-6	3 in x 1/32 in x ¼ in	50	WH
0-00-51131-01989-8	3 in x 1/32 in x 3/8 in	50	WH
0-00-51131-01985-0	3 in x 1/32 in x 3/8 in	50	WH
0-00-51131-01990-4	3 in x 1/16 in x 3/8 in	50	WH
0-00-51131-01986-7	3 in x 1/16 in x 3/8 in	50	WH
0-00-51144-88755-2	4 in x 1/32 in x ¼ in	50	WH
0-00-51131-01994-2	4 in x 1/32 in x 3/8 in	50	WH
0-00-51144-83488-4	4 in x 1/16 in x 3/8 in	50	WH
0-00-51141-20275-4	4½ in x 3/64 in x 7/8 in	200	WH
0-00-51141-20276-1	5 in x 3/64 in x 7/8 in	4	PH

### 3M™ High Performance Cut-Off Wheels

3M ceramic abrasive grain for fast cut and long life. Innovative technology provides excellent product life and cut rates to increase productivity and throughput while lowering total abrasive costs. Specially formulated to be used on stainless and mild steel.



UPC	Size	Case Qty	Units
0-00-51115-66556-1	3 in x .035 in x 1/4 in	50	WH
0-00-51115-66557-8	3 in x .035 in x 3/8 in	50	WH
0-00-51115-66558-5	3 in x .06 in x 1/4 in	50	WH
0-00-51115-66559-2	3 in x .06 in x 3/8 in	50	WH
0-00-51115-66560-8	4 in x .035 in x 1/4 in	50	WH
0-00-51115-66561-5	4 in x .035 in x 3/8 in	50	WH
0-00-51115-66562-2	4 in x .035 in x 5/8 in	50	WH
0-00-51115-66563-9	4 in x .06 in x 3/8 in	50	WH
0-00-51115-66564-6	4 in x .09 in x 5/8 in	50	WH
0-00-51115-66565-3	4 in x .045 in x 5/8 in	50	WH
0-00-51115-66566-0	4 in x .06 in x 5/8 in	50	WH
0-00-51115-66567-7	4 in x .125 in x 3/8 in	50	WH
0-00-51115-66568-4	4-1/2 in x .045 in x 7/8 in	50	WH
0-00-51115-66569-1	5 in x .045 in x 7/8 in	50	WH
0-00-51115-66570-7	6 in x .045 in x 7/8 in	50	WH
0-00-51115-66571-4	7 in x .045 in x 7/8 in	50	WH
0-00-51115-66572-1	4 in x .045 in x 5/8 in	50	WH
0-00-51115-66574-5	4-1/2 in x .045 in x 7/8 in	50	WH
0-00-51115-66576-9	4-1/2 in x .09 in x 7/8 in	50	WH
0-00-51115-66578-3	4-1/2 in x .125 in x 7/8 in	50	WH
0-00-51115-66580-6	5 in x .045 in x 7/8 in	50	WH
0-00-51115-66582-0	5 in x .09 in x 7/8 in	50	WH
0-00-51115-66584-4	6 in x .045 in x 7/8 in	50	WH
0-00-51115-66586-8	7 in x .09 in x 7/8 in	50	WH
0-00-51115-66573-8	4-1/2 in x .045 in x 5/8-11	50	WH
0-00-51115-66575-2	4-1/2 in x .09 in x 5/8-11	50	WH
0-00-51115-66577-6	4-1/2 in x .125 in x 5/8-11	50	WH
0-00-51115-66579-0	5 in x .045 in x 5/8-11	50	WH
0-00-51115-66581-3	5 in x .09 in x 5/8-11	50	WH
0-00-51115-66583-7	6 in x .045 in x 5/8-11	50	WH
0-00-51115-66585-1	7 in x .09 in x 5/8-11	50	WH

## Cut-Off Wheels (cont.)

### 3M™ General Purpose Cut-off Wheels

General Purpose Cut-Off Wheel made with aluminum oxide mineral. For use in a variety of metal cutting applications, including carbon steel, stainless steel and aluminum.



UPC	Size	Case Qty	Units
0-00-51141-20448-2	4 in x 1/32 in x 3/8 in	200	WH
0-00-51141-20449-9	4 in x 1/16 in x 3/8 in	200	WH
0-00-51141-20447-5	6 in x 9/20 in x 7/8 in	100	WH

## Depressed Center Wheels

### 3M™ Green Corps™ Depressed Center Wheel

These 1/4" thick bonded wheels contain ceramic abrasive grain and product very high cut rates on a wide variety of metals.



UPC	Size	Grade	Case Qty	Units
0-00-51111-55960-4	4½ in x ¼ in	24	60	WH
0-00-51111-55961-1	4½ in x ¼ in	36	60	WH
0-00-51111-55991-8	4½ in x ¼ in x 7/8 in	24	60	WH
0-00-51111-55992-5	4½ in x ¼ in x 7/8 in	36	60	WH
0-00-51111-55958-1	7 in x ¼ in	24	20	WH
0-00-51111-55959-8	7 in x ¼ in	36	20	WH
0-00-51111-55989-5	7 in x ¼ in x 7/8 in	24	20	WH
0-00-51111-55990-1	7 in x ¼ in x 7/8 in	36	20	WH

### 3M™ High Performance Depressed Center Grinding Wheel

3M ceramic abrasive grain for fast cut and long life. Innovative technology provides excellent product life and cut rates to increase productivity and throughput while lowering total abrasive costs. Specially formulated to be used on stainless and mild steel.



UPC	Size	Case Qty	Units
0-00-51115-66555-4	4 in x 1/4 in x 3/8 in	20	WH
0-00-51115-66554-7	4 in x 1/4 in x 5/8 in	20	WH
0-00-51115-66544-8	4-1/2 in x 1/4 in x 7/8 in	20	WH
0-00-51115-66545-5	5 in x 1/4 in x 7/8 in	20	WH
0-00-51115-66546-2	6 in x 1/4 in x 7/8 in	20	WH
0-00-51115-66547-9	7 in x 1/4 in x 7/8 in	20	WH
0-00-51115-66548-6	9 in x 1/4 in x 7/8 in	20	WH
0-00-51115-66553-0	4-1/2 in x 1/4 in x 5/8-11	20	WH
0-00-51115-66549-3	5 in x 1/4 in x 5/8-11	20	WH
0-00-51115-66550-9	6 in x 1/4 in x 5/8-11	20	WH
0-00-51115-66551-6	7 in x 1/4 in x 5/8-11	20	WH
0-00-51115-66552-3	9 in x 1/4 in x 5/8-11	20	WH

### 3M™ Depressed Center Wheel

Depressed center wheels are an excellent economical solution for general purpose grinding and cutting applications on steel. **MUST BE USED ON A TOOL WITH A GUARD.**



UPC	Size	Grade	Case Qty	Units
0-00-51135-92314-6	4½ in x ¼ in x 5/8-11 INT	24	40	WH
0-00-51135-92312-2	4½ in x ¼ in x 7/8 in	24	40	WH
0-00-51135-92315-3	7 in x ¼ in x 5/8-11 INT	24	20	WH
0-00-51135-92313-9	7 in x ¼ in x 7/8 in	24	20	WH

## Grinding Wheels

### 3M™ Green Corps™ Cutting/Grinding Wheel, Type 27

Bonded wheels contain ceramic abrasive grain and produce very high cut rates on a wide variety of metals. MUST BE USED ON A TOOL WITH A GUARD.



UPC	Size	Grade	Case Qty	Units
0-00-51135- <b>92316</b> -0	4½ in x 1/8 in x 7/8 in	36	40	WH
0-00-51135- <b>92318</b> -4	4½ in x 1/8 in x 5/8 in -11 INT	36	40	WH
0-00-51135- <b>92317</b> -7	7 in x 1/8 in x 7/8 in	36	20	WH
0-00-51135- <b>92319</b> -1	7 in x 1/8 in x 5/8 in -11 INT	36	20	WH

### 3M™ Green Corps™ Flexible Grinding Wheel

These 1/8" thick bonded wheels contain ceramic abrasive grain and can be used on a wide variety of metals. When grinding, wheels produce less noise and vibration. Available in threaded "Quick Change" option.



UPC	Size	Grade	Case Qty	Units
0-00-51111- <b>51164</b> -0	4½ in x 1/8 in x 5/8 in -11	36	40	WH
0-00-51111- <b>51161</b> -9	4½ in x 1/8 in x 5/8 in -11	46	40	WH
0-00-51111- <b>51160</b> -2	4½ in x 1/8 in x 5/8 in -11	60	40	WH
0-00-51111- <b>50440</b> -6	4½ in x 1/8 in x 7/8 in	36	40	WH
0-00-51111- <b>50442</b> -0	4½ in x 1/8 in x 7/8 in	46	40	WH
0-00-51111- <b>50443</b> -7	4½ in x 1/8 in x 7/8 in	60	40	WH
0-00-51111- <b>50444</b> -4	4½ in x 1/8 in x 7/8 in	80	40	WH
0-00-51111- <b>51163</b> -3	7 in x 1/8 in x 5/8 in -11	36	40	WH
0-00-51111- <b>50445</b> -1	7 in x 1/8 in x 7/8 in	36	20	WH
0-00-51111- <b>50446</b> -8	7 in x 1/8 in x 7/8 in	46	20	WH
0-00-51111- <b>50447</b> -5	7 in x 1/8 in x 7/8 in	60	20	WH

## Unitized Wheels

### Scotch-Brite™ EXL Unitized Wheel

High performance and durability for deburring and finishing applications. A layered, durable unitized wheel construction



UPC	Size	Grade	Color	Case Qty	Units
0-00-48011- <b>15532</b> -6	3 in x ½ in x ¼ in	2AMED	Gray/Black	20	WH
0-00-48011- <b>13717</b> -9	3 in x ½ in x ¼ in	2SFIN	Gray/Purple	20	WH
0-00-48011- <b>28199</b> -5	3 in x ½ in x ¼ in	3SFIN	Gray/Pink	20	WH
0-00-48011- <b>15827</b> -3	8 in x ¼ in x ½ in	2SFIN	Gray/Purple	8	WH
0-00-48011- <b>17508</b> -9	8 in x ¼ in x 5/8 in	2SFIN	Gray/Purple	8	WH
0-00-48011- <b>15844</b> -0	8 in x ½ in x ½ in	2SFIN	Gray/Purple	4	WH

## Sanding Sponges

### 3M™ Small Area Sanding Sponge

For either dry or wet sanding. Ideal for sanding wood, paint, metal, plastic and drywall. Rinse and reuse.



UPC	Size	Grade	Case Qty	Units
0-00-51111- <b>10628</b> -0	3.75 in x 2.625 in x 1 in	Extra Fine/Fine	24	EA
0-00-51131- <b>50038</b> -9	3.75 in x 2.625 in x 1 in	Fine/Medium	24	EA
0-00-51131- <b>50037</b> -2	3.75 in x 2.625 in x 1 in	Medium/Coarse	24	EA

### 3M™ Large Area Sanding Sponge

Ideal for either dry or wet sanding of wood, paint, metal, plastic and drywall. When finished simply rinse and reuse.



UPC	Size	Grade	Case Qty	Units
0-00-51115- <b>07066</b> -2	4.875 in x 2.875 in x 1	Extra Fine/Fine	12	EA
0-00-51115- <b>07067</b> -9	4.875 in x 2.875 in x 1	Fine/Medium	12	EA
0-00-51115- <b>07068</b> -6	4.875 in x 2.875 in x 1	Medium/Coarse	12	EA

## Sanding Sponges (cont.)

### 3M™ Drywall Sanding Sponge

Ideal for sanding drywall and plaster during spot repair. When finished, simply rinse and reuse.



UPC	Size	Case Qty	Units
0-00-51115- <b>07056</b> -3	4.875 in x 2.875 in x 1 in	24	EA

### 3M™ Sanding Sponge

Ideal for dry or wet sanding of wood, paint, metal, plastic and drywall. When finished, simply rinse and reuse. Conformable, comfortable, flexible and convenient.



UPC	Size	Grade	Case Qty	Units
0-00-51115- <b>00409</b> -4	3.75 in x 2.625 in x 1 in	Fine	24	EA
0-00-51115- <b>00408</b> -7	3.75 in x 2.625 in x 1 in	Medium	24	EA
0-00-51115- <b>12065</b> -7	3.75 in x 2.625 in x 1 in	Fine grit	4	PK
0-00-51115- <b>12066</b> -4	3.75 in x 2.625 in x 1 in	Medium grit	4	PK

## Sanding Screens

### 3M™ Sanding Screen 9089NA-CC

Made to fit most drywall sanding tools. Made with a sharp synthetic mineral for long-lasting performance. Waterproof and can be rinsed for reuse. Features an open mesh cloth backing which reduces loading.



UPC	Size	Grade	Case Qty	Units
0-00-51131- <b>50215</b> -4	4-3/16 in x 11-1/4 in	Fine	20	PK

### 3M™ Drywall Sanding Screen 9090NA-DC

Made to fit most drywall sanding tools. Made with a sharp silicon carbide mineral for long-lasting performance. Waterproof and can be rinsed for reuse. Features an open mesh cloth backing which reduces loading. Pre-cut for easy attachment to hand/pole sander.



UPC	Size	Grade	Case Qty	Units
0-00-51131- <b>53738</b> -5	4-3/16 in x 11-1/4 in	Medium Grit	10	PK

### 3M™ Pro-Pak Drywall Sanding Screen

Made to fit most drywall sanding tools. Made with a sharp synthetic mineral for long-lasting performance. Waterproof and can be rinsed for reuse. Features an open mesh cloth backing which reduces loading.



UPC	Size	Grade	Case Qty	Units
0-00-51144- <b>99436</b> -6	4-3/16 in x 11-1/4 in	220 grit	10	PK
0-00-51144- <b>99437</b> -3	4-3/16 in x 11-1/4 in	150 grit	10	PK
0-00-51144- <b>99438</b> -0	4-3/16 in x 11-1/4 in	150 grit	10	PK

## Sanding Sheets

### 3M™ Drywall Sanding Sheets

Fit most drywall sanding tools. Made with sharp silicon carbide mineral for long-lasting performance. Designed for sanding drywall joints, patching compounds and plaster.



UPC	Size	Grade	Case Qty	Units
0-00-51111- <b>09504</b> -1	4-3/16 in x 11-1/4 in	Fine	20	PK
0-00-51111- <b>09505</b> -8	4-3/16 in x 11-1/4 in	Medium Grit	20	PK

### 3M™ Drywall Sanding Sheets 10204

Pre-cut sheets die-cut to fit most drywall sanding tools. Made with sharp synthetic mineral for long lasting performance.



UPC	Size	Grade	Case Qty	Units
0-00-51144- <b>10204</b> -4	4-3/16 in x 11-1/4 in	100 grit	1000	EA

### 3M™ Tri-M-ite™ Paper Drywall Sheet 10207

Pre-cut sheets die-cut to fit most drywall sanding tools. Made with sharp synthetic mineral for long lasting performance.




UPC	Size	Grade	Case Qty	Units
0-00-51144- <b>10207</b> -5	4-3/16 in x 11-1/4 in	80 grit	1000	EA

## Sanding Sheets (cont.)

### 3M™ Pro-Pak Drywall Sanding Sheet

Designed for sanding drywall joints, patching compounds and plaster. Made with sharp synthetic mineral for long-lasting performance. Pre-cut and die-cut to fit most drywall sanding tools.



UPC	Size	Grade	Case Qty	Units
0-00-51144- <b>99431</b> -1	4.1875 in x 11.25 in	150 grit	10	PK
0-00-51144- <b>99430</b> -4	4.1875 in x 11.25 in	120 C grit	10	PK
0-00-51144- <b>10204</b> -4	4 3/16 in x 11 1/4 in	100 grit	10	PK

### 3M™ Cloth Sheet 011K

Sheet constructed on a J weight, light and flexible cloth backing.



UPC	Size	Grade	Case Qty	Units
0-00-51144- <b>02431</b> -5	9 in x 11 in	FIN	250	SH
0-00-51144- <b>02432</b> -2	9 in x 11 in	MED	250	SH
0-00-51144- <b>02433</b> -9	9 in x 11 in	CRS	250	SH

### 3M™ Paper Sheet 336U/346U

An aluminum oxide sheet constructed on a C weight, intermediate paper backing. Resin bonded for heat resistance.



UPC	Size	Grade	Case Qty	Units
0-00-51144- <b>02114</b> -7	9 in x 11 in	100	1000	SH
0-00-51144- <b>02113</b> -0	9 in x 11 in	120	1000	SH
0-00-51144- <b>02112</b> -3	9 in x 11 in	150	1000	SH

### 3M™ Silicon Carbide Paper Sheet 426U

A silicon carbide sheet constructed on an A weight, light paper backing. Features an antiloading stearate coating.



UPC	Size	Grade	Case Qty	Units
0-00-51141- <b>27844</b> -5	9 in x 11 in	100	1000	SH
0-00-51141- <b>27845</b> -2	9 in x 11 in	120	1000	SH
0-00-51141- <b>27846</b> -9	9 in x 11 in	150	1000	SH
0-00-51141- <b>27847</b> -6	9 in x 11 in	180	1000	SH
0-00-51141- <b>27848</b> -3	9 in x 11 in	220	1000	SH

### 3M™ Wetordry™ Paper Sheet 413Q

A silicon carbide sheet constructed on an A weight light paper backing. Can be run wet or dry.



UPC	Size	Grade	Case Qty	Units
0-00-51144- <b>02007</b> -2	9 in x 11 in	220	500	SH
0-00-51144- <b>02006</b> -5	9 in x 11 in	240	250	SH
0-00-51144- <b>02005</b> -8	9 in x 11 in	280	250	SH
0-00-51144- <b>02004</b> -1	9 in x 11 in	320	500	SH
0-00-51144- <b>02003</b> -4	9 in x 11 in	360	250	SH
0-00-51144- <b>02002</b> -7	9 in x 11 in	400	500	SH
0-00-51144- <b>02001</b> -0	9 in x 11 in	500	250	SH
0-00-51144- <b>02000</b> -3	9 in x 11 in	600	500	SH

### 3M™ Wetordry™ Paper Sheet 431Q

A silicon carbide Wetordry™ abrasive product constructed on a C weight, intermediate paper backing. Can be run wet or dry.



UPC	Size	Grade	Case Qty	Units
0-00-51144- <b>02018</b> -8	9 in x 11 in	80	250	SH
0-00-51144- <b>02017</b> -1	9 in x 11 in	100	250	SH
0-00-51144- <b>02016</b> -4	9 in x 11 in	120	250	SH
0-00-51144- <b>02015</b> -7	9 in x 11 in	150	250	SH

# Adhesives

## 3M™ HoldFast 70 Spray Adhesive

An extremely versatile, fast tacking industrial grade spray adhesive with a unique wide-web spray pattern. Ideal for bonding a variety of substrates, including polystyrene.

- Extremely versatile holding power to replace nails and other fasteners
- Very fast tacking for immediate bonding
- Unique wide web spray pattern with heavy body and low soak-in for vertical and horizontal surfaces
- Bonds polystyrene without degrading surface
- For waterproofing, drainage mat installation, expansion joints, foam board installation, geotextile seaming, and more

UPC	Size	Color	Case Qty	Units
0-00-51115- <b>32201</b> -3	Mini Cylinder Net Wt. 8.5 lbs	Clear	1	EA
0-00-48011- <b>61690</b> -2	Large Cylinder Net Wt. 27.3 lbs	Clear	1	EA
0-00-48011- <b>61691</b> -9	Intermediate Cylinder Net Wt. 139 lbs	Clear	1	EA
0-00-48011- <b>61692</b> -6	Jumbo Cylinder Net Wt. 288 lbs	Clear	1	EA



## 3M™ Hi-Strength 90 Spray Adhesive

- Hi-strength, fast tacking spray adhesive
- Bonds to concrete, wood, MDF, laminates, and polyethylene
- Excellent moisture resistance
- Product is available in regular, inverted, and low VOC version

UPC	Size	Color	Case Qty	Units
0-00-21200- <b>43797</b> -7	5 gallon	Clear	1	PA
0-00-51111- <b>07278</b> -3	Net Wt. 17.6 oz. (Inverted)	Clear	12	CN
0-00-21200- <b>30023</b> -3	Net Wt. 17.6 oz.	Clear	12	CN
0-00-51111- <b>97957</b> -0	Net Wt. 19 oz. (Low VOC)	Clear	12	CN
0-00-21200- <b>41599</b> -9	Mini Cylinder Net Wt. 15.6 lbs	Clear	1	EA
0-00-21200- <b>41554</b> -8	Large Cylinder Net Wt. 28.8 lbs.	Clear	1	EA

# Cylinders

## 3M™ Spray Cylinder Adhesive 60 CA

A low VOC general purpose industrial grade adhesive. This adhesive brings extraordinary value as it has exceptionally high solids and meets SCAQMD Rule 1168 Compliant Contact Adhesive. This adhesive is designed for temporary or permanent bonds on softer substrates like fabrics, foams, plastics, and heavy papers to wood, glass or steel. It is a proven adhesive technology for manufactured housing, RV and marine industries for ABS tubs and insulation bonding.



UPC	Size	Color	Case Qty	Units
0-00-48011- <b>61687</b> -2	Large Cylinder Net Wt. 27.2 lbs	Clear	1	EA
0-00-48011- <b>61688</b> -9	Intermediate Cylinder Net Wt. 129.2 lbs	Clear	1	EA
0-00-48011- <b>61689</b> -6	Jumbo Cylinder Net Wt. 276 lbs	Clear	1	EA

## 3M™ Non-Flammable FoamFast Cylinder Spray Adhesive 74NF

Non-flammable, extremely fast tacking industrial grade spray adhesive for bonding foam and fabric. Used for bonding flexible urethane or latex foam together and to other materials such as wood, metal, and plastics.



UPC	Size	Color	Case Qty	Units
0-00-51115- <b>25798</b> -8	Mini Cylinder Net Wt. 10.5 lbs	Clear	1	EA
0-00-21200- <b>97160</b> -0	Large Cylinder Net Wt. 30 lbs	Clear	1	EA
0-00-21200- <b>97161</b> -7	Intermediate Cylinder Net Wt. 185.6 lbs	Clear	1	EA
0-00-21200- <b>97162</b> -4	Jumbo Cylinder Net Wt. 371.7 lbs	Clear	1	EA

## 3M™ Foam Fast Cylinder Spray Adhesive 74

Extremely fast tacking industrial grade spray adhesive. Used for bonding flexible urethane or latex foam together and other materials such as wood, metal and plastics.



UPC	Size	Color	Case Qty	Units
0-00-21200- <b>49919</b> -7	Large Cylinder Net Wt. 30.3 lbs	Clear	1	EA
0-00-51115- <b>25741</b> -4	Intermediate Cylinder Net Wt. 148.5 lbs	Clear	1	EA
0-00-51115- <b>25742</b> -1	Jumbo Cylinder Net Wt. 297 lbs	Clear	1	EA

## 3M™ Polystyrene Insulation Cylinder Spray Adhesive 78 ET

Tacky industrial grade spray adhesive with a long open time. Bonds polystyrene with no surface degradation. Uniform spray pattern for fast and easy application.



UPC	Size	Color	Case Qty	Units
0-00-48011- <b>61693</b> -3	Large Cylinder Net Wt. 29.3 lbs	Clear	1	EA
0-00-48011- <b>61695</b> -7	Large Cylinder Net Wt. 29.3 lbs	Green	1	EA
0-00-51115- <b>25705</b> -6	Intermediate Cylinder Net Wt. 139 lb	Green	1	EA
0-00-48011- <b>61694</b> -0	Jumbo Cylinder Net Wt. 298 lbs	Clear	1	EA
0-00-48011- <b>61696</b> -4	Jumbo Cylinder Net Wt. 298 lbs	Green	1	EA

## 3M™ Hi-Strength Cylinder Spray Adhesive 92

High performance, very high temperature resistant industrial grade spray adhesive. It features a fast tacking adhesive designed for high pressure laminations, particularly decorative laminate to particle board. It can also be used for veneers, fiberglass, headliners, foams, fabrics, glass, mirrors, cork, tile, rubber and steel.



UPC	Size	Color	Case Qty	Units
0-00-48011- <b>61697</b> -1	Large Cylinder Net Wt. 29.3 lbs	Clear	1	EA
0-00-48011- <b>61700</b> -8	Large Cylinder Net Wt. 29.3 lbs	Red	1	EA
0-00-48011- <b>61698</b> -8	Intermediate Cylinder Net Wt. 139 lbs	Clear	1	EA
0-00-48011- <b>61701</b> -5	Intermediate Cylinder Net Wt. 139 lbs	Red	1	EA
0-00-48011- <b>61699</b> -5	Jumbo Cylinder Net Wt. 279 lbs	Clear	1	EA
0-00-48011- <b>61702</b> -2	Jumbo Cylinder Net Wt. 279 lbs	Red	1	EA



## Cylinders (cont.)

### 3M™ Hi-Strength Cylinder Spray Adhesive 94 ET

High performance, industrial grade spray adhesive. Creates high strength, postformable bonds to a variety of substrates like decorative laminates, metal and some rubbers. Is SCAQMD Rule 1168 compliant and helps contribute to LEED® credits.



UPC	Size	Color	Case Qty	Units
0-00-51111- <b>97980</b> -8	Intermediate Cylinder Net Wt. 128 lbs	Clear	1	EA
0-00-51111- <b>97979</b> -2	Large Cylinder Net Wt. 26.2 lbs	Clear	1	EA
0-00-51111- <b>97981</b> -5	Jumbo Cylinder Net Wt. 266 lbs	Clear	1	EA
0-00-51111- <b>97986</b> -0	Large Cylinder Net Wt. 26.2 lbs	Red	1	EA
0-00-51111- <b>97987</b> -7	Intermediate Cylinder Net Wt. 128 lbs	Red	1	EA
0-00-51111- <b>97988</b> -4	Jumbo Cylinder Net Wt. 266 lbs	Red	1	EA

### 3M™ Hi-Strength Postforming Cylinder Spray Adhesive 94 CA

Low VOC, high performance, postformable industrial grade spray adhesive. Bonds to a variety of demanding substrates like decorative laminates, metal and some rubbers. Is SCAQMD Rule 1168 and helps contribute to LEED® credits. High solids for increased coverage.



UPC	Size	Color	Case Qty	Units
0-00-51115- <b>25018</b> -7	Mini Cylinder Net Wt. 7.6 lbs	Red	1	EA
0-00-48011- <b>61703</b> -9	Large Cylinder Net Wt. 26.2 lbs	Clear	1	EA
0-00-48011- <b>61663</b> -6	Large Cylinder Net Wt. 26.2 lbs	Red	1	EA
0-00-48011- <b>61704</b> -6	Intermediate Cylinder Net Wt. 150 lbs	Clear	1	EA
0-00-48011- <b>61664</b> -3	Intermediate Cylinder Net Wt. 150 lbs	Red	1	EA
0-00-48011- <b>61705</b> -3	Jumbo Cylinder Net Wt. 300 lbs.	Clear	1	EA
0-00-48011- <b>61665</b> -0	Jumbo Cylinder Net Wt. 266 lbs	Red	1	EA

## Cylinder Accessories

### 3M™ Cylinder Adhesive Hoses

For use with any 3M™ Cylinder Spray Adhesive products.



UPC	Size	Case Qty	Units
0-00-51115- <b>25036</b> -1	6 ft	1	EA
0-00-48011- <b>61988</b> -0	12 ft	1	EA
0-00-48011- <b>61989</b> -7	25 ft	1	EA
0-00-51115- <b>25782</b> -7	50 ft	1	EA

### 3M™ Cylinder Adhesive Applicator

Standard output for use with any 3M™ Cylinder Spray Adhesive products. Includes Cylinder Adhesive 9501 Spray Tip.



UPC	Case Qty	Units
0-00-48011- <b>61706</b> -0	1	EA

### 3M™ Cylinder Adhesive Applicator – Reduced Output


Recommended for dispensing 3M™ Hi-Strength Postforming Cylinder Spray Adhesive 94 CA and 3M™ Hi-Strength Cylinder Spray Adhesive 94 E.



UPC	Case Qty	Units
0-00-51115- <b>25039</b> -2	1	EA

### 3M™ Cylinder Adhesive Extended Applicator

Designed to spray the same as the Standard Output applicator, but with an 18 inch reach extension.

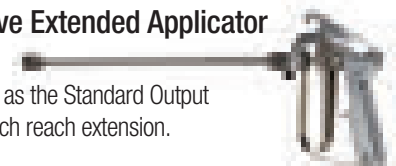

UPC	Case Qty	Units
0-00-51115- <b>25779</b> -7	1	EA

### 3M™ Cylinder Adhesive Hose Swivel

3M™ Cylinder Adhesive Hose Swivel is an optional accessory for cylinder spray adhesives.



UPC	Case Qty	Units
0-00-48011- <b>61992</b> -7	1	EA

## Cylinder Accessories (cont.)

### 3M™ Cylinder Adhesive T-Fitting

3M™ Cylinder Adhesive T-Fitting is an optional accessory for cylinder spray adhesives allowing two hoses to be used with a single cylinder.



UPC	Case Qty	Units
0-00-48011- <b>61987</b> -3	1	EA

### 3M™ Cylinder Adhesive Spray Tips

3M™ Spray Adhesive Accessories are designed for use with any 3M™ Cylinder Spray Adhesive product for your application needs.



UPC	Item	Description	Case Qty	Units
0-00-48011- <b>61990</b> -3	4001	Narrow spray width tip	1	EA
0-00-48011- <b>61991</b> -0	6501	Medium spray width tip	1	EA
0-00-48011- <b>61707</b> -7	9501	Wide spray width tip	1	EA
0-00-48011- <b>61993</b> -4	QSS	High output wide width spray pattern*	1	EA

\* To be used with 3M™ HoldFast 70 and 3M™ Polystyrene 78 HT Spray Adhesives.

## Aerosols

### 3M™ Pressure Sensitive Spray Adhesive 72

Permanently tack spray adhesive with long open time and easy repositioning of bonds. Provides strong bonds for adhering plastic, foam padding, carpet backing, polyethylene, polypropylene and many other materials to fiberglass, plastics, and particle board.



UPC	Size	Color	Case Qty	Units
0-00-21200- <b>30025</b> -7	Net Wt. 17.3 fl oz	Blue	12	CN

### 3M™ Heavy Duty 20 Spray Adhesive

A high strength, fast grabbing, industrial grade, lace spray aerosol adhesive.



UPC	Size	Color	Case Qty	Units
0-00-51111- <b>07861</b> -7	Net Wt. 13.8 fl oz	Clear	12	CN

### 3M™ Super 77™ Multipurpose Spray Adhesive

High tack, high coverage and fast drying for permanently attaching foils, carpeting, lightweight foams, paper, cardboard, felt and cloth to painted or unpainted metals, wood and hardboard. Bonds quickly in 15 seconds. Product is available in regular and low VOC version.



UPC	Size	Color	Case Qty	Units
0-00-21200- <b>21210</b> -9	Net Wt. 16.75 fl oz	Clear	12	CN
0-00-51111- <b>97956</b> -3	Net Wt. 18 fl oz (Low VOC)	Clear	12	CN

### 3M™ Foam Fast 74 Spray Adhesive

Extremely fast tacking industrial grade spray adhesive. Used for bonding flexible urethane or latex foam together and other materials such as wood, metal and plastics. Product is available in regular, inverted and low VOC version.



UPC	Size	Color	Case Qty	Units
0-00-21200- <b>50045</b> -9	Net Wt. 16.9 fl oz	Clear	12	CN
0-00-21200- <b>82242</b> -1	Net Wt. 16.9 fl oz	Orange	12	CN
0-00-51111- <b>07277</b> -6	Net Wt. 16.9 fl oz (Inverted)	Orange	12	CN
0-00-51111- <b>97967</b> -9	Net Wt. 19.0 fl oz (Low VOC)	Clear	12	CN
0-00-51111- <b>97958</b> -7	Net Wt. 19.0 fl oz (Low VOC)	Orange	12	CN

### 3M™ Multi-purpose Spray Adhesive 27

A versatile, economical, industrial grade, mist spray aerosol adhesive.



UPC	Size	Color	Case Qty	Units
0-00-51111- <b>07832</b> -7	Net Wt. 13.05 fl oz	Clear	12	CN

## Aerosols (cont.)

### 3M™ Hi-Tack 76 Spray Adhesive

Industrial aerosol spray adhesive with high tack for one surface bonding applications. Bonds many hard to bond materials such as polyethylene sheeting. Also bonds rubber, fabric, felt, foil, plastics, glass and other surfaces.



UPC	Size	Color	Case Qty	Units
0-00-21200- <b>30026</b> -4	Net Wt. 18.1 fl oz	Clear	12	CN

### 3M™ Polystyrene Insulation Spray Adhesive 78

High strength, high temperature resistant, industrial grade spray adhesive. Ideal for polystyrene panel bonding and roofing membrane attachment. Bonds polystyrene with no surface degradation. Product is available in regular and inverted can.



UPC	Size	Color	Case Qty	Units
0-00-21200- <b>41593</b> -7	Net Wt. 17.9 fl oz	Clear	12	CN
0-00-51111- <b>07279</b> -0	Net Wt. 17.9 fl oz (Inverted)	Clear	12	CN

### 3M™ Rubber and Vinyl 80 Spray Adhesive

Neoprene-based contact adhesive in aerosol form. It has exceptional resistance to plasticizing oils. Bonds rubber and supported vinyls.



UPC	Size	Color	Case Qty	Units
0-00-21200- <b>82618</b> -4	Net Wt. 19 fl oz	Yellow	6	CN

### 3M™ Hi-Strength 94 ET Spray Adhesive - Low VOC < 20%

High performance, industrial grade spray adhesive with a unique low telegraphing pebble spray pattern. Bonds many laminates, woods and particle board. Meets CARB.OTC VOC requirements; helps contribute to LEED® credits.



UPC	Size	Color	Case Qty	Units
0-00-51111- <b>97977</b> -8	Net Wt. 19.8 fl oz	Clear	12	CN

## Adhesives, Bulk

### 3M™ General Purpose 60 CA Adhesive

A low VOC general purpose industrial grade adhesive. This adhesive brings extraordinary value as it has exceptionally high solids and meets SCAQMD Rule 1168 Compliant Contact Adhesive. This adhesive is designed for temporary or permanent bonds on softer substrates like fabrics, foams, plastics, and heavy papers to wood, glass or steel. It is a proven adhesive technology for manufactured housing, RV and marine industries for ABS tubs and insulation bonding.



UPC	Size	Case Qty	Units
0-00-51115- <b>31589</b> -3	5 gallon	1	PA
0-00-51115- <b>31590</b> -9	54 gallon	1	DR

### 3M™ Foam Fast 74 Adhesive

Extremely fast tacking industrial grade spray adhesive. Used for bonding flexible urethane or latex foam together and other materials such as wood, metal and plastics.



UPC	Size	Case Qty	Units
0-00-51115- <b>25743</b> -8	52 gallon	1	DR

## 3M™ Hi-Strength 92 Adhesive

High performance, very high temperature resistant industrial grade spray adhesive. It features a fast tacking adhesive designed for high pressure laminations, particularly decorative laminate to particle board. It can also be used for veneers, fiberglass, headliners, foams, fabrics, glass, mirrors, cork, tile, rubber and steel.



UPC	Size	Color	Case Qty	Units
0-00-51115- <b>31591</b> -6	5 gallon	Clear	1	PA
0-00-51115- <b>31592</b> -3	54 gallon	Clear	1	DR

## 3M™ Hi-Strength Postforming 94 CA Adhesive

Low VOC, high performance, postformable industrial grade spray adhesive. Bonds to a variety of demanding substrates like decorative laminates, metal and some rubbers. Is SCAQMD Rule 1168 and helps contribute to LEED® credits. High solids for increased coverage.



UPC	Size	Color	Case Qty	Units
0-00-51115- <b>25016</b> -3	5 gallon	Clear	1	PA
0-00-48011- <b>61666</b> -7	5 gallon	Red	1	PA
0-00-51115- <b>25017</b> -0	55 gallon	Clear	1	DR
0-00-48011- <b>61667</b> -4	55 gallon	Red	1	DR

## 3M™ Hi-Strength 94 ET Adhesive

High performance, industrial grade spray adhesive. Creates high strength, postformable bonds to a variety of substrates like decorative laminates, metal and some rubbers. Is SCAMD Rule 1168 compliant and helps contribute to LEED® credits.



UPC	Size	Color	Case Qty	Units
0-00-51111- <b>97983</b> -9	5 gallon	Clear	1	PA
0-00-51111- <b>97984</b> -6	55 gallon	Clear	1	DR
0-00-51111- <b>97990</b> -7	5 gallon	Red	1	PA
0-00-51111- <b>97991</b> -4	55 gallon	Red	1	DR

## 3M™ Neoprene Contact Adhesive 5

A brushable, light yellow colored contact adhesive for bonding many decorative laminates, aluminum, steel, plywood, panels, wood and wood veneer, masonry, rubber, canvas and other porous and non-porous materials to each other or to themselves.



UPC	Size	Color	Case Qty	Units
0-00-21200- <b>20272</b> -8	1 quart	Light Yellow	12	EA
0-00-21200- <b>20276</b> -6	5 gallon pour spout	Light Yellow	1	PA

## 3M™ Fastbond™ Insulation Adhesive 49

Water-based, high solids, fast tacking pressure sensitive adhesive. Bonds lightweight materials like fiberglass insulation, felt, shoddy, paper and other materials to metal and many other surfaces. GreenGuard® Indoor Air Quality Certified.



UPC	Size	Color	Case Qty	Units
0-00-21200- <b>45163</b> -8	5 gallon	Clear	1	PA

## 3M™ Fastbond™ Contact Adhesive 30NF

A water-dispersed, high strength contact adhesive. Bonds most formed plastics, plastic laminate, wood, plywood, wood veneer and canvas to themselves and to each other.



UPC	Size	Color	Case Qty	Units
0-00-21200- <b>21187</b> -4	5 gallon	Green	1	PA
0-00-21200- <b>21182</b> -9	5 gallon	Neutral	1	PA
0-00-21200- <b>21188</b> -1	55 gallon	Green	1	DR
0-00-21200- <b>21183</b> -6	55 gallon	Neutral	1	DR

## Adhesives, Bulk (cont.)

### 3M™ Neoprene High Performance Contact Adhesive 1357

A high performance contact adhesive that provides a long bonding range and excellent initial strength. Can be used to bond most rubber, cloth, metal, wood, foamed glass, paper, honeycomb, decorative plastic laminates.



UPC	Size	Color	Case Qty	Units
0-00-21200- <b>19892</b> -2	1 quart	Gray-Olive	12	QT
0-00-21200- <b>22586</b> -4	1 gallon	Neutral	4	EA
0-00-21200- <b>19897</b> -7	5 gallon	Neutral	1	PA
0-00-21200- <b>19898</b> -4	55 gallon	Neutral	1	DR

### 3M™ Neoprene High Performance Rubber and Gasket Adhesive 1300

Yellow solvent type synthetic rubber based adhesive. High immediate strength and good heat resistance. Used for bonding most rubber and gasketing materials to most metal, baked enamel, wood, plastics and neoprene, SBR and butyl rubber.



UPC	Size	Color	Case Qty	Units
0-00-21200- <b>19868</b> -7	5 oz	Yellow	36	TB

## Adhesive Remover

### 3M™ Adhesive Remover

Citrus based industrial grade adhesive remover and cleaner. This product is prepackaged in convenient, portable, no maintenance aerosol cylinders and is ideal for cleaning and purging cylinder hoses and applicators. This product removes adhesives, labels, oils, greases from many substrates without leaving a residue.



UPC	Size	Color	Case Qty	Units
0-00-21200- <b>49048</b> -4	18.5 fl oz	Yellow	6	CN
0-00-51115- <b>25748</b> -3	Mini Cylinder 8.5 lbs	Yellow	1	EA

## Hot Melt Adhesives

### 3M™ Hot Melt Adhesive 3762AE


Economical adhesive for general purpose applications. It features an excellent "hot tack" fast-setting adhesive for production speed. Designed to be used with 3M™ Hot Melt Adhesive Applicator AE II to make up an advanced hand-held system that helps improve productivity, lower cost and minimize waste.



UPC	Size	Color	Case Qty	Units
0-00-21200- <b>82596</b> -5	0.45 in x 12 in	Tan	11	LB

### 3M™ Hot Melt Adhesive 3792AE

Long bonding range when dispensed at low melt temperature. Bond wood, P.O.P. displays, corrugated, furniture, upholstery, novelties and other lightweight materials.



UPC	Size	Color	Case Qty	Units
0-00-21200- <b>82583</b> -5	0.45 in x 12 in	Clear	11	LB

## Hot Melt Adhesives Accessories

### 3M™ Tapered Mixer Tip 04902

Applies a fine bead for use in bonding impact strips and sealing small seams as well as many other applications where a fine bead is required. Tip can be cut for desired bead thickness. Mix ratio: 1:1 or 2:1. 12 tips per bag.



UPC	Size	Case Qty	Units
0-00-51131- <b>04902</b> -4	12 oz	3	BG

### 3M™ Hot Melt Adhesive Applicator AE II

Combines the best features of a high volume industrial system into a compact, self-contained applicator. Dispenses 1/2" x 12" size Hot Melt Adhesive AE sticks. Includes stand.



UPC	Description	Case Qty	Units
0-00-21200- <b>96594</b> -4	Electric with a trigger switch	5	EA

### 3M™ Hot Melt Applicator AE II LT

Applicator for dispensing 1/2 in x 12 in size Hot Melt Adhesive AE LT sticks. High output, trigger operated, hot melt adhesive applicator for manual packaging and product assembly applications. Offers improved lightweight design and contoured grip for operator comfort and precise control.



UPC	Case Qty	Units
0-00-51115- <b>25567</b> -0	5	EA

## Cleaners & Lubricants

### 3M™ Citrus Base Cleaner

Removes grease, oil, ink, and most adhesives. It cleans without streaking and has a fresh citrus scent.



UPC	Size	Color	Case Qty	Units
0-00-21200- <b>76394</b> -6	Net Wt. 18.5 fl oz	Clear	12	CN

### 3M™ 5-Way Penetrant

A multi-purpose product that is effective for displacing moisture and dries out electrical apparatus.



UPC	Size	Case Qty	Units
0-00-21200- <b>21305</b> -2	Net Wt. 16.8 fl oz	12	CN

### 3M™ Silicone Spray Low VOC 60%

Silicone based release agent for industrial lubrication applications.



UPC	Size	Case Qty	Units
0-00-51111- <b>97974</b> -7	Net Wt. 13.4 fl oz	12	CN

### 3M™ Adhesive Remover Low VOC <20%

A petroleum based solvent that can be used to dissolve and remove dirt, grease, tar and many non-curing type adhesives.



UPC	Size	Case Qty	Units
0-00-51111- <b>97974</b> -7	Net Wt. 18.7 fl oz	12	CN

# Sealants

## 3M™ Polyurethane Construction Sealant 525

3M™ Polyurethane Construction Sealant 525 is an adhesive sealant which cures to form a flexible and resilient bond with very good adhesion on most materials.

ASTM C920 Compliant, Construction Specification: Section 07900 Joint Sealants.

- Excellent for concrete sealing
- Very pliable/flexible
- 90 plus minute skin time

UPC	Size	Color	Case Qty	Units
0-00-48011- <b>62823</b> -3	Net Wt. 10.5 fl oz	Gray	12	CQ



## Hybrid, Clear

### 3M™ Hybrid Adhesive Sealant 730

A clear cosmetic sealant with excellent UV resistance.



UPC	Size	Color	Case Qty	Units
0-00-51111- <b>08026</b> -9	305 mL	Clear	12	CQ
0-00-51111- <b>08027</b> -6	600 mL	Clear	20	PK

### 3M™ Crystal Clear Sealant 230

An excellent solvent based thermoplastic cosmetic sealer.



UPC	Size	Color	Case Qty	Units
0-00-51111- <b>08028</b> -3	310 mL	Clear	12	CQ
0-00-51111- <b>08029</b> -0	600 mL	Clear	20	PK

## Polyurethane

### 3M™ Polyurethane Multi-Purpose Adhesive Sealant 5010

A fast grabbing, translucent, 100% solids, one-part polyurethane-based moisture curing adhesive sealant. Excellent water resistance for outdoor usage. Not recommended for bonding metal.



UPC	Size	Color	Case Qty	Units
0-00-48011- <b>62822</b> -6	Net Wt. 10.5 fl oz	Clear	12	CQ

## Polyurethane (cont.)

### 3M™ Polyurethane Adhesive Sealant 540

A one-component, moisture curing product which forms permanently elastic bonds.



UPC	Size	Color	Case Qty	Units
0-00-21200- <b>41594</b> -4	10.5 fl oz	Gray	12	CART
0-00-21200- <b>49054</b> -5	10.5 fl oz	White	12	CART
0-00-51111- <b>97839</b> -9	10.5 fl oz	Bronze	12	CART
0-00-21200- <b>41595</b> -1	10.5 fl oz	Black	12	CART
0-00-51111- <b>97837</b> -5	10.5 fl oz	Tan	12	CART
0-00-21200- <b>96276</b> -9	400 mL	Black	12	PH
0-00-21200- <b>96277</b> -6	400 mL	Gray	12	PH
0-00-21200- <b>56562</b> -5	600 mL	Gray	12	PH

### 3M™ Polyurethane Adhesive Sealant Fast Cure 550

A fast curing polyurethane designed to cosmetically seal and bond in a variety of applications. It provides excellent adhesion to concrete, wood, aluminum, most lacquered metals, polyester, glass, and stone. Used extensively in the marine, and specialty vehicle markets, it performs both above and below the water line in marine applications.



UPC	Size	Color	Case Qty	Units
0-00-48011- <b>62801</b> -1	600 mL Sausage Pack	Gray	12	Pack
0-00-48011- <b>62791</b> -5	10.5 fl oz	White	12	CART
0-00-48011- <b>62799</b> -1	10.5 fl oz	Gray	12	CART
0-00-48011- <b>62795</b> -3	10.5 fl oz	Black	12	CART

### 3M™ Polyurethane Adhesive Sealant 560

3M™ Polyurethane Adhesive Sealants are one-component, moisture curing products which form permanently elastic bonds.



UPC	Size	Color	Case Qty	Units
0-00-21200- <b>49056</b> -9	10.5 fl oz	White	12	CQ
0-00-21200- <b>41597</b> -5	10.5 fl oz	Black	12	CQ
0-00-21200- <b>41596</b> -8	10.5 fl oz	Gray	12	CQ
0-00-21200- <b>96282</b> -0	400 mL	White	12	PH
0-00-21200- <b>96279</b> -0	400 mL	Black	12	PH
0-00-21200- <b>96281</b> -3	400 mL	Gray	12	PH

## Nitrile, Multi-Purpose

### 3M™ Nitrile Metal Sealant 2084

This metal sealant bonds and seals aluminum to glass, other metals and wood. Excellent resistance to water, oils and fuel. Ideal for bedding glass in aluminum window channels. Aluminum color. Seals after extended aging and meets requirements of AAMA Specification 801.1.



UPC	Size	Color	Case Qty	Units
0-00-21200- <b>20227</b> -8	5 oz	Aluminum	36	TB



## Concrete Repair

### 3M™ Concrete Repair DP600, Self-Leveling

Used as a horizontal grade repair material and adhesive for numerous substrates such as concrete, ceramic, wood, metal and glass. Apply using standard caulk applicator.



UPC	Size	Color	Case Qty	Units
0-00-21200- <b>56602</b> -8	Syringe 50 mL	Gray	12	EA
0-00-21200- <b>96596</b> -8	Cartridge/2 Mix Nozzles 8.4 oz	Gray	6	CQ

### 3M™ Concrete Repair DP600, Non-Sag

Used as a rapid setting two-component polyurethane for building and construction, maintenance and repair, pool maintenance and repair, and manufacturing and assembly.



UPC	Size	Color	Case Qty	Units
0-00-21200- <b>56606</b> -6	Syringe 50 mL	Gray	12	EA

### 3M™ EPX™ Plus II Applicator

Low-cost, portable, self contained dispensing applicator that simultaneously meters and mixes 2-part adhesives as it is being applied.



UPC	Size	Case Qty	Units
0-00-21200- <b>50004</b> -6	5.3 mm	10	EA

### 3M™ EPX™ Plus II Mixing Square Nozzle Gold

Features a unique design that allows the two parts of the adhesive to cascade through the nozzle with low pressure. Mix ratio: 1:1 or 2:1. 72 per box, 24 per bag, 12 per case.



UPC	Size	Case Qty	Units
0-00-21200- <b>50008</b> -4	5.3 mm	72	EA

## Paint Repair

### 3M™ Spackling Patch Plus Primer

Spackling compound and primer in one eliminates the need to prime before painting. Ready to paint in 30 minutes and firmly holds nails and screws. No shrinking or cracking. Provides great hiding power for professional results.



UPC	Size	Color	Case Qty	Units
0-00-51141- <b>95264</b> -2	8 fl oz	White	6	EA
0-00-51141- <b>95179</b> -9	16 fl oz	White	6	EA
0-00-51141- <b>95180</b> -5	32 fl oz	White	4	EA

## Wood Filler

### 3M™ Wood Filler

Makes the job fast and easy. Made with high quality, engineered fillers, which prevent shrinking and cracking, and high performance resins, which dry quickly. No solvents, no mixing required and non-flammable.



UPC	Size	Color	Case Qty	Units
0-00-51141- <b>95821</b> -7	8 fl oz	Stainable	12	EA
0-00-51141- <b>95822</b> -4	16 fl oz	Stainable	6	EA
0-00-51141- <b>95823</b> -1	32 fl oz	Stainable	6	EA
0-00-51141- <b>95820</b> -0	1.33 fl oz	Stainable	10	EA
0-00-51141- <b>36887</b> -0	4 fl oz	White	8	EA
0-00-51141- <b>95819</b> -4	4 fl oz	Natural	8	EA
0-00-51141- <b>95818</b> -7	4 fl oz	Golden Oak	8	EA
0-00-51141- <b>95816</b> -3	4 fl oz	Cherry	8	EA
0-00-51141- <b>95824</b> -8	4 fl oz	Walnut	8	EA
0-00-51141- <b>95817</b> -0	4 fl oz	Ebony	8	EA

# Tapes

## 3M™ Contractor Grade Multi-Use Duct Tape 2979

A waterproof polyethylene film over cloth scrim backing with a rubber adhesive used for a variety of duct tape applications. Economical choice. Offers easy tear and conformability. Individual roll wrap preserves integrity of the roll for less waste. Good moisture resistance and tensile strength.

- Economical choice
- Woven cloth scrim tears straight in both directions
- Good moisture resistance and tensile strength

UPC	Size	Grade	Color	Case Qty	Units
0-00-51115- <b>63738</b> -4	1.88 in x 60 yd	7.0 mil	Silver	24	RL
0-00-51115- <b>63739</b> -1	2.83 in x 60 yd	7.0 mil	Silver	12	RL



## 3M™ Contractor Grade Pro-Strength Duct Tape 3979

A waterproof polyethylene film over cloth scrim backing with a rubber adhesive used for demanding duct tape applications, such as masking against coatings. Offers easy tear and conformability. Individual roll wrap preserves integrity of the roll for less waste. Good moisture resistance and tensile strength.

- Good for hanging poly, bundling pipe, pulling wire, holding, protecting and other jobs
- Good conformability
- Tears cleanly both down and across the roll
- Good moisture resistance and tensile strength

UPC	Size	Grade	Color	Case Qty	Units
0-00-51115- <b>64070</b> -4	1.88 in x 60 yd	8.0 mil	Silver	24	RL



## Duct, General Purpose

### 3M™ Value Duct Tape 1900


Provides moisture resistance for tape applications. Synthetic rubber adhesive sticks well to many surfaces and tears easily by hand. Individual roll wrap for easy identification.



UPC	Size	Grade	Color	Case Qty	Units
0-00-51115- <b>23421</b> -7	1.88 in x 50 yd	5.8 mil	Silver	24	RL
0-00-51115- <b>23422</b> -4	2.83 in x 50 yd	5.8 mil	Silver	12	RL

### 3M™ General Use Duct Tape 2929

Resists moisture, prolonging the tape bond in moist or humid environments. A good choice for temporary repairs, sealing holding and marking.



UPC	Size	Color	Case Qty	Units
0-00-51115- <b>24883</b> -2	1.88 in x 50 yd	Silver	24	RL

## Duct, Multi-Purpose, Heavy Duty

### 3M™ Multi-Purpose Duct Tape 3900

A versatile tape for many applications, such as general maintenance, repair, holding poly carpet and other materials, secures PVC pipes, and protects surfaces from abrasion. Individually wrapped rolls help preserve the integrity of the roll for less waste.



UPC	Size	Color	Case Qty	Units
0-00-21200- <b>49833</b> -6	48 mm x 54.8 m	Black	24	RL
0-00-21200- <b>49832</b> -9	48 mm x 54.8 m	Blue	24	RL
0-00-21200- <b>49831</b> -2	48 mm x 54.8 m	Olive	24	RL
0-00-21200- <b>49830</b> -5	48 mm x 54.8 m	Red	24	RL
0-00-51131- <b>06976</b> -3	48 mm x 54.8 m	Silver	24	RL
0-00-21200- <b>49829</b> -9	48 mm x 54.8 m	White	24	RL
0-00-21200- <b>49828</b> -2	48 mm x 54.8 m	Yellow	24	RL

### 3M™ Heavy Duty Duct Tape 3939

Composed of a waterproof polyethylene film over cloth scrim backing with a rubber adhesive used for demanding duct tape applications. Offers easy tear and conformability. Individual roll wrap preserves integrity of the roll for less waste. The product number is printed in core to ensure the correct product is used. Good moisture resistance. Has good tensile strength.



UPC	Size	Color	Case Qty	Units
0-00-51131- <b>06975</b> -6	48 mm x 54.8 m	Silver	24	RL
0-00-21200- <b>85562</b> -7	72 mm x 54.8 m	Silver	12	RL

### 3M™ Extra Heavy Duty Duct Tape 6969

Extra thick, extra strong duct tape with a polyethylene coated cloth backing with rubber adhesive. Strong, tight hold. Sticks well to rough surfaces for demanding applications. Individually wrapped rolls help preserve the integrity of the roll for less waste.



UPC	Size	Color	Case Qty	Units
0-00-21200- <b>22773</b> -8	48 mm x 54.8 m	Black	24	RL
0-00-21200- <b>22780</b> -6	48 mm x 54.8 m	Olive	24	RL
0-00-51131- <b>06969</b> -5	48 mm x 54.8 m	Silver	24	RL
0-00-21200- <b>85635</b> -8	72 mm x 54.8 m	Silver	12	RL

## Duct, Performance Plus

### 3M™ Performance Plus Duct Tape 8979

Designed for both permanent and temporary applications both indoors and outdoors. Provides clean removal with little or no adhesive residue from most opaque surfaces up to 6 months after application. It offers sunlight UV resistance for up to one year without the backing deteriorating or delaminating. Typical physical and performance characteristics: Thickness, 13 mils; Adhesion to steel, 52 oz. in width; Tensile strength, 36 lbs. in width; Elongation at break, 21%; Temperature use range, Up to 200°F (93°C).



UPC	Size	Color	Case Qty	Units
0-00-48011- <b>53922</b> -5	24 mm x 54.8 m	Slate Blue	48	RL
0-00-48011- <b>53918</b> -8	48 mm x 54.8 m	Black	24	RL
0-00-48011- <b>53916</b> -4	48 mm x 54.8 m	Olive	24	RL
0-00-48011- <b>53851</b> -8	48 mm x 22.8 m	Slate Blue	12	RL
0-00-21200- <b>56468</b> -0	48 mm x 54.8 m	Slate Blue	24	RL
0-00-21200- <b>56469</b> -7	72 mm x 54.8 m	Slate Blue	12	RL
0-00-21200- <b>56470</b> -3	96 mm x 54.8 m	Slate Blue	12	RL
0-00-48011- <b>58183</b> -5	144 mm x 54.8 m	Slate Blue	6	RL
0-00-48011- <b>53920</b> -1	12 in x 60 yd	Slate Blue	2	RL
0-00-48011- <b>53919</b> -5	22 in x 60 yd	Slate Blue	1	RL

## Duct, Vinyl

### 3M™ Vinyl Duct Tape 3903

Embossed vinyl film coated with rubber adhesive effective for color-coding, labeling and other light duty applications where easy unwind, easy tear and less adhesive transfer are important. Clean removal up to 6 months



UPC	Size	Grade	Color	Case Qty	Units
0-00-51131- <b>06995</b> -4	2 in x 50 yd		Black	24	RL
0-00-51131- <b>06978</b> -7	2 in x 50 yd		Blue	24	RL
0-00-51131- <b>06984</b> -8	2 in x 50 yd		Gray	24	RL
0-00-51131- <b>06986</b> -2	2 in x 50 yd		Green	24	RL
0-00-51131- <b>06992</b> -3	2 in x 50 yd		Red	24	RL
0-00-51131- <b>06981</b> -7	2 in x 50 yd		White	24	RL
0-00-51131- <b>06982</b> -4	2 in x 50 yd		Yellow	24	RL
0-00-21200- <b>44989</b> -5	3 in x 50 yd		Gray	18	RL



**3M™ Value Masking Tape 101+**

The basic tape for basic jobs.

- Ideal for marking
- Temporary holding, wrapping and sealing



UPC	Size	Grade	Color	Case Qty	Units
0-00-51115-68710-5	48 mm x 55 m	5.1 mil	Tan	24	RL

**3M™ General Use Masking Tape 201+**

The tough tape for everyday jobs.

- Ideal for bundling, labeling and identifying




UPC	Size	Grade	Color	Case Qty	Units
0-00-51115-64742-0	48 mm x 55 m	4.4 mil	Tan	24	RL
0-00-51115-64748-2	48 mm x 55 m	4.4 mil	Tan	24*	RL

\*Individually wrapped.

## Masking, Performance

### 3M™ Performance Yellow Masking Tape 301+

The dependable choice for industrial performance. Ideal for industrial paint masking, bundling, holding, marking, color coding and sealing.




UPC	Size	Grade	Color	Case Qty	Units
0-00-51115- <b>64753</b> -6	48 mm x 55 m	6.3 mil	Yellow	24	RL
0-00-51115- <b>64758</b> -1	48 mm x 55 m	6.3 mil	Yellow	24*	RL

\*Individually wrapped

### 3M™ High Performance Green Masking Tape 401+


The industrial strength, green colored, high performance masking tape ideal for painting, including two-tone color application on trucks, buses, trailers, trains, fire trucks, ambulances and airplanes. Withstands surface temperatures up to 250°F (121°C) for 30 minutes.



UPC	Size	Grade	Color	Case Qty	Units
0-00-51115- <b>64763</b> -5	48 mm x 55 m	6.7 mil	Green	12	RL

### 3M™ Specialty High Temperature Masking Tape 501+

The highest degree of industrial performance, ideal for high temperature paint baking, fascia painting and pipe coating applications. Withstands surface temperatures up to 300°F (149°C) for 30 minutes.




UPC	Size	Grade	Color	Case Qty	Units
0-00-51115- <b>64776</b> -5	48 mm x 55 m	7.3 mil	Tan	24	RL

## Masking, Outdoor, Stucco

### 3M™ Outdoor Masking and Stucco Tape 5959

5959 is sunlight/UV resistant, removes clean with little or no adhesive residue for up to 3 months, and has 3 month outdoor weathering. It is designed for masking on windows and stucco applications. Protects a variety of substrates during construction.



UPC	Size	Color	Case Qty	Units
0-00-51115- <b>25491</b> -8	1.88 in x 45 yd	Red	12	RL

### 3M™ Venture Tape™ Stucco Mask Tape 1499

A strong, conformable, hand tearable polyethylene film coated with a high tack removable acrylic adhesive. Excellent resistance to UV, moisture, chemicals, oils, abrasions, and weathering. Used for masking windows, door frames and other building features during stucco application.



UPC	Size	Color	Case Qty	Units
0-00-51128- <b>95431</b> -7	48 mm x 55 m	Red	24	RL

# Masking, Painting

## Scotch-Blue™ Painter's Tape 2090

Scotch-Blue™ Painter's Tape Original Multi-Surface 2090 is the #1 selling painter's tape in the U.S. for a reason — it's the original blue tape that DIY painter's and pros have loved for more than 25 years. It delivers sharp paint lines and can be used on a variety of surfaces, such as walls, trim, glass and metal. It removes cleanly for up to 14 days and does not cause surface damage, even when exposed to direct sunlight.



UPC	Size	Color	Case Qty	Units
0-00-51115- <b>03680</b> -4	18 mm x 55 m	Blue	24	RL
0-00-51115- <b>09171</b> -1	24 mm x 55 m, Contractor Pack	Blue	4	PK
0-00-51115- <b>09221</b> -3	36 mm x 55 m, Contractor Pack	Blue	4	PK
0-00-51115- <b>03682</b> -8	36 mm x 55 m	Blue	12	RL
0-00-51115- <b>09168</b> -1	48 mm x 55 m, Contractor Pack	Blue	4	PK
0-00-51115- <b>03683</b> -5	48 mm x 55 m	Blue	12	RL



## Scotch-Blue™ Painter's Tape Advanced Delicate Surface 2080


Offers clean removal and no surface damage. Ideal for freshly painted surfaces (24 hours old) and other delicate substrates. Can be used on walls, trim and hardwood floors.



UPC	Size	Color	Case Qty	Units
0-00-51131- <b>79748</b> -2	24 mm x 55 m	Blue	24	RL
0-00-51131- <b>79749</b> -9	36 mm x 55 m	Blue	16	RL
0-00-51131- <b>79750</b> -5	48 mm x 55 m	Blue	12	RL

## Scotch-Blue™ Painter's Tape Advanced Multi-Surface 2093EL

Offers the ideal adhesion level for most surfaces, and comes off cleanly without leaving residue or causing surface damage. Can be used on most painted or lightly textured walls, finished and unfinished wood trim, metal hardware, glass, curved surfaces and more.

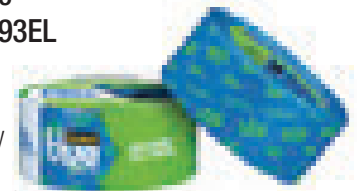

UPC	Size	Color	Case Qty	Units
0-00-51141- <b>32030</b> -4	24 mm x 55 m	Blue	24	RL
0-00-51141- <b>32032</b> -8	36 mm x 55 m	Blue	16	RL
0-00-51141- <b>32034</b> -2	48 mm x 55 m	Blue	12	RL

## Masking, Painting (cont.)

### Scotch-Blue™ Painter's Tape for Exterior Surfaces 2097

Designed for challenging weather conditions such as direct sun and high heat, wind, humidity and rain. Features a microgrid backing which provides exceptional paint anchorage; prevents flaking and makes it easy to get a straight tear every time.




UPC	Size	Color	Case Qty	Units
0-00-51141- <b>36200</b> -7	1.41 in x 45 yd	Blue	16	RL
0-00-51141- <b>36197</b> -0	1.88 in x 45 yd	Blue	12	RL

## Masking, Painting, Ultimate Edge

### Scotch® 60-Day Ultimate Paint Edge Masking Tape 2480S

A flatback tape featuring a unique acrylic adhesive technology. Produces long razor sharp straight lines. It resists UV/sunlight for 60 days and removes cleanly from most surfaces. Translucent backing aids in seeing when the tape has been properly rubbed down to give best paint lines.



UPC	Size	Color	Case Qty	Units
0-00-51111- <b>07545</b> -6	½ in x 60 yd	Green	72	RL
0-00-51111- <b>07546</b> -3	¾ in x 60 yd	Green	48	RL
0-00-51111- <b>07547</b> -0	1 in x 60 yd	Green	36	RL
0-00-51111- <b>91852</b> -4	1 in x 60 yd	Green	36	RL
0-00-51111- <b>07548</b> -7	1½ in x 60 yd	Green	24	RL
0-00-51111- <b>91853</b> -1	1½ in x 60 yd	Green	24	RL
0-00-51111- <b>07549</b> -4	2 in x 60 yd	Green	24	RL

## Masking, Outdoor

### 3M™ Outdoor Masking Poly Tape 5903

Offers clean removal from most opaque surfaces up to 30 days. UV resistant, conformable backing. Hand tearable.



UPC	Size	Grade	Color	Case Qty	Units
0-00-51115- <b>31842</b> -9	48 mm x 55 m	7.5 mil	Red	24	RL

## Masking, Pre-Taped Drop Cloth

### 3M™ Hand-Masker™ Pre-Taped Drop Cloth with General Purpose Masking Tape PT2020

A prefolded, high density plastic drop cloth pre-taped with General Purpose Masking Tape. The plastic unfolds out to 72".



UPC	Size	Case Qty	Units
0-00-51131- <b>80052</b> -6	72 in x 25 yd	8	RL

### 3M™ Hand-Masker™ Pre-Taped Plastic Drop Cloth PTD2090

Protects surfaces from paint, splatter or overspray. Comes pretaped with Scotch-Blue™ Painter's Tape 2090. Removes cleanly, even after 14 days.



UPC	Size	Case Qty	Units
0-00-51115- <b>07997</b> -9	24 in x 90 ft	12	RL
0-00-51131- <b>80058</b> -8	48 in x 90 ft	6	RL

## Masking, Contractor's Plastic

### 3M™ Hand-Masker™ Pre-folded Contractor's Plastic

Tough and durable plastic allows natural light through. Ideal for large single-coat applications like ceiling or wall texturing. It is also used for dust containment during projects like floor sanding and exterior wall finishing. Use with the Hand-Masker M3000 masking tool.



UPC	Size	Case Qty	Units
0-00-51131- <b>79683</b> -6	6 ft x 90 ft	12	RL
0-00-51131- <b>79684</b> -3	9 ft x 90 ft	12	RL
0-00-51131- <b>79778</b> -9	12 ft x 60 ft	12	RL

## Masking, Film

### 3M™ Hand-Masker™ Pre-Folded Masking Film Plus

Designed to resist paint flaking during multiple-coat applications. Paint overspray binds to the film, preventing it from flaking onto the first coat.




UPC	Size	Case Qty	Units
0-00-51131- <b>06850</b> -6	12 in x 180 ft	12	RL
0-00-51131- <b>06845</b> -2	24 in x 180 ft	12	RL
0-00-51131- <b>06860</b> -5	36 in x 90 ft	12	RL
0-00-51131- <b>06484</b> -3	48 in x 180 ft	12	RL
0-00-51131- <b>77406</b> -3	72 in x 90 ft	12	RL
0-00-51131- <b>77407</b> -0	99 in x 90 ft	12	RL
0-00-51131- <b>06861</b> -2	144 in x 60 ft	12	RL

## Masking, Accessories

### 3M™ Hand-Masker™ M3000 Dispenser

Dispenses pre-folded masking film/plastic (up to 144") or masking paper (up to 18") while applying Scotch-Blue™ Painter's Tape 2090 (3/4" to 2") to the film.



UPC	Case Qty	Units
0-00-51131- <b>77385</b> -1	4	EA

## 3M™ Hand-Masker™ Film Blades

Durable, sharp, stainless-steel blade with plastic blade guard.



UPC	Case Qty	Units
0-00-51131- <b>06802</b> -5	6	EA

## Seaming Tapes

### 3M™ All Weather Flashing Tape 8067

A self-adhesive barrier for use in the construction industry to seal window and door openings against moisture intrusion. Tape has a unique, aggressive acrylic adhesive and thin, proprietary backing.




UPC	Size	Color	Case Qty	Units
0-00-51115- <b>31620</b> -3	4 in x 75 ft	Tan	12	RL
0-00-51115- <b>31621</b> -0	6 in x 75 ft	Tan	8	RL



## House Wrap

### 3M™ Venture Tape™ HouseWrap Tape 1585CW-2

Polypropylene sheathing tape coated with an aggressive solvent based acrylic, pressure-sensitive adhesive. Designed for use as a closure system and vapor seal on all interior and exterior sheathing materials. Exceeds most building code requirements. For new construction as well as repair on all vapor barrier materials.



UPC	Color	Size	Case Qty	Units
0-07-50351- <b>19202</b> -1	Red	1.88 in x 55 yd	16	RL
0-00-51128- <b>95844</b> -5	White	1.88 in x 55 yd	16	RL

## Vinyl Tapes

### 3M™ Vinyl Tape 471

For masking, wrapping or sealing many curved or irregular surfaces. Excellent for many lane and safety marking applications. Ideal for color coding, abrasion protection, decoration and splicing applications. Meets requirements of CID-A-A-1689.



UPC	Size	Color	Case Qty	Units
0-00-21200- <b>04306</b> -2	2 in x 36 yd	Black	24	RL
0-00-21200- <b>04308</b> -6	2 in x 36 yd	Blue	24	RL
0-00-21200- <b>04309</b> -3	2 in x 36 yd	Brown	24	RL
0-00-21200- <b>04313</b> -0	2 in x 36 yd	Green	24	RL
0-00-21200- <b>04312</b> -3	2 in x 36 yd	Orange	24	RL
0-00-21200- <b>04305</b> -5	2 in x 36 yd	Red	24	RL
0-00-21200- <b>04311</b> -6	2 in x 36 yd	White	24	RL
0-00-21200- <b>04310</b> -9	2 in x 36 yd	Yellow	24	RL
0-00-21200- <b>04314</b> -7	2 in x 36 yd	Transparent	24	RL

## Flexible Duct Closure

### 3M™ Venture Tape™ Flexible Duct Closure Tape 1599B

Printed, UV resistant polypropylene film with a cold weather acrylic adhesive system. This adhesive performs well in either subzero cold or warm temperatures. Meets or exceeds all requirements of UL181B-FX related to closure systems for flexible air ducts and air connectors. 25/50 rated for Flame Spread and Smoke Development. UL Listed.



Applications: Sealing flexible air ducts, air connectors, for securing flex ducts to duct wrap facings, and for metal, and metal-to-metal connections. Adheres well to rubberized foam pipe insulation.

UPC	Size	Thickness	Color	Case Qty	Units
0-07-50351- <b>15996</b> -3	48 mm x 110 m	3 mil	Silver	24	RL
0-07-50351- <b>50017</b> -8	72 mm x 110 m	3 mil	Silver	16	RL

## Aluminum Foil

### 3M™ Venture Tape™ HVAC Aluminum Foil Tape 3520CW

A 2-mil, high strength aluminum foil with an aggressive, high temperature acrylic adhesive system. Provides an excellent vapor seal on fibrous and sheet metal ducts. Malleable foil conforms well around corners and to irregular surfaces. Special cold weather acrylic, pressure-sensitive adhesive system combines superior quick stick at normal temperatures with superior low temperature performance — the ultimate in cold weather tapes. Excellent at normal and elevated temperatures. UL Classified.



UPC	Size	Thickness	Color	Case Qty	Units
0-07-50351- <b>35202</b> -9	48 mm x 45.72 m	2 mil	Silver	24	RL
0-07-50351- <b>35207</b> -4	61.87 mm x 45.72 m	2 mil	Silver	20	RL
0-00-51115- <b>78311</b> -1	72 mm x 46 m	2 mil	Silver	16	RL

## FSK/Aluminum Foil Tapes

Tapes

### 3M™ Venture Tape™ FSK Facing Tape 1525CW

- Tri-directionally reinforced with a 2x3 fiberglass scrim, UL 723 Classified
- Recommended for use down to -40°F (-40°C) as well as normal and very high temperatures
- Excels in demanding temperature and humidity applications
- Vapor seal for reinforced fiberglass or mineral wool thermal insulation
- Coated with a special cold weather, acrylic, pressure sensitive adhesive system
- Combines superior quick stick at normal temperatures with superior low temperature performance



UPC	Size	Color	Case Qty	Units
0-07-50351-15253-7	72 mm x 45.72 m	Silver	16	RL
0-07-50351-50015-4	101.6 mm x 45.72 m	Silver	12	RL



### 3M™ Venture Tape™ Aluminum Foil Tape 1520CW

- A 1.75-mil, high strength aluminum foil coated with an aggressive, high temperature acrylic adhesive system
- Provides an excellent vapor seal on both fibrous and sheet metal ducts
- Conforms well around corners and to irregular surfaces
- Special cold weather acrylic pressure sensitive adhesive system combines superior quick stick at normal temperatures with superior low temperature performance. Excellent at elevated temperatures
- UL 723 Listed

UPC	Size	Color	Case Qty	Units
0-07-50351-15202-5	48 mm x 45.72 m	Silver	24	RL
0-07-50351-15203-2	72 mm x 45.72 m	Silver	16	RL
0-00-51128-95520-8	101.6 mm x 45.72 m	Silver	12	RL

### 3M™ Venture Tape™ Aluminum Foil Ductboard Tape 1581A


- A printed 2-mil heavy duty, high strength aluminum foil coated with a specially formulated pressure-sensitive acrylic adhesive system
- Superior adhesion and conformance. For use with fiberglass ductboard systems.
- Performance and materials guaranteed to meet or exceed UL181A-P quality standards; also meets the requirements of UL181B-FX, flexduct standard. UL Listed
- Primarily used for sealing fiberglass ductboard and flexduct. May also be used on metal connections, flexible duct, flexible duct connections to ductboard, and metal duct.

UPC	Size	Color	Case Qty	Units
0-07-50351-15817-1	2.5 in x 60 yd	Silver	20	RL
0-07-50351-15813-3	72 mm x 55 m	Silver	16	RL

## FSK, Foil

### 3M™ FSK Facing Tape 3320

A high performance reinforced insulation tape of Foil/Scrim/Kraft. UL Listed and mold resistant. FSK has a special acrylic adhesive which excels in very cold and hot temps. Use for a vapor barrier on fibrous duct board for sheet metal ducts.



UPC	Size	Thickness	Color	Case Qty	Units
0-00-51115- <b>31530</b> -5	48 mm x 45.7 m	6.7 mil	Silver	24	RL
0-00-51115- <b>31531</b> -2	72 mm x 45.7 m	6.7 mil	Silver	16	RL
0-00-51115- <b>31532</b> -9	99 mm x 45.7 m	6.7 mil	Silver	12	RL

### 3M™ Foil Tape 3340

Aluminum foil backing and a pressure sensitive acrylic adhesive and paper liner. UL181A-P /B-FX Listed.



UPC	Size	Thickness	Color	Case Qty	Units
0-00-51111- <b>07811</b> -2	2.5 in x 50 yd	4.0 mil	Silver	9	RL

### 3M™ Foil Tape 425

Self-wound, dead-soft aluminum foil tape with a pressure sensitive acrylic adhesive.



UPC	Size	Thickness	Color	Case Qty	Units
0-00-51138- <b>95072</b> -9	2 in x 60 yd	4.6 mil	Silver	24	RL
0-00-51138- <b>95073</b> -6	3 in x 60 yd	4.6 mil	Silver	12	RL

## Repair

### 3M™ Roof and Gutter Repair Tape 3382

A general purpose aluminum foil tape offering two outer layers of aluminum foil surrounding a polyester film core combined with an acrylic pressure-sensitive adhesive. Easy release, PE-coated kraft liner.



UPC	Size	Thickness	Color	Case Qty	Units
0-00-51111- <b>07818</b> -1	1.88 in x 10.9 yd	4.2 mil	Silver	12	RL

## Flexible Duct, Mastik Duct

### 3M™ Metallized Flexible Duct Tape 3350

A polypropylene tape for use with flexible ducts. UL 181 B-FX Listed. Metallized flexible duct tape.



UPC	Size	Thickness	Color	Case Qty	Units
0-00-51111- <b>07817</b> -4	48 mm x 109.6 m	3.1 mil	Silver	12	RL
0-00-51115- <b>69051</b> -8	12 in x 120 yd	3.1 mil	Silver	4	RL

### 3M™ Venture Tape™ Mastik Duct Sealing Tape 1580P

A printed, UL Listed 2-mil, annealed aluminum foil coated with a heavy mastik adhesive. 1580P meets UL181B-FX requirements, and excels in demanding temperature and humidity environments.



Provides superior performance and durability. Hand tearable and conformable.

Applications: Indoor/outdoor, instant water resistant bond on sheet metal, flex duct and duct wrap vapor barriers.

UPC	Size	Thickness	Color	Case Qty	Units
0-07-50351- <b>50023</b> -9	2 in x 100 ft	2 mil	Silver	24	RL
0-07-50351- <b>50011</b> -6	3 in x 100 ft	2 mil	Silver	16	RL

## Facing, Printed Line Set

### 3M™ Venture Tape™ ASJ Facing Tape 1540CW

White kraft/scrim/foil laminate (ASJ) coated with a cold-weather acrylic adhesive. Primarily used as a vapor seal on ASJ faced duct board and pipe insulation. Applies easily and excels in demanding temperature and humidity conditions. UL 723 Classified.



UPC	Size	Case Qty	Units
0-00-51128- <b>95659</b> -5	49.5 mm x 46 m	24	RL

## Facing, Printed Line Set (cont.)

### 3M™ Venture Tape™ Facing Tape 1537CW

This is the ultimate in cold weather tapes combining superior quick stick at normal temperatures with superior low temperature performance. Also performs well in humid and hot conditions.



UPC	Size	Color	Case Qty	Units
0-07-50351- <b>15373</b> -2	72 mm x 45.72 m	White	16	RL
0-00-51128- <b>95621</b> -2	72 mm x 45.72 m	Black	16	RL

### 3M™ Venture Tape™ Printed Line Set Tape 1507

A UV resistant polypropylene film with a solvent acrylic "CW" adhesive system. This adhesive performs well in both sub-zero cold or tropical temperatures. Designed to perform in direct sunlight. UL Listed.



Applications: Primarily used for taping line sets. Works well on foam pipe insulation used in line sets. 1507 is waterproof, weatherproof and designed for outdoor use.

UPC	Size	Color	Case Qty	Units
0-07-50351- <b>15071</b> -7	48 mm x 55 m	Black	24	RL
0-07-50351- <b>15072</b> -4	48 mm x 55 m	Silver	24	RL
0-07-50351- <b>10571</b> -7	48 mm x 55 m	Printed	24	RL

## Insulation Jacketing

### 3M™ VentureClad™ Insulation Jacketing System Tape 1577CW

Zero permeability, absolute vapor barrier for insulation cladding and jacketing applications. Highly specified product line. A multi-ply, self adhesive material that installs quickly and easily with no special tools required. Exceeds most building code requirements and can be used for new construction as well as repair on existing structures. Available in natural aluminum, black, and white. Highly puncture and tear resistant, flame retardant.



UPC	Size	Color	Case Qty	Units
0-00-51128- <b>95757</b> -8	35.5 in x 50 yd	Silver Embossed	1	RL
0-00-51128- <b>95781</b> -3	35.5 in x 50 yd	White Embossed	1	RL
0-00-51128- <b>95779</b> -0	35.5 in x 50 yd	Smooth Aluminum	1	RL
0-00-51128- <b>95767</b> -7	23 in x 50 yd	Smooth Aluminum	1	RL
0-00-51128- <b>95759</b> -2	23 in x 50 yd	Silver Embossed	1	RL

### 3M™ VentureClad™ Insulation Jacketing System Tape 1579CW

Zero permeability, absolute vapor barrier for insulation cladding and jacketing applications. Highly specified product line. A multi-ply, self adhesive material that installs quickly and easily with no special tools required. Exceeds most building code requirements and can be used for new construction as well as repair on existing structures. Available in natural aluminum and white. Highly puncture and tear resistant, flame retardant.




UPC	Size	Color	Case Qty	Units
0-00-51128- <b>95258</b> -0	46 in x 25 yd	Smooth Aluminum	1	RL
0-00-51128- <b>95259</b> -7	23 in x 25 yd	Smooth Aluminum	1	RL

## Cooler Repair, Wrap

### 3M™ Laminate Wrap 1555U

Formerly VentureWrap, this is primarily used as a low temperature vapor barrier in cryogenic applications on pipe insulation.



UPC	Size	Case Qty	Units
0-00-51128- <b>96517</b> -7	23.5 in x 250 yd	1	EA
0-00-51128- <b>96516</b> -0	35.5 in x 250 yd	1	EA

### 3M™ Venture Tape™ Duct Protection Wrap 1512

Protects ducts from dirt, dust, moisture, insects and contaminants. Also suitable for carpet and floor protection. Conformable, tough, puncture resistant. Removes clean; no residue after removal.



UPC	Size	Color	Case Qty	Units
0-07-05351- <b>50026</b> -0	24 in x 200 ft	Blue	1	RL
0-07-05351- <b>50025</b> -3	24 in x 200 ft	Clear	1	RL
0-07-05351- <b>50028</b> -4	36 in x 200 ft	Blue	1	RL
0-07-05351- <b>50027</b> -7	36 in x 200 ft	Clear	1	RL

### 3M™ Venture Tape™ Cooler Repair Tape 1577CW

A zero permeability, embossed multi-ply material with Venture CW cold weather acrylic adhesive. Easy and effective solution to air leakage for walk-in freezers and coolers. Applies quickly and easily with no special tools required. UL 723 Listed.




UPC	Size	Color	Case Qty	Units
0-07-05351- <b>50010</b> -9	4 in x 15 yd	White	12	RL
0-07-05351- <b>50009</b> -3	4 in x 15 yd	Silver	12	RL

## Foam Tape

### 3M™ VHB™ Tape 5952


Bonds high, medium and medium/low surface energy substrates. Provides handling convenience, cushioning, damping, and impact resistance.



UPC	Size	Thickness	Color	Case Qty	Units
0-00-21200- <b>56229</b> -7	1 in x 36 yd	45 mil	Black	9	RL

### 3M™ VHB™ Tape 4611

Bonds high surface energy substrates. This tape has excellent temperature resistance and can be used to bond metal parts prior to paint processing. Provides handling convenience, cushioning, damping, and impact resistance.



UPC	Size	Grade	Color	Case Qty	Units
0-00-21200- <b>56146</b> -7	1 in x 36 yd	45 mil	Gray	9	RL

### 3M™ Venture Tape™ Vinyl Foam Sealant Tape 1714 – ¼"

A specially formulated, pressure-sensitive adhesive system applied to a very flexible, closed cell vinyl foam. Vapor seal and cap joint in corrugated metal building panels and prefabricated wall panels. Thermal break tape.



UPC	Size	Case Qty	Units
0-00-51128- <b>96543</b> -6	1.5 in x 50 ft	8	RL
0-00-51128- <b>95941</b> -1	0.375 in x 50 ft	32	RL
0-00-51128- <b>95942</b> -8	2 in x 50 ft	6	RL
0-00-51128- <b>95943</b> -5	3 in x 50 ft	4	RL
0-00-51128- <b>95940</b> -4	0.75 in x 50 ft	16	RL

### 3M™ Venture Tape™ Vinyl Foam Sealant Tape 1718 – 1/8"

A specially formulated, pressure-sensitive adhesive system applied to a very flexible, closed cell vinyl foam.



UPC	Size	Color	Case Qty	Units
0-00-51128- <b>95946</b> -6	0.375 in x 75 ft	Gray	32	RL
0-00-51128- <b>95945</b> -9	0.5 in x 75 ft	Gray	24	RL
0-00-51128- <b>95947</b> -3	3 in x 75 ft	Gray	4	RL
0-00-51128- <b>95944</b> -2	4 in x 75 ft	Gray	3	RL

## Safety Stripe, Hazard Warning

### 3M™ Safety Stripe Tape 5702

Resists most common chemicals and solvents. Used to identify or mark traffic areas and physical hazards. The sharp, contrasting colors readily identify hazardous areas. The clear vinyl over the colored stripes helps protect stripes from abrasion. The 5.4-mil total tape thickness resists snagging often associated with thicker products.



UPC	Size	Color	Case Qty	Units
0-00-2120-00- <b>4585</b> -1	2 in x 36 yd	Black/Yellow	24	RL

### 3M™ Hazard Warning Tape 766 Black/Yellow

Used for marking of equipment pinch points or gears for warning purposes, temporary floor marking around equipment, or spills.




UPC	Size	Grade	Color	Case Qty	Units
0-00-21200- <b>43181</b> -4	2 in x 36 yd	5.0 mil	Black/Yellow	24	RL
0-00-21200- <b>43182</b> -1	3 in x 36 yd	5.0 mil	Black/Yellow	12	RL

## Box Sealing

### Tartan™ Box Sealing Tape 369


Provides a secure and durable closure.



UPC	Size	Color	Case Qty	Units
0-00-21200- <b>61553</b> -5	48 mm x 100 m	Clear	36	RL

### Scotch® Box Sealing Tape 371 Clear

Resists abrasion, moisture, chemicals, and scuffing. Offers a high edge tear and split resistance.



UPC	Size	Color	Case Qty	Units
0-00-51115- <b>68802</b> -7	48 mm x 50 m	Clear	6	PK

### Tartan™ Pistol Grip Box Sealing Tape Dispenser HB903

A portable, high impact, durable, hand-held unit that dispenses ½" to 2" for sealing boxes.



UPC	Size	Case Qty	Units
0-00-51131- <b>06994</b> -8	48 mm max width capacity	12	EA

## Corrugate

### Scotch® Recycled Corrugate Tape 3073 Clear

A 2.6 mil carton sealing tape that bonds instantly with recycled corrugated cartons. It is made with an adhesive that contains over 10% bio-based content.



UPC	Size	Color	Case Qty	Units
0-00-51111- <b>92900</b> -1	48 mm x 100 m	Clear	36	RL
0-00-51111- <b>92901</b> -8	72 mm x 100 m	Clear	24	RL
0-00-51115- <b>68767</b> -9	48 mm x 100 m, Individually Wrapped	Clear	36	RL
0-00-51115- <b>68766</b> -2	72 mm x 100 m, Individually Wrapped	Clear	24	RL

### Scotch® Recycled Corrugate Box Sealing Tape 3072 Clear

A 2.3 mil carton sealing tape that bonds instantly with recycled corrugated cartons. The strong conformable backing, combined with a high performance adhesive, holds the carton closed throughout the supply chain.



UPC	Size	Color	Case Qty	Units
0-00-51115- <b>64805</b> -2	48 mm x 100 m	Clear	36	RL
0-00-51115- <b>64807</b> -6	72 mm x 100 m	Clear	24	RL
0-00-51115- <b>71194</b> -7	48 mm x 100 m, Individually Wrapped	Clear	36	RL
0-00-51115- <b>71195</b> -4	72 mm x 100 m, Individually Wrapped	Clear	24	RL

### Scotch® Recycled Corrugate Box Sealing Tape 3071 Clear

A 2.1 mil carton sealing tape that bonds instantly with recycled corrugated cartons. The strong conformable backing, combined with a high performance adhesive, holds the carton closed throughout the supply chain.



UPC	Size	Color	Case Qty	Units
0-00-51115- <b>64569</b> -3	48 mm x 100 m	Clear	36	RL
0-00-51115- <b>64571</b> -6	72 mm x 100 m	Clear	24	RL

## Filament

### 3M™ Filament Tape 8934

Ideal for strapping, bundling and reinforcing applications.



UPC	Size	Case Qty	Units
0-00-21200- <b>86519</b> -0	18 mm x 55 m	48	RL

### Scotch® Filament Tape 897


Glass filament reinforced tape suitable for light to medium duty strapping, bundling and reinforcing applications. Has a synthetic rubber resin adhesive with good adhesion to most fiberboard surfaces and to a variety of plastic and metal surfaces.



UPC	Size	Color	Case Qty	Units
0-00-21200- <b>39510</b> -9	36 mm x 55 m	Clear	24	RL

### Scotch® Filament Tape 898

A high performance, transparent packaging tape reinforced along its length with continuous glass-yarn filaments, which give the tape very high tensile strength. The aggressive packaging adhesive is specifically formulated to provide balanced performance having both high adhesion and long term holding power.



UPC	Size	Color	Case Qty	Units
0-00-51131- <b>06894</b> -0	18 mm x 55 m	Clear	48	RL
0-00-21200- <b>74549</b> -2	24 mm x 55 m	Clear	36	RL
0-00-21200- <b>39871</b> -1	48 mm x 55 m	Clear	24	RL

### 3M™ Filament Tape 8934

Glass filament reinforced tape for light duty strapping, bundling and reinforcing. It has a synthetic rubber resin adhesive with good adhesion to most fiberboard surfaces, and a variety of plastics and metal surfaces.



UPC	Size	Color	Case Qty	Units
0-00-51115- <b>32143</b> -6	48 mm x 100 m	Clear	24	RL


# Fire Barrier

Flexible solutions for the protection of grease ducts, ventilation air ducts, return air plenums, emergency circuits, structural steel and more. These flexible wrap products make installation easy, even around corners. Ideal for use in a wide variety of commercial and industrial applications.

## 3M™ Fire Barrier Duct Wrap 615+

Lightweight, flexible, protective. The only fire-rated duct wrap product you will need to help protect grease and air ducts.

- Certified for grease ducts to ASTM E 2336 (including ASTM E 119 engulfment) in 2-layer systems. Certified for ventilation ducts to ISO 6944 in 1-layer systems and for other key life-safety duct applications
- Also used to achieve T-ratings for metallic penetrations
- Tested and listed with UL and Intertek (OPL), meets the intent of IBC, IMC, UMC, NFPA and other key life safety codes.
- Listed by California State Fire Marshal (Listing No. 2440-0941:5555)

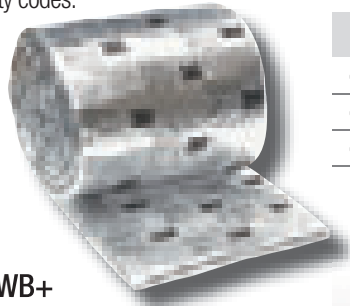

- ICC-ES Evaluation Report ESR-1255
- Lightweight (6 lbs per cu. ft.) and 1-½ in thin (in accordance with ASTM C 892 tolerances) for easier application
- Heat resistant up to 2 hours, 192°F
- Flexible for wrapping around corners and obstacles
- Non-asbestos wrap (made with non-biopersistent fibers, as defined by Nota Q of European commission Directive 97/69/EU)
- Available in 1 ½ in x 24 in x 25 ft. roll or 1 ½ in x 48 in x 25 ft. roll

UPC	Size	Case Qty	Units
0-00-51115- <b>54906</b> -9	48 in x 25 ft	1	RL
0-00-51115- <b>54905</b> -2	24 in x 25 ft	1	RL
0-00-51115- <b>18804</b> -6	6 in x 25 ft	4	RL

## 3M™ Fire Barrier Sealant CP25 WB+

A high-performance, latex-based intumescent firestop sealant. Dries to a red color, no mixing required.

- UP to 4-hour fire ratings per ASTM E 814 (UL1479)
- Superior adhesion – bonds to concrete, metals, wood, plastic and cable jacketing
- Extensive library of UL Classified fire protection systems
- Intumescent – expands when heated to seal around items exposed to fire
- Low VOC – meets the intent of LEED NC-EQ Credit 4.1 for Low-Emitting Materials – contains <250 g/L VOC content – Less h2O and exempt solvents

UPC	Size	Color	Case Qty	Units
0-00-51115- <b>11638</b> -4	Cartridge 10.1 fl oz	Red-Brown	12	CQ
0-00-51115- <b>11641</b> -4	Cartridge 27 fl oz	Red-Brown	6	CQ
0-00-51115- <b>11642</b> -1	Sausage Pack 20 fl oz	Red-Brown	10	EA
0-00-51115- <b>11639</b> -1	Pail 2 gallon	Red-Brown	1	PA
0-00-51115- <b>11640</b> -7	Pail 5 gallon	Red-Brown	1	PA





## Sealants

### 3M™ Fire Barrier Sealant FD 150+

Acrylic latex caulk with up to 4-hour fire ratings for joint systems per ATSM E 1966 (UL 2079) and 3-hour fire ratings for through penetrations per ASTM E 814 (UL 1479). Formulated without halogens.



UPC	Size	Color	Case Qty	Units
0-00-51115-18812-1	Cartridge 10.1 fl oz	Red	12	CQ
0-00-51115-18810-7	Sausage Pack 20 fl oz	Red	12	PK
0-00-51115-18811-4	Cartridge 28 fl oz	Red	6	CQ
0-00-51115-18813-8	Pail 4.5 gallon	Red	1	PA
0-00-51115-16564-1	Cartridge 10.1 fl oz	Limestone	12	TB
0-00-51115-11574-5	Cartridge 10.1 fl oz	Blue	12	TB
0-00-51115-16567-2	Sausage Pack 20 fl oz	Limestone	12	EA
0-00-51115-11634-6	Sausage Pack 20 fl oz	Blue	12	EA
0-00-51115-11602-5	Cartridge 28 fl oz	Blue	6	CQ
0-00-51115-16565-8	Pail 4.5 gallon	Limestone	1	PA
5-00-51115-11575-7	Pail 4.5 gallon	Blue	1	PA

### 3M™ Fire Barrier Sealant IC 15WB+

General purpose, intumescent firestop sealant with up to 3-hour fire ratings per ASTM E 814 (UL 1479). CPVC compatible and bonds to concrete, metals, wood, plastic and cable jacketing.



UPC	Size	Color	Case Qty	Units
0-00-51115-16557-3	Cartridge 10.1 fl oz	Yellow	12	CQ
0-00-51115-16560-3	Sausage Pack 20 fl oz	Yellow	10	EA
0-00-51115-16558-0	Pail 4.5 gallon	Yellow	1	PA

## Sealant, Silicone

### 3M™ Fire Barrier 2000+ Silicone Sealant

Bonds to most common construction materials to form a flexible firestop seal with up to 3-hour fire ratings per ASTM E 814 (UL 1479) and up to 4-hour fire ratings for joint systems per ASTM E 1966 (UL 2079).



UPC	Size	Case Qty	Units
0-00-51115-11558-5	Cartridge 10.3 fl oz	12	CQ
5-00-51115-11559-7	Pail 4.5 gallon	1	PA

## Sealant, Smoke and Sound

### 3M™ Smoke and Sound Sealant SS 100

Elastomeric sealant with a sag-resistant formula that dries to form a monolithic flexible seal that helps prevent unwanted noise infiltration and mitigates the spread of smoke and toxic gas during a fire.



- + 10% movement capability
- Effective draftstop
- Re-enterable/repairable
- Paintable
- Cleans up with water

UPC	Size	Color	Case Qty	Units
00-51115-54923-6	Sausage Pack 20 fl oz	White	12	EA

## Fire Block Sealant

### 3M™ Fire Block Sealant FB136

Lightweight, cementitious sealant with excellent adhesion. Bonds to concrete, metals, wood, plastic and cable jacketing. Heat resistant up to 2,000°F and is easily cleaned up with water. Will not sag or run in vertical or overhead applications.



UPC	Size	Color	Case Qty	Units
0-00-51115-16591-7	Cartridge 10.1 fl oz	Gray	12	CQ

## Fire Block Foam

### 3M™ Fire Block Foam FBFoam

Combines the high speed application properties of foam and the long lasting protection of caulk.

- Ready to use – no mixing required
- Expands to 200% in volume to quickly and effectively seal openings
- Heat resistant up to 240°F
- Tested to ASTM E 84 (modified) as a type V Residential Fireblock




UPC	Size	Color	Case Qty	Units
0-00-51115-54907-6	12 fl oz	Orange	12	CN

## Water Tight Sealants

### 3M™ Fire Barrier Water Tight 3000 WT Silicone Sealant

High performance, intumescent silicone achieves the benefits of a firestop and water tight seal.

- Up to 4-hour fire ratings per ASTM E 814 (UL 1479)
- Excellent weatherability – ideal for fast track construction
- Cures upon exposure to atmospheric humidity
- Fungal growth inhibited in the product per ASTM G 21




UPC	Size	Color	Case Qty	Units
0-00-51115- <b>18788</b> -9	Sausage Pack 20 fl oz	Gray	12	EA
5-00-51115- <b>16594</b> -3	Pail 4.5 gallon	Gray	1	PA

### 3M™ Fire Barrier Water Tight Silicone Sealant 1000 NS

Non-slumping silicone firestop for wall and floor applications.

- Up to 3-hour fire ratings for joint systems per ASTM E 1966 (UL 2079)
- Up to 3-hour fire ratings for through penetrations per ASTM E 814 (UL 1479)
- Compression/extension recovery of + 31% of original joint width



UPC	Size	Case Qty	Units
0-00-51115- <b>11535</b> -6	Cartridge 10.1 fl oz	12	CQ
0-00-51115- <b>18790</b> -2	Sausage Pack 20 fl oz	12	EA
0-00-51115- <b>11537</b> -5	Pail 4.5 gallon	1	PA

### 3M™ Fire Barrier Water Tight Silicone Sealant 1003 SL

Self-leveling silicone firestop for floor applications.

- Up to 3-hour fire ratings for joint systems per ASTM E 1966 (UL 2079)
- Up to 3-hour fire ratings for through penetrations per ASTM E 814 (UL 1479)
- Compression/extension recovery of + 31% of original joint width



UPC	Size	Case Qty	Units
0-00-51115- <b>11538</b> -7	Cartridge 10.1 fl oz	12	CQ
0-00-51115- <b>18789</b> -6	Sausage Pack 20 fl oz	12	EA
0-00-51115- <b>11540</b> -5	Pail 4.5 gallon	1	PA

## Packing Material

### 3M™ Fire Barrier Packing Material PM4

Lightweight packing material for use in up to 4-hour through-penetration firestops.

- Convenient, hand tear dispensing
- Approved for use in all of 3M™ UL Listed through-penetration firestop systems



UPC	Size	Case Qty	Units
0-00-51115- <b>18764</b> -3	4 in x 20.5 ft	5	RL

## Anchors

### 3M™ Ultra Fast Anchors 16”

16” anchors used to install PPDs in up to 12” concrete or 12” gypsum walls. Install an Ultra PPD in about one minute using Ultra Fast Anchors.



UPC	Size	Case Qty	Units
0-00-51115- <b>11530</b> -1	16 in	400	EA

## Plastic Pipe Device

### 3M™ Fire Barrier Ultra Plastic Pipe Device

Firestops penetrating items such as plastic pipe and cables and new and retrofit installations.

- Up to 3-hour fire ratings per ASTM E 814 (UL 1479)
- One piece construction makes installation easy
- Proven technology – intumescent action quickly seals around the penetrating item in a fire
- Can be used to seal ccPVC, PVC, FRPP, PVDF, ccABS and ABS plastic pipes



UPC	Size	Case Qty	Units
0-00-51115- <b>08378</b> -5	1.5 in	10	EA
0-00-51115- <b>08379</b> -2	2 in	10	EA
0-00-51115- <b>08380</b> -8	3 in	10	EA
0-00-51115- <b>08381</b> -5	4 in	10	EA
0-00-51115- <b>08253</b> -5	6 in	5	EA

# Cast-In Devices

## 3M™ Fire Barrier Cast-In Devices

Firestop devices used with metal, plastic, insulated pipes and cables.

- Up to 3-hour fire ratings per ASTM E 814 (UL 1479)
- Attach directly to wood forms or metal decking before concrete is poured, penetrating item is passed through device after the concrete cures.
- Easily adjustable bodies that can be adapted to concrete height from 2-½ in to 8 in (thicker pours accommodated with height adaptor)
- Non-metallic devices (white cap) are used for non-metallic pipe (including CPVC), and HVAC line sets



### Metal Pipes

UPC	Size	Case Qty	Units
0-00-51115- <b>16540</b> -5	2 in	12	EA
0-00-51115- <b>16541</b> -2	3 in	12	EA
0-00-51115- <b>16542</b> -9	4 in	6	EA
0-00-51115- <b>16543</b> -6	6 in	2	EA

### Plastic Pipes

UPC	Size	Case Qty	Units
0-00-51115- <b>16536</b> -8	2 in	12	EA
0-00-51115- <b>16537</b> -5	3 in	12	EA
0-00-51115- <b>16538</b> -2	4 in	6	EA
0-00-51115- <b>16539</b> -9	6 in	2	EA

## 3M™ Fire Barrier Cast-In Height Adaptor


One-piece, plastic body assembly allows 3M™ Fire Barrier Cast-in Devices to be used in up to 12 in. concrete thickness. Easily snaps into place, no additional fastening required.



UPC	Size	Case Qty	Units
0-00-51115- <b>16548</b> -1	2 in	12	EA
0-00-51115- <b>16549</b> -8	3 in	12	EA
0-00-51115- <b>16550</b> -4	4 in	12	EA
0-00-51115- <b>16551</b> -1	6 in	12	EA

## 3M™ Fire Barrier Cast-In Metal Deck Adaptor

Metal deck adaptor for a 2" cast-in device to be attached to a fluted metal deck.



UPC	Size	Case Qty	Units
0-00-51115- <b>16544</b> -3	2 in	12	EA
0-00-51115- <b>16545</b> -0	3 in	12	EA
0-00-51115- <b>16546</b> -7	4 in	12	EA
0-00-51115- <b>16547</b> -4	6 in	12	EA

## 3M™ Fire Barrier Cast-In Tub Box Assembly

Fastens to a 2 in. metallic 3M™ Fire Barrier Cast-In Device and creates a void for plumbing access. 2 in. or 3 in. foam insert depending on desired depth of access void, easily snaps into place and then attaches directly to wood forms.



UPC	Size	Case Qty	Units
5-00-51115- <b>16586</b> -8	3 in foam	6	EA

# Pass-Through

## 3M™ Re-enterable Cable Protection

- Up to 4-hour fire ratings per ASTM E 814 (UL 1479)
- UL Classified L-rating, Smoke Seal (when used in conjunction with 3M™ Fire Barrier Moldable Putty)
- Hinged for easy retrofit installation around cables
- Mounting brackets accessories available for wall or floor installations



UPC	Size	Case Qty	Units
0-00-51115- <b>18773</b> -5	2 in Round	6	EA
0-00-51115- <b>16598</b> -6	4 in Round	6	EA
0-00-51115- <b>16597</b> -9	4 in Square	6	EA

## Pass-Through (cont.)

### 3M™ Fire Barrier Pass-Through Mounting Brackets

Used in conjunction with 3M™ Fire Barrier Pass-Through Devices, these brackets provide additional support to the device. Simply secure the optional stud bracket to the pass-through assembly or use the sixplex mounting brackets to provide additional support when installing three devices stacked together.



UPC	Size	Case Qty	Units
0-00-51115- <b>18774</b> -2	2 in Mounting Bracket, Round Single Mount (Pair)	24	PR
0-00-51115- <b>18754</b> -4	4 in Mounting Bracket, Round Single Mount (Pair)	24	PR
0-00-51115- <b>18752</b> -0	4 in Mounting Bracket, Square Single Mount (Pair)	24	PR
0-00-51115- <b>18753</b> -7	4 in Mounting Bracket, Square Triple Mount (Pair)	24	PR
0-00-51115- <b>18777</b> -3	4 in Mounting Bracket, Square Sixplex Mount (Pair)	6	PR

### 3M™ Fire Barrier Pass-Through Foam Plugs

Replacement foam plugs for Fire Barrier Pass-Through Devices.



4 in. Square    4 in. Round    2 in. Round

UPC	Size	Case Qty	Units
0-00-51115- <b>18791</b> -9	4 in round	24	EA
0-00-51115- <b>18793</b> -3	2 in round	24	EA
0-00-51115- <b>18794</b> -0	4 in square	24	EA

## Restricting Collar

### 3M™ Fire Barrier Restricting Collar RC-1

Works in conjunction with 3M™ FS-195+ Wrap/Strip or 3M™ Interam™ Ultra GS. No waste; roll out and cut as much as you need. Required for firestopping plastic pipes larger than 4" in diameter.



UPC	Size	Case Qty	Units
0-00-54007- <b>08324</b> -5	2 in x 25 ft	1	EA

## Pillows

### 3M™ Fire Barrier Pillows

Self-contained, high intumescent firestop pillows are stackable and conformable for new and retrofit projects.



- Up to 3-hour fire ratings per ASTM E 814 (UL 1479)
- UL listed systems with openings up to 1,080 sq. in.
- No wire mesh or graphite
- Excellent aging properties

UPC	Size	Case Qty	Units
0-00-51115- <b>16530</b> -6	2 in x 4 in x 9 in	24	EA
0-00-51115- <b>16531</b> -3	2 in x 6 in x 9 in	16	EA
0-00-51115- <b>16532</b> -0	3 in x 6 in x 9 in	20	EA

### 3M™ Fire Barrier Self-Locking Pillows

Self-contained, highly intumescent pillows designed to firestop a wide variety of through penetrations including cable trays, conduit and blank openings. Interlocking strips hold pillows securely together yet release easily for retrofit or reuse just remove and reinstall pillows as needed.



- Up to 3-hour fire ratings per ASTM E 814 (UL 1479)
- UL listed systems with openings up to 1,080 sq. in.
- No wire mesh reduces safety issues

UPC	Size	Case Qty	Units
5-00-51115- <b>16578</b> -3	2 in x 4 in x 9 in	24	EA
5-00-51115- <b>16579</b> -0	2 in x 6 in x 9 in	16	EA
5-00-51115- <b>16580</b> -6	3 in x 6 in x 9 in	20	EA

3M™ Fire Barrier Pillows and Self-Locking Pillows meet the intent of LEED NC-EQ Credit 4.1 for Low-Emitting materials. Adhesives and sealants contain <250 g/L VOC content (less H2O and exempt solvents per SCAQMD Rule 1168).

## Mortar

### 3M™ Fire Barrier Mortar

Lightweight, endothermic firestop that is ready for mixing with potable water. Firestops penetrations passing through fire-rated floor or wall assemblies (not load bearing).



- Up to 3-hour fire ratings per ASTM E 814 (UL 1479)
- Variable mix ration permits self-leveling as well as trowelable application consistencies
- Acts as a heat sink, reducing the likelihood of combustible matter igniting on the unexposed side of the assembly

UPC	Size	Case Qty	Units
0-00-51115-54900-7	44 lb. Bag	1	BG
0-00-51115-54901-4	28 lb. Pail	1	PL

## Putty+Pads and Sticks, Sleeve Kit

### 3M™ Fire Barrier Moldable Putty MP+ Stix and Pads

Designed to firestop a wide variety of through penetrations, including cable, conduit, insulated pipe and metal pipe.



- Up to 3-hour fire ratings per ASTM E 814 (UL 1479)
- Provides cold smoke seal (L-rating)
- Pliable – can form into almost any desired shape
- Will not dry out or crumble – can be sealed for reuse

UPC	Size	Case Qty	Units
0-00-51115-16526-9	1.4 in x 11 in, Sticks	10	EA
0-00-51115-16508-5	4 in x 8 in, Pads	100	PD
0-00-51115-16509-2	7 in x 7 in, Pads	20	PD
0-00-51115-16510-8	9.5 in x 9.5 in, Pads	20	PD

## 3M™ Fire Barrier Putty Sleeve Kits

An affordable and re-enterable solution to meet firestop code for the installation of cable and blanks in both new or retrofit applications. Up to 4-hour fire ratings per ASTM E 814 (UL 1479) two-piece split/hinged design for easy retrofit installation on existing cables. Suitable for installation in gypsum wallboard and concrete walls or floors.



UPC	Size	Case Qty	Units
0-00-51115-18809-1	1 in	1	KT
0-00-51115-18808-4	2 in	1	KT
0-00-51115-18806-0	4 in	4	KT

## Wrap Strips

### 3M™ Fire Barrier FS-195+ Wrap Strip

One-part, intumescent strip; can be cut to fit irregular shapes. Re-enterable, no special tools required.



UPC	Size	Case Qty	Units
0-00-51115-07115-7	2 in x 24 in	10	EA

### 3M™ Interam™ Ultra GS Wrap Strip

Flexible, intumescent wrap strip expands when exposed to high temperatures. Up to 3-hour fire ratings per ASTM E 814 (UL 1479); excellent weatherability. For use in drain, waste, vent or closed pipe systems.



UPC	Size	Case Qty	Units
0-00-51115-16507-8	2 in x 40 ft	5	RL

## 3M™ Fire Barrier Tuck-In Wrap Strips and Rolls

Eliminates the need for retaining collars, concrete screws, ladders and other materials often required for bottom-side installations of plastic pipe. Up to 3-hour fire ratings per ASTM E 814 (UL 1479).




UPC	Size	Case Qty	Units
5-00-51115-18814-0	2 1/2 in x 8 1/4 in (3/16 in thick)	24	EA
5-00-51115-18815-7	2 1/2 in x 11 1/2 in (3/16 in thick)	24	EA
5-00-51115-18817-1	2 1/2 in x 14 7/8 in (3/16 in thick)	24	EA
5-00-51115-18821-3	2 1/2 in x 98.4 in (3/16 in thick)	6	EA

## Wrap/Mat

### 3M™ Fire Barrier Plenum Wrap 5A+


Lightweight wrap provides a flexible, non-combustible enclosure for cables and pipes in return air plenums. Strong, lightweight and flexible material for easy installation. Tested to ASTM 84, NFPA 262 (UL 910) and UL 1887, foil encapsulated scrim.



UPC	Size	Case Qty	Units
0-00-51115- <b>18802</b> -2	24 in x 50 ft (0.5 in thick)	1	RL
0-00-51115- <b>18805</b> -3	48 in x 25 ft (0.5 in thick)	2	RL

### 3M™ Interam™ Endothermic E 5A-4 Mat

Endothermic – releases chemically bound water to cool the assembly when exposed to high temperatures to protect structural steel, cable trays and circuits in conduits.

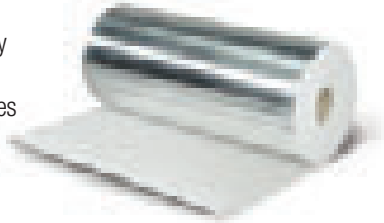

- Up to 4-hour protection for structural steel (ASTM E 119), up to 3-hour electrical circuit protection (ASTM E 1725) and up to 2-hour protection for wall opening membranes (UL 1479). See system details for layering requirements
- Outstanding performance in high-intensity fires, provides protection against large hydrocarbon pool fires in accordance with ASTM E 1529 (UL 1709)
- Made of a combination of organic/inorganic materials
- Available with a stainless steel or aluminum backing
- Easily cuts to size and flexible – install in new applications or directly over existing fire protection

UPC	Size	Case Qty	Units
0-00-51115- <b>54913</b> -7	24.5 in x 20 ft (.408 in thick)	1	RL

## Fire Dam Spray

### 3M™ FireDam™ Spray 200

Sprayable coating is a quick and easy method for firestopping fire rated construction joints, including head-of-wall, wall-to-wall, floor-to-floor and perimeter joints.




- Up to 4-hour fire ratings for joint systems per ASTM E 1966 (UL 2079)
- Up to 2-hour fire ratings for through penetrations per ASTM E 814 (UL 1479)
- Elastomeric – forms a flexible seal with compression/extension of up to + 50% of nominal joint width
- High coverage rate reduces installation time
- Fast-drying, low-sag formula
- Applied with conventional airless spray equipment
- Paintable when cured
- Easy clean up with water

UPC	Size	Color	Case Qty	Units
0-00-51115- <b>18797</b> -1	5 gallon pail	Gray	1	PA
0-00-51115- <b>18798</b> -8	5 gallon pail	Red	1	PA

## Composite Sheet

### 3M™ Fire Barrier Composite Sheet CS-195+

Ideal for firestopping blank openings and through penetrations of multiple cables, pipe ducts, bus ducts and cable trays.



- Up to 4-hour fire ratings per ASTM E 814 (UL 1479)
- No mixing or damming required
- Easy to install using common trade tools
- Easy to fasten, bolt punch or drill through (mounts easily with self-tapping screws or anchor bolts)
- Low VOC

UPC	Size	Case Qty	Units
0-00-51115- <b>07437</b> -0	16 in x 28 in, Boxed	1	EA
0-00-51115- <b>08260</b> -3	28 in x 52 in, Bulk	1	EA
0-00-51115- <b>07220</b> -8	36 in x 24 in, Boxed	1	EA
0-00-51115- <b>07222</b> -2	36 in x 36 in, Boxed	1	EA
0-00-51115- <b>07224</b> -6	36 in x 41 in, Boxed	1	EA

All sizes are .303 in. thick nominal.

## Disposable Respirators

### 3M™ Particulate Respirator 8210, N95

This classic disposable N95 particulate respirator is designed to help provide comfortable, reliable worker respiratory protection against certain non-oil based particles.

- Classic disposable N95 particulate respirator
- Welded strap attachment
- Cushioning nose foam
- Adjustable noseclip helps provide a custom fit and secure seal

UPC	Case Qty	Units
5-00-51138- <b>46457</b> -3	160	CA



### 3M™ Particulate Respirator 8511, N95

This disposable N95 particulate respirator features the proprietary 3M™ Cool Flow™ Valve and helps provide comfortable, reliable worker respiratory protection. It is ideally suited for hot/dusty work settings that require long periods of wear.

- 3M™ Cool Flow™ Valve
- Adjustable M nose clip
- Braided head bands and soft inner materials
- Spacious and durable
- Designed to increase comfort and wearability

UPC	Case Qty	Units
5-00-51138- <b>54343</b> -8	80	CA

### 3M™ Particulate Respirator 8200, N95


N95 respirator designed to help provide reliable protection against certain non-oil based particles. Low priced N95 that features Advanced Electret Media, adjustable noseclip and nose foam to help provide a custom fit and secure seal.



UPC	Case Qty	Units
00-51115- <b>54923</b> -6	160	CA

### 3M™ Particulate Respirator 9211+, N95

This disposable N95 particulate respirator featuring 3M™ Cool Flow™ valve helps provide comfortable, reliable worker respiratory protection against certain non-oil based particles. Ideally suited for hot/dusty work settings or long periods of wear.



UPC	Case Qty	Units
5-00-51131- <b>37193</b> -9	120	CA

### 3M™ Particulate Respirator 8210V

Designed to help provide quality, reliable worker respiratory protection.



UPC	Case Qty	Units
5-00-51131- <b>49711</b> -0	80	EA

# Reusable Respirators

## Cartridge

### 3M™ Rugged Comfort Quick Latch Half Facepiece Reusable Respirator 6500 Series

This facepiece combines comfort, durability and stability. The proprietary quick latch design offers an easy, one-hand touch drop-down mechanism for putting the facepiece on and off while moving in and out of contaminated areas.

- Resilient silicone face seal provides comfort, durability, and stability with a soft but firm seal
- Quick latch mechanism makes it easy to drop down the respirator from face without removing head straps
- Proprietary 3M™ Cool Flow™ Valve helps reduce heat and moisture to make breathing easier
- Low profile, half facepiece design offers a wide field of view and compatibility with welding and grinding shields
- Exhalation valve cover directs exhaled breath and moisture downward to reduce fogging of face shields



UPC	Size	Case Qty	Units
5-00-51131- <b>49488</b> -1	Small	10	EA
5-00-51131- <b>49490</b> -4	Medium	10	EA
5-00-51131- <b>49492</b> -8	Large	10	EA



### 3M™ Organic Vapor Cartridge 6001

NIOSH approved against certain organic vapors. Use with 3M™ Half and Full Facepieces 6000, 7000 and FF-400 Series with bayonet filter holders.

- Organic vapor cartridge
- Swept-back design for enhanced field of view and balance
- Use with 3M™ Reusable Respirators

UPC	Case Qty	Units
5-00-51138- <b>21674</b> -5	60	CA





# Reusable Respirators, Cartridges and Filters



The following particulate filters can be used with 3M™ Respirators 5000 Series or 3M™ Cartridge 6000 Series with 3M™ Adapter 502, or 3M™ Half and Full Facepieces 6000, 7000 and FF-400 Series with bayonet filter holders.

When properly fitted, use in a variety of applications including welding, brazing, torch cutting, metal pouring, soldering, and exposure to lead, asbestos, cadmium, arsenic, and MDA for concentrations up to 10 times the Permissible Exposure Limit (PEL) with half facepieces or 50 times PEL with full facepieces. Full facepieces must be quantitatively fit tested to claim assigned protection factor above 10 in negative pressure mode.

## 3M™ Particulate Filter with Nuisance Level Organic Vapor Relief 2097, P100

Offers nuisance level relief from organic vapors that are below the PEL. Nuisance level refers to concentrations not exceeding OSHA PEL or other applicable government occupational exposure limits, whichever is lower. Not NIOSH certified for use against ozone. Do not use for respiratory protection against organic vapors or in environments that are immediately dangerous to life or health (IDLH).

UPC	Case Qty	Units
5-00-51131- <b>07184</b> -6	100	CA



## 3M™ Particulate Filter 2091, P100

NIOSH approved for environments containing certain oil and non-oil based particles. Do not use in environments that are immediately dangerous to life or health (IDLH).

UPC	Case Qty	Units
5-00-51131- <b>07000</b> -9	100	CA



## 3M™ Organic Vapor Cartridge/Filter 60921, P100

NIOSH approved against certain organic vapors and particulates. Use with 3M™ Half and Full Facepieces 6000 Series and 3M™ Half and Full Facepieces 7000 Series with bayonet style cartridge holders.

UPC	Case Qty	Units
5-00-51138- <b>46465</b> -8	60	CA



## 3M™ Multi-Gas/Vapor Cartridge/Filter 60926, P100

NIOSH approved against certain organic vapors, acid gases, ammonia, methylamine, formaldehyde\* and particulates. Use with 3M™ Half and Full Facepieces 6000 Series and 3M™ Half and Full Facepieces 7000 Series with bayonet style cartridge holders.

UPC	Case Qty	Units
5-00-51138- <b>54187</b> -8	60	CA



## 3M™ Organic Vapor/Acid Gas Cartridge/Filter 60923, P100

NIOSH approved against certain organic vapors, acid gases and particulates. Use with 3M™ Half and Full Facepieces 6000 Series and 3M™ Half and Full Facepieces 7000 Series with bayonet style cartridge holders.


UPC	Case Qty	Units
5-00-51138- <b>46467</b> -2	60	CA



## 3M™ Multi-Gas/Vapor Cartridge 6006

NIOSH approved against certain organic vapors, acid gases, ammonia, methylamine or formaldehyde\*. Use with 3M™ Half and Full Facepieces 6000 Series and 3M™ Half and Full Facepieces 7000 Series with bayonet style cartridge holders.

UPC	Case Qty	Units
5-00-51138- <b>54186</b> -1	60	CA




\*OSHA regulations require gas proof goggles be worn with half facepiece respirators when used against formaldehyde.

## Reusable Respirators Cartridges and Filters (cont.)

### 3M™ Organic Vapor/Acid Gas Cartridge 6003

NIOSH approved against certain organic vapors or acid gases. Use with 3M™ Half and Full Facepieces 6000 Series and 3M™ Half and Full Facepieces 7000 Series with bayonet style cartridge holders.



UPC	Case Qty	Units
5-00-51131- <b>07047</b> -4	60	CA

### 3M™ Particulate Filter 5N11, N95

NIOSH approved for environments containing certain non-oil based particles. Use with 3M™ Respirators 5000 Series or 3M™ Cartridges 6000 Series, and 3M™ Filter Retainer 501.



UPC	Case Qty	Units
5-00-51138- <b>46464</b> -1	100	CA

### 3M™ Respirator Filter 5P71, P95


NIOSH approved for environments containing certain oil and non-oil based particles. Use with 3M™ Respirators 5000 Series or 3M™ Cartridges 6000 Series, and 3M™ Filter Retainer 501.



UPC	Case Qty	Units
5-00-51131- <b>07194</b> -5	100	CA

### 3M™ Particulate Filter 7093

NIOSH approved for environments containing certain oil and non-oil based particles. Use with 3M™ Respirators 5000 Series or 3M™ Cartridges 6000 Series with 3M™ Adapter 502, 3M™ Facepieces 6000 Series, 3M™ Facepieces 7000 Series, or 3M™ FF-400 Series respirators.



UPC	Case Qty	Units
5-00-51131- <b>52705</b> -3	60	CA
5-00-51131- <b>52706</b> -0	144	CA

## Reusable Respirator Retainer

### 3M™ Retainer 501

Used to hold 3M™ Particulate Filters 5N11 and 5P71/07194(AAD) in place on top of 3M™ Respirators 5000 Series and 3M™ Cartridges 6000 Series.




UPC	Case Qty	Units
5-00-51138- <b>17668</b> -1	100	CA

## Reusable Respirator, Assembly

### 3M™ Half Facepiece Disposable Respirator Assembly 52P71, Organic Vapor/P95 Respiratory Protection

NIOSH approved against certain organic vapors and particulates. Use for a variety of applications including spray painting, pesticides, agriculture, construction and transportation.




UPC	Size	Case Qty	Units
5-00-51138- <b>66068</b> -5	Small	12	CA
5-00-51138- <b>66069</b> -2	Medium	12	CA
5-00-51138- <b>66070</b> -8	Large	12	CA

## Respirators, Half Facepiece

### 3M™ Half Facepiece 6000 Series

Use with 3M™ Filters 2000 Series, 3M™ Filter 7093, 7093C, 3M™ Cartridges 6000 Series, or 3M™ Dual Airline Systems against a variety of gases, vapors and particulate hazards according to NIOSH approvals.



UPC	Size	Case Qty	Units
5-00-51131- <b>07024</b> -5	Small	24	CA
5-00-51131- <b>07025</b> -2	Medium	24	CA
5-00-51131- <b>07026</b> -9	Large	24	CA

## Respirators, Half Facepiece (cont.)

### 3M™ Half Facepiece 7500 Series,

This half facepiece was designed with the wearer in mind. Its soft sealing surface, along with a uniquely designed, 3M™ Cool Flow™ Exhalation Valve, enhances wearer comfort and face fit.



UPC	Size	Case Qty	Units
5-00-51131- <b>37081</b> -9	Small	10	CA
5-00-51131- <b>37082</b> -6	Medium	10	CA
5-00-51131- <b>37083</b> -3	Large	10	CA

## Respirators, Full Facepiece

### 3M™ Full Facepiece 6000 Series

Use with 3M™ Filters 2000 Series, 3M™ Filter 7093, 7093C, 3M™ Cartridges 6000 Series, or 3M™ Dual Airline Systems against a variety of gases, vapors and particulate hazards according to NIOSH approvals.



UPC	Size	Case Qty	Units
5-00-51138- <b>54145</b> -8	Small	4	EA
5-00-51138- <b>54146</b> -5	Medium	4	EA
5-00-51138- <b>54159</b> -5	Large	4	EA

### 3M™ Ultimate FX Full Facepiece Reusable Respirator

Engineered to deliver maximum comfort with a wide field of view. Features a soft, silicone nose cup and a large lens that allows for superior peripheral vision. The only respirator with 3M's unique Scotchgard™ Protector, which helps the lens resist dirt and some paint and stains, and makes it easier to clean. The 3M™ Cool Flow™ Valve helps reduce heat and moisture buildup inside the facepiece.



UPC	Size	Case Qty	Units
5-00-51135- <b>89418</b> -2	Small	4	EA
5-00-51135- <b>89421</b> -2	Medium	4	EA
5-00-51135- <b>89424</b> -3	Large	4	EA

## PAPR Paint Spray Kit

### 3M™ Belt-Mounted PAPR Painters Kit GVP-PSK2

Complete, ready to use OV/HE PAPR system. Ideal as a painter's respirator kit or for use in any application that requires mobility and respiratory protection against organic vapors.



UPC	Case Qty	Units
0-00-51331- <b>37335</b> -8	1	CA

## Respirator, Hard Hat Combination

### 3M™ Adflo™ Powered Air Purifying Respirator High Efficiency System with 3M™ Speedglas™ Welding Helmet 9100 MP, 37-1101-30SW, Lithium Ion Battery, Hard Hat, Side Windows and Auto-Darkening filter 9100XX, Shades 5, 8-13




High efficiency particulate respiratory protection system for welders. The 3M™ Speedglas™ Welding Helmet 9100MP can provide overhead protection, increased peripheral vision and excellent optical quality and function.

UPC	Case Qty	Units
0-00-51141- <b>56166</b> -0	1	EA

## Respirators, Air Purifying

### 3M™ Powerflow™ Face-Mounted Powered Air Purifying Respirators

A lightweight, face-mounted Powered Air Purifying Respirator (PAPR). High efficiency filter for protection against dusts, mists, fumes and radionuclides. Ideal for lead, asbestos and other hazardous particulates. The Powerflow system with the BP17IS battery has been tested and classified for intrinsic safety by UL for use in the following Division I locations: Class I, Group D; Class II, Groups E, F, G; and Class III. Temperature Code "T3".



UPC	Size	Case Qty	Units
0-00-51138- <b>76712</b> -9	Medium	1	CA
0-00-51138- <b>76714</b> -3	Large	1	CA



## Protective Eyewear

### 3M™ SecureFit™ Protective Eyewear, 400 Series

Stylish design weighs less than 1oz, has a soft adjustable nosepiece to help reduce slippage, incorporates dual-material on temples to provide cushioned comfort plus enhanced style, and features the proprietary 3M™ Pressure Diffusion Temple Technology.

UPC	Color	Case Qty	Units
1-00-78371- <b>66211</b> -7	SF401AF, Clear	20	EA
1-00-78371- <b>66212</b> -4	SF402AF, Gray	20	EA



## Eyewear, Reader

### 3M™ BX™ Dual Reader Protective Eyewear

Features magnifying power on both the upper and lower lens to help make reading and other close work easier. Features magnifying diopters, lightweight lenses with adjustable soft tip temples, and integrated sideshields.



UPC	Size	Color	Case Qty	Units
1-00-78371- <b>62046</b> -9	+1.5	Silver/Black	20	EA
1-00-78371- <b>62047</b> -6	+2.0	Silver/Black	20	EA
1-00-78371- <b>62048</b> -3	+2.5	Silver/Black	20	EA

## Eyewear, SecureFit™

### 3M™ SecureFit™ Protective Eyewear, 200 Series

Stylish, lightweight design weighs less than 1oz. Features proprietary 3M™ Pressure Diffusion Temple Technology that helps diffuse pressure over the ear to enhance frame comfort while not compromising the security of fit across a diverse workforce.



UPC	Color	Case Qty	Units
1-00-78371- <b>65717</b> -5	SF201AF, Clear	20	EA
1-00-78371- <b>65718</b> -2	SF202AF, Gray	20	EA
1-00-78371- <b>65719</b> -9	SF203AF, Amber	20	EA

## Eyewear, Virtua™

### 3M™ Virtua™ CCS Protective Eyewear with Foam Gasket

Comfortable, lightweight frame features the Cord Control System (CCS) with optional foam gasket attachment. Meets the requirements of CSA Z94.3-07 and is Impact Rated to ANSI Z87.1-2010.



UPC	Color	Case Qty	Units
1-00-78371- <b>11872</b> -0	11872-00000-20 Clear	20	EA
1-00-78371- <b>11873</b> -7	11873-00000-20 Gray	20	EA
1-00-78371- <b>11874</b> -4	11874-00000-20 I/O Mir	20	EA

### 3M™ Virtua™ AP Protective Eyewear

Offers sleek, unisex styling, lightweight comfort and exceptional value. It is designed with high-wrap polycarbonate lenses and integral sideshields to provide comfortable fit and ultimate protection.



UPC	Color	Case Qty	Units
1-00-78371- <b>11818</b> -8	Clear	20	EA

## Eyewear, Photochromatic, Sunwear —

### 3M™ Smart Lens Photochromatic Eyewear

Featuring abrasion-resistant polycarbonate lenses and a soft adjustable nose bridge, nylon brow and magnesium alloy spring-hinged temple for a flexible fit. The lenses transition from light to dark in less than 20 seconds (allows in just 22% light transmission) and dark to light in 3 minutes (allowing 77.5% light transmission).



UPC	Case Qty	Units
1-00-78371- <b>62033</b> -9	5	EA

## 3M™ Safety Sunwear

Features a wraparound aluminum frame, an adjustable nosebridge, spring-hinge temples and impact-resistant polycarbonate lenses.



UPC	Color	Case Qty	Units
1-00-78371- <b>65888</b> -2	SS1302AF-G Gray Frame, Gray Lens	10	EA
1-00-78371- <b>65889</b> -9	SS1329AS-G Gray Frame, Red Mirror Lens	10	EA
1-00-78371- <b>65890</b> -5	SS1330AS-G Gray Frame, Yellow Mirror Lens	10	EA
1-00-78371- <b>65891</b> -2	SS1428AS-S Silver Frame, Blue Mirror Lens	10	EA
1-00-78371- <b>65895</b> -0	SS1502AF-B Black Frame, Gray Lens	10	EA
1-00-78371- <b>65892</b> -9	SS1502AF-W White Frame, Gray Lens	10	EA
1-00-78371- <b>65894</b> -3	SS1511AF-B Black Frame, Gray Polarized Lens	10	EA
1-00-78371- <b>65896</b> -7	SS1514AS-B Black/Green Frame, Silver Mirror Lens	10	EA
1-00-78371- <b>65893</b> -6	SS1514AS-S Silver/Black Frame, Silver Mirror Lens	10	EA
1-00-78371- <b>65897</b> -4	SS1629AS-B Black Frame, Red Mirror Lens	10	EA

## Eyewear, Moon Dawg™

### 3M™ Moon Dawg™ Protective Eyewear

Surf-inspired Moon Dawg safety glasses are your comfortable, stylish choice for protective eyewear. Its lightweight, wide temple frame offers enhanced coverage, and its durable construction makes it a cool outdoor safety sunwear option.



UPC	Color	Case Qty	Units
1-00-78371- <b>62178</b> -7	Black Frame, Gray Lens	20	EA

## Eyewear, Hard Hat Protective

### 3M™ HIE6 Protective Hard Hat Eyewear

This integrated lightweight retractable eyewear is easy to attach to the headband of 3M hard hats, nearly eliminating the weight of the eyewear on the nose and temples.



UPC	Color	Case Qty	Units
1-00-78371- <b>66743</b> -3	HIE601AF, Clear, anti-fog lens	20	EA
1-00-78371- <b>66744</b> -0	HIE602AF, Amber, anti-fog lens	20	EA
1-00-78371- <b>66745</b> -2	HIE603AF, Gray, anti-fog lens	20	EA

## Head Protection, Hard Hats


### 3M™ Hard Hat, 700 Series

Suspension sits lower on head to reduce pressure and increase security. Smooth, easy turning ratchet suspension. Optimized comfort with three levels of adjustment. Custom imprinting available.

UPC	Color	Case Qty	Units
1-00-78371- <b>64197</b> -6	White	20	EA
1-00-78371- <b>64198</b> -3	Yellow	20	EA
1-00-78371- <b>64199</b> -0	Blue	20	EA
1-00-78371- <b>64200</b> -3	Green	20	EA
1-00-78371- <b>64201</b> -0	Red	20	EA
1-00-78371- <b>64202</b> -7	Orange	20	EA
1-00-78371- <b>64203</b> -4	Bright Orange	20	EA
1-00-78371- <b>64204</b> -1	Gray	20	EA
1-00-78371- <b>64205</b> -8	Bright Yellow	20	EA
1-00-78371- <b>64206</b> -5	Navy Blue	20	EA

### 3M™ Full Brim Hard Hat, 800 Series

Suspension sits lower on head to reduce pressure and increase security. Smooth, easy turning ratchet suspension. Optimized comfort with three levels of adjustment. Custom imprinting available.



UPC	Color	Case Qty	Units
1-00-78371- <b>65775</b> -5	White	20	EA
1-00-78371- <b>65776</b> -2	Yellow	20	EA
1-00-78371- <b>65777</b> -9	Blue	20	EA
1-00-78371- <b>65778</b> -6	Green	20	EA
1-00-78371- <b>65779</b> -3	Red	20	EA
1-00-78371- <b>65780</b> -9	Orange	20	EA
1-00-78371- <b>65781</b> -6	Hi-Viz Orange	20	EA
1-00-78371- <b>65782</b> -3	Gray	20	EA
1-00-78371- <b>65783</b> -0	Hi-Viz Yellow	20	EA
1-00-78371- <b>65784</b> -7	Navy Blue	20	EA
1-00-78371- <b>65785</b> -4	Tan	20	EA



## Helmets, Welding

### 3M™ Speedglas™ American Pride Welding Helmet 100 07-0012-31AP

The Speedglas 100 American Helmet with Auto-Darkening Filter 100V is good for Stick, MIG and most TIG welding processes. User selectable dark shades 8 through 12 and viewing area of 6.05 sq. in. It has three user-selectable sensitivity levels for reliable arc detection and has excellent optical quality. It is shade 3 in the light state.



UPC	Case Qty	Units
0-00-51131- <b>37238</b> -2	1	EA

## Helmets, Welding

### 3M™ Ratchet Headgear H8A, Head and Face Protection with 3M™ Clear Polycarbonate Faceshield WP96

A combination headgear and faceshield safety system. Includes H8A ratchet headgear and WP96 polycarbonate faceshield. Adjustable ratchet suspension. Molded faceshield provides impact protection. Requires protective eyewear (sold separately).



UPC	Case Qty	Units
1-00-78371- <b>82783</b> -7	5	EA

### 3M™ Speedglas™ Black Welding Helmet 100 07-0012-31BL

The Speedglas 100 Black Helmet with Auto-Darkening Filter 100V is good for Stick, MIG and most TIG welding processes. User selectable dark shades 8 through 12 and viewing area of 6.05 sq. in. It has three user-selectable sensitivity levels for reliable arc detection and has excellent optical quality. It is shade 3 in the light state.



UPC	Case Qty	Units
0-00-51131- <b>37232</b> -0	1	EA

## Headband

### 3M™ Peltor™ PowerCom Plus™ Headband MT53H7A4610

Integrated 2-way radio headset is ideal for communicating in high-noise environments.



UPC	Case Qty	Units
0-73-18640- <b>05172</b> -0	1	EA

## Earmuffs

### 3M™ Peltor™ Optime™ 98 Cap-Mounted Earmuffs, Hearing Conversation

Feature a universal mounting attachment that fits most hard hats. For noise levels up to 98 dBA.



UPC	Case Qty	Units
1-00-93045- <b>08093</b> -6	10	EA

### 3M™ Peltor™ OX Series Over the Head Earmuffs

3M's latest advancement in hearing conservation. New technologies in comfort, design and protection all come together in this groundbreaking earmuff line. The X3A features a newly designed spacer to help improve attenuation without the need for a much larger cup or double cup design.



This lightweight earmuff is designed for protection against high-level industrial noise and other loud sounds. It features an electrically insulated wire headband, often referred to as "dielectric".

UPC	Color	Case Qty	Units
1-00-93045- <b>93725</b> -4	Red	10	EA
1-00-93045- <b>93726</b> -1	Green	10	EA
1-00-93045- <b>93727</b> -8	Black	10	EA



## 3M™ Uncorded Foam Earplugs 1100

3M™ 1100 uncorded foam earplugs feature soft, hypoallergenic foam and a tapered design to fit comfortably in the ear canal.

- Smooth, dirt resistant surface for hygiene
- Comfortable for a wide range of ear canal sizes
- Test compatible with 3M™ E-A-Rfit™ Validation System
- Noise Reduction Rating (NRR): 29 dB. CSA Class AL


UPC	Grade	Color	Case Qty	Units
5-00-51138- <b>29008</b> -0	Orange	1000	EA	EA



## 3M™ E-A-R™ Classic™ Plus Corded Earplugs in Polybag 311-1105

Classic™ Plus earplugs are slightly longer than regular E-A-R™ Classic™ earplugs to fit deeper into the ear canal and provide higher noise reduction.

- Flame-resistant and moisture-resistant.
- Noise Reduction Rating (NRR): 33 dB. CSA Class AL.
- Test compatible with 3M™ E-A-Rfit™ Validation System



UPC	Case Qty	Units
1-00-80529- <b>11023</b> -4	2000	PR

## 3M™ E-A-R™ Swerve™ Banded Hearing Protector 322-2000

Combines a cutting-edge band design with the effectiveness of E-A-R foam earplugs.

- Neckband adjusts for optimal fit
- Ergonomic design minimizes interference with shirt collars and headgear
- Noise Reduction Rating (NRR)\*: 28 dB with the Flex 28 pod, or 19 dB with the Comfort Pod  
CSA Class AL (Flex 28), CSA Class BL (Comfort Pod)




UPC	Case Qty	Units
1-00-80529- <b>22004</b> -9	10	PR



# Ear Plugs

## 3M™ E-A-R™ Push-Ins™ Uncorded Earplugs



Constructed of 3M™ E-A-Rform™ foam, these earplugs feature a no roll-down design and a blue stem for a quick and easy fit.

- Poly bag keeps earplugs clean before use.
- Flexible stem makes insertion and removal cleaner and easier.
- Test compatible with 3M™ E-A-Rfit™ Validation System
- Noise Reduction Rating (NRR)\* 28 dB. CSA Class AL.

UPC	Case Qty	Units
1-00-80529- <b>18000</b> -8	400	PR

## 3M™ E-A-R™ Push-Ins™ Softouch™ Corded Foam Earplugs




Feature 3M™ E-A-Rform™ Foam that adjusts to the shape of the ear canal, helping to create a noise-reducing seal.

- Flexible, pistol-grip handle and stem allow fingertip control for easy insertion. Helps eliminate dirt transfer for greater hygiene.
- Tapered-cone shape and smooth, soft foam provide in-ear comfort and hearing protection
- Noise Reduction Rating (NRR) 31 dB. CSA Class AL.

Description	UPC	Case Qty	Units
318-4001	1-00-80529- <b>18018</b> -3	2000	PR

## 3M™ E-A-Rsoft™ Yellow Neon™ Foam Earplugs



Seal the ear canal with soft, slow-recovery foam for excellent noise reduction and comfort.

- Poly bag keeps each pair of earplugs clean before use.
- Regular size fits most ear canals.
- Noise Reduction Rating (NRR): 33 dB. CSA Class AL.
- Test compatible with 3M™ E-A-Rfit™ Validation System.

### Corded

UPC	Color	Case Qty	Units
1-00-80529- <b>11033</b> -3	Yellow	2000	PR

### Uncorded

UPC	Size	Color	Case Qty	Units
1-00-80529- <b>12064</b> -6	Large Size	Yellow	2000	PR
1-00-80529- <b>12063</b> -9	Regular Size	Yellow	2000	PR

## 3M™ E-A-R™ Classic™ Earplugs



Set the standard in hearing protection as the world's first foam earplugs. Constructed from slow-recovery foam, these disposable earplugs are uniquely moisture-resistant.

- Flame-resistant and moisture-resistant
- Noise Reduction Rating (NRR): 29 dB. CSA Class AL.
- Test compatible with 3M™ E-A-Rfit™ Validation System.

UPC	Color	Case Qty	Units
1-00-80529- <b>10000</b> -6	Yellow	2000	PR
1-00-80529- <b>12002</b> -8	Yellow	2000	PR

## 3M™ Skull Screws™ Earplugs




Sport the tough look of threaded metal, but feel of soft foam, while offering push-to-fit convenience and noise attenuation with attitude.

- Push-to-fit style means no earplug roll down required
- Foam tips stay clean, even when your hands are dirty.
- Noise Reduction Rating (NRR) of 32 dB CSA Class AL. Improved NRR of 32 dB

UPC	Case Qty	Units
1-00-93045- <b>92952</b> -5	480	PR

## 3M™ E-A-R™ Ultrafit™ Earplugs

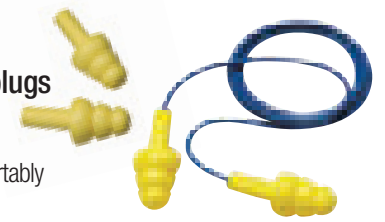

Features a proprietary, premolded, triple-flange design that fits comfortably in most ear canals.

- Poly bag keeps each pair of earplugs available or accessible for re-use.
- Soft polymer is washable and reusable
- Noise Reduction Rating (NRR): 25 dB. CSA Class AL
- Test compatible with 3M™ E-A-Rfit™ Validation System

UPC	Description	Case Qty	Units
1-00-80529- <b>40003</b> -8	Corded	400	PR
1-00-80529- <b>40002</b> -1	Uncorded	400	PR

## Ear Plugs (cont.)

### 3M™ Peltor™ EARbud™ Noise Isolating Headphones 2600N

Tune into higher compliance. The EARbud2600N are MP3 player compatible and provide an NRR of 20 dB with Ultrafit Tips and NRR 29dB with the Skull Screw Tips. The easy access volume control limits input volume to a safe 82 dB level.




UPC	Case Qty	Units
1-00-78371- <b>61273</b> -0	10	EA

## Noise Indicator

### 3M™ Noise Indicator, NI-100

Innovative and durable noise detection, the NI-100 noise indicator alerts you when noises in an area reach potentially hazardous levels. The noise indicator's small size and lightweight design make it ideal for workers in a variety of industries. With a rechargeable battery that operates for up to 200 hours between charges, it's an economical investment in your hearing conservation program.

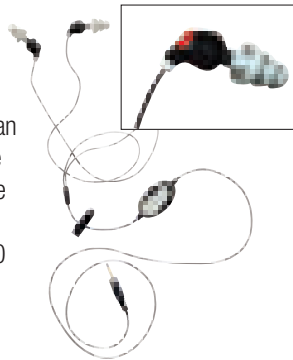

- Red Flashing LED indicates noise levels are above 85 dBA and hearing protection may be required.
- Green Flashing LED indicates noise levels are below 85 dBA and hearing protection may not be necessary.

UPC	Case Qty	Units
1-00-93045- <b>93644</b> -8	10	EA

## Protective Coveralls

### 3M™ Disposable Protective Coverall Safety Work Wear 4540

Disposable safety work wear made of a high quality laminated material with a breathable back panel for improved air circulation. Helps provide barrier protection against light liquid splashes and hazardous dusts.



UPC	Size	Case Qty	Units
0-00-51131- <b>49806</b> -8	M	25	EA
0-00-51131- <b>49807</b> -5	L	25	EA
0-00-51131- <b>49808</b> -2	XL	25	EA
0-00-51131- <b>49809</b> -9	XXL	25	EA
0-00-51131- <b>49810</b> -5	3XL	25	EA
0-00-51131- <b>49811</b> -2	4XL	25	EA

## Roofing Kit

### 3M™ Roofing Kit 20058

3M™ Roofing Kits are not only designed for compliance with most roofing applications, they are designed for versatility as well, offering you a wide selection of fall protection equipment in one convenient container.



UPC	Case Qty
1-00-78371- <b>00086</b> -5	1 ea per case

## First Aid

### 3M™ Construction/Industrial First Aid Kit

Construction/industrial first aid kit includes 118 pieces.



UPC	Case Qty	Units
5-00-51141- <b>34020</b> -8	6	EA

## Reflective Safety Vests

### 3M™ Construction Safety Vest 94900-80030

Class 3, Short Sleeve, Hi-Viz Yellow Vest with 3M™ Scotchlite™ Silver Tape. ANSI-107-2004



UPC	Size	Color	Case Qty
0-00-51141- <b>40186</b> -7	One size fits most	Hi-Viz Yellow	5 ea per case

### 3M™ Construction Safety Vest 94620-80030

The Class 2, Two-Tone Construction Safety Vest features Hi-Viz Yellow Color, with combination Orange and 3M™ Scotchlite™ Silver Tape. ANSI 107-2004, Class 2, FHWA.



UPC	Size	Color	Case Qty
0-00-51141- <b>37664</b> -6	One size fits most	Hi-Viz Yellow	5 ea per case

## Reflective Safety Vests (cont.)

### 3M™ Construction Safety Vest 94621-80030

The Class 2, Two-Tone Construction Safety Vest features Hi-Viz Orange Color, with combination Yellow and 3M™ Scotchlite™ Silver Tape. ANSI 107-2004, Class 2, FHWA.



UPC	Size	Color	Case Qty
0-00-511 41- <b>96466</b> -9	One size fits most	Hi-Viz Orange	5 ea per case

### 3M™ Surveyors Safety Vest 94618-80030

The Class 2 Surveyor's Safety Vest features 4 convenient pockets with front radio pocket with flap, 2 LG interior plus pencil pockets. Adjustable size. HiViz Yellow Color and 2 in 3M Scotchlite™ Silver Reflective Material. ANSI 107-2004, Class 2, FHWA



UPC	Size	Color	Case Qty
0-00-78371- <b>94618</b> -0	One size fits most	Hi-Viz Yellow	5 ea per case

## Work Gloves

### 3M™ Comfort Grip General Use Gloves


This washable glove's nitrile coating provides excellent grip, even in wet or oily conditions, and its nylon stretch liner gives you a breathable, "second skin" fit.



UPC	Style	Cuff Style	Color	Size	Pair/bag
00-54007- <b>98954</b> -7	CGM-GU	Knit wrist	Grey	8	6
00-54007- <b>98955</b> -4	CGL-GU	Knit wrist	Grey	9	6
00-54007- <b>98956</b> -1	CGXL-GU	Knit wrist	Grey	10	6

### 3M™ Comfort Grip Cut Resistant Gloves

These gloves provide the same comfort as the 3M™ Comfort Grip General Use Gloves but with an Ultra High Molecular Weight Polyethylene Composite liner that gives you exceptional cut, puncture and tear resistance.



UPC	Style	Cuff Style	Color	Size	Pair/bag
00-54007- <b>98957</b> -8	CGM-CR	Knit wrist	Grey	8	6
00-54007- <b>98958</b> -5	CGL-CR	Knit wrist	Grey	9	6
00-54007- <b>98959</b> -2	CGXL-CR	Knit wrist	Grey	10	6

## 3M™ Gripping Material Work Gloves

The 3M™ Gripping Material sewn into the palm and fingers of these gloves helps improve users' grip while providing slip resistance. The durable synthetic suede, combined with padded fingers and thumbs, adds protection, while the expansion areas on the finger backs and knuckles provide a comfortable fit.



UPC	Style	Cuff Style	Color	Size	Pair/bag
00-51115- <b>63527</b> -4	WGS-1	Elastic Adjustable	Grey/Black	8	1
00-51115- <b>63546</b> -5	WGM-1	Elastic Adjustable	Grey/Black	9	1
00-51115- <b>63548</b> -9	WGL-1	Elastic Adjustable	Grey/Black	10	1
00-51115- <b>63550</b> -2	WGXL-1	Elastic Adjustable	Grey/Black	11	1

## Aerial Lift Kits

### 3M™ Aerial Kit 30500

This kit for use on aerial lifts contains a 3M™ SafeLight Fall Protection Harness 10910 (Universal), 3M™ SafeLight 6 foot Energy-Absorbing Lanyard with 3M™ Snap Hooks 209512 and 3M™ Tool Bag 4514 for storage.



UPC	Case Qty
1-00-78371- <b>00088</b> -9	1 ea per case

### 3M™ Aerial Kit 30514

This kit for use on aerial lifts contains a 3M™ SafeLight Fall Protection Harness 10950 (Universal), 3M™ SafeLight 6 foot **Low Profile** Energy-Absorbing Lanyard with 3M™ Snap Hooks 209712 and 3M™ Tool Bag 4514 for storage.



UPC	Case Qty
1-00-78371- <b>00458</b> -0	1 ea per case



## Vinyl Tapes

### Scotch® Super 33+™ Vinyl Electrical Tape

This black, 7 mil tape on a 1" core, combines the flexibility of a PVC backing with excellent electrical insulating properties to provide primary electrical insulation for splices up to 600V.

Abrasion, corrosion and sunlight-resistant, it makes an excellent protective jacketing for high-voltage cables and wire harnessing. UL Listed and CSA Certified, it resists alkalis and acids, and is flame-retardant. Excellent all-weather performance in cold to 0°F (-18°C) or hot to 221°F (105°C).

UPC	Size	Grade	Color	Case Qty	Units
0-00-54007-06130-4	.75 in x 20 ft	7 mil	Black	100	RL
0-00-54007-10075-1	.75 in x 44 ft	7 mil	Black	100	RL
0-00-54007-06133-5	.75 in x 52 ft	7 mil	Black	100	RL
0-00-54007-06132-8	.75 in x 66 ft	7 mil	Black	20	RL
0-00-54007-00053-2	.75 in x 36 yd	7 mil	Black	48	RL
0-00-54007-08949-0	1 in x 36 yd	7 mil	Black	48	RL
0-00-54007-50236-4	1.5 in x 36 yd	7 mil	Black	50	RL

### Scotch® Professional Grade Vinyl Electrical Tape Super 88

Offers excellent mechanical/abrasion resistance, and is thick for a quick buildup. For professional use, this 8.5 mil tape combines the flexibility of a PVC backing with excellent electrical insulating properties to provide primary electrical insulation for splices up to 600V and protective jacketing.

UL Listed and CSA Certified. Excellent resistance to sunlight, abrasion, moisture, copper corrosion, alkalis and acids. Excellent all-weather performance in cold to 0°F (-18°C) or hot to 221°F (105°C).



UPC	Size	Grade	Color	Case Qty	Units
0-00-54007-10307-3	.75 in x 44 ft	8.5 mil	Black	100	RL
0-00-54007-06143-4	.75 in x 66 ft	8.5 mil	Black	100	RL
0-00-54007-10323-3	.75 in x 36 yd	8.5 mil	Black	48	RL
0-00-54007-10331-8	1 in x 36 yd	8.5 mil	Black	48	RL
0-00-54007-10364-6	1.5 in x 44 ft	8.5 mil	Black	100	RL
0-00-54007-10349-3	1.5 in x 36 yd	8.5 mil	Black	12	RL
0-00-54007-10356-1	2 in x 36 yd	8.5 mil	Black	12	RL

## Vinyl Tapes

### Scotch® Vinyl Electrical Tape 35

Identify wires, leads, splices and terminations. Abrasion and weather resistant 7 mil tape. Excellent mechanical and electrical insulation properties. Wraps smoothly and holds tightly over a wide range of temperatures. Mark safety areas. UL listed, CSA approved.



UPC	Size	Grade	Color	Case Qty	Units
0-00-54007-10240-3	.5 in x 20 ft	7 mil	Blue	100	RL
0-00-54007-10299-1	.5 in x 20 ft	7 mil	Brown	100	RL
0-00-54007-10281-6	.5 in x 20 ft	7 mil	Gray	100	RL
0-00-54007-10265-6	.5 in x 20 ft	7 mil	Green	100	RL
0-00-54007-10273-1	.5 in x 20 ft	7 mil	Orange	100	RL
0-00-54007-10224-3	.5 in x 20 ft	7 mil	Red	100	RL
0-00-54007-10232-8	.5 in x 20 ft	7 mil	White	100	RL
0-00-54007-10257-1	.5 in x 20 ft	7 mil	Yellow	100	RL
0-00-54007-10836-8	.75 in x 66 ft	7 mil	Blue	100	RL
0-00-54007-10885-6	.75 in x 66 ft	7 mil	Brown	100	RL
0-00-54007-00072-3	.75 in x 66 ft	7 mil	Gray	100	RL
0-00-54007-10851-1	.75 in x 66 ft	7 mil	Green	100	RL
0-00-54007-10869-6	.75 in x 66 ft	7 mil	Orange	100	RL
0-00-54007-10810-8	.75 in x 66 ft	7 mil	Red	100	RL
0-00-54007-11271-6	.75 in x 66 ft	7 mil	Violet	100	RL
0-00-54007-10828-3	.75 in x 66 ft	7 mil	White	100	RL
0-00-54007-10844-3	.75 in x 66 ft	7 mil	Yellow	100	RL

### 3M™ Temflex™ General Use Vinyl Electrical Tape 1700

The economical solution for less demanding indoor jobs. On a 1½" core, this black, 7 mil economy-grade vinyl tape serves as a general purpose tape. UL listed, CSA approved.



UPC	Size	Grade	Color	Case Qty	Units
0-00-54007-69764-0	.75 in x 60 ft	7 mil	Black	100	RL
0-00-54007-49700-4	.75 in x 36 yd	7 mil	Black	100	RL
0-00-54007-43962-2	1 in x 66 ft	7 mil	Black	99	RL

## Rubber Splicing Tape

### Scotch® Linerless Rubber Splicing Tape 130C

A high voltage, insulating, thermally dissipating and self-bonding splicing tape. Typical applications include primary electrical insulation for splicing all solid dielectric cables through 69kV.



UPC	Size	Color	Case Qty	Units
0-00-54007-41717-0	.75 in x 30 ft	Black	24	RL
0-00-54007-41751-4	1 in x 10 ft	Black	24	RL
0-00-54007-41753-8	1 in x 30 ft	Black	24	RL
0-00-54007-41718-7	1½ in x 30 ft	Black	12	RL
0-00-54007-41754-5	2 in x 30 ft	Black	12	RL

## Cable Ties

### 3M™ Miniature Ties



UPC	Description	Size	Color	Case Qty	Units
0-00-51128-59273-1	CT4BK18-C	4.1 in x 0.1 in	Black	100	EA
0-00-51128-59270-8	CT4BK18-M	4.1 in x 0.1 in	Black	1000	EA
0-00-51128-59275-5	CT4NT18-C	4.1 in x 0.1 in	Natural	100	EA
0-00-51128-59276-2	CT4NT18-M	4.1 in x 0.1 in	Natural	1000	EA
0-00-51128-59277-9	CT6BK18-C	6.1 in x 0.1 in	Black	100	EA
0-00-51128-59278-6	CT6NT18-C	6.1 in x 0.1 in	Natural	100	EA
0-00-51128-59279-3	CT6NT18-M	6.1 in x 0.1 in	Natural	1000	EA
0-00-51128-59281-6	CT8BK18-M	8.1 in x 0.1 in	Black	1000	EA
0-00-51128-59282-3	CT8NT18-C	8.1 in x 0.1 in	Natural	100	EA
0-00-51128-59283-0	CT8NT18-M	8.1 in x 0.1 in	Natural	1000	EA

## Cable Ties (cont.)

### 3M™ Intermediate Ties



UPC	Description	Size	Color	Case Qty	Units
0-00-51128- <b>59284</b> -7	CT6BK40-C	5.8 in x 0.14 in	Black	100	EA
0-00-51128- <b>59285</b> -4	CT6BK40-M	5.8 in x 0.14 in	Black	1000	EA
0-00-51128- <b>59286</b> -1	CT6NT40-C	5.8 in x 0.14 in	Natural	100	EA
0-00-51128- <b>59287</b> -8	CT6NT40-M	5.8 in x 0.14 in	Natural	1000	EA
0-00-51128- <b>59288</b> -5	CT8BK40-C	8.9 in x 0.14 in	Black	100	EA
0-00-51128- <b>59290</b> -8	CT8NT40-C	8.9 in x 0.14 in	Natural	100	EA
0-00-51128- <b>59291</b> -5	CT8NT40-M	8.9 in x 0.14 in	Natural	1000	EA

### 3M™ Light Heavy Duty Ties



UPC	Description	Size	Color	Case Qty	Units
0-00-51128- <b>59310</b> -3	CT8BK120-L	9 in x 0.3 in	Black	50	EA
0-00-51128- <b>59311</b> -0	CT8NT120-L	9 in x 0.3 in	Natural	50	EA
0-00-51128- <b>59312</b> -7	CT15BK120-C	15 in x 0.3 in	Black	100	EA
0-00-51128- <b>59313</b> -4	CT15BK120-D	15 in x 0.3 in	Black	500	EA
0-00-51128- <b>59315</b> -8	CT15NT120-C	15 in x 0.3 in	Natural	100	EA
0-00-51128- <b>59317</b> -2	CT15NT120-D	15 in x 0.3 in	Natural	500	EA

### 3M™ Standard Ties



UPC	Description	Size	Color	Case Qty	Units
0-00-51128- <b>59293</b> -9	CT8BK50-C	7.6 in x 0.18 in	Black	100	EA
0-00-51128- <b>59294</b> -6	CT8BK50-M	7.6 in x 0.18 in	Black	1000	EA
0-00-51128- <b>59297</b> -7	CT8NT50-C	7.6 in x 0.18 in	Natural	100	EA
0-00-51128- <b>59299</b> -1	CT8NT50-M	7.6 in x 0.18 in	Natural	1000	EA
0-00-51128- <b>59559</b> -6	CT8RD50-C	7.6 in x 0.18 in	Red	100	EA
0-00-51128- <b>59300</b> -4	CT11BK50-C	11.1 in x 0.18 in	Black	100	EA
0-00-51128- <b>59301</b> -1	CT11BK50-D	11.1 in x 0.18 in	Black	500	EA
0-00-51128- <b>59302</b> -8	CT11NT50-C	11.1 in x 0.18 in	Natural	100	EA
0-00-51128- <b>59303</b> -5	CT11NT50-D	11.1 in x 0.18 in	Natural	500	EA
0-00-51128- <b>59560</b> -2	CT11RD50-C	11.1 in x 0.18 in	Red	100	EA
0-00-51128- <b>59304</b> -2	CT15BK50-C	14.6 in x 0.18 in	Black	100	EA
0-00-51128- <b>59305</b> -9	CT15BK50-D	14.6 in x 0.18 in	Black	100	EA
0-00-51128- <b>59307</b> -3	CT15NT50-C	14.6 in x 0.18 in	Natural	100	EA
0-00-51128- <b>59309</b> -7	CT15NT50-D	14.6 in x 0.18 in	Natural	100	EA

### 3M™ Heavy Duty Ties



UPC	Description	Size	Color	Case Qty	Units
0-00-51128- <b>59318</b> -9	CT24BK175-L	24 in x 0.34 in	Black	50	EA
0-00-51128- <b>59319</b> -6	CT24NT175-L	24 in x 0.34 in	Natural	50	EA
0-00-51128- <b>59320</b> -2	CT36BK175-L	36 in x 0.34 in	Black	100	EA
0-00-51128- <b>59321</b> -9	CT36NT175-L	36 in x 0.34 in	Natural	500	EA
0-00-51128- <b>59322</b> -6	CT48BK175-L	47.9 in x 0.36 in	Black	100	EA
0-00-51128- <b>59323</b> -3	CT48NT175-L	47.9 in x 0.36 in	Natural	500	EA

### 3M™ Screw Mount Ties



UPC	Description	Size	Color	Case Qty	Units
0-00-51128- <b>59292</b> -2	CT8BK50S-C	8.6 in x 0.18 in	Black	100	EA
0-00-51128- <b>59295</b> -3	CT8BK50S-M	8.6 in x 0.18 in	Black	1000	EA
0-00-51128- <b>59296</b> -0	CT8NT50S-C	8.6 in x 0.18 in	Natural	100	EA
0-00-51128- <b>59298</b> -4	CT8NT50S-M	8.6 in x 0.18 in	Natural	1000	EA
0-00-51128- <b>59306</b> -6	CT15NT50S-L	15.1 in x 0.18 in	Natural	50	EA
0-00-51128- <b>59308</b> -0	CT15NT50S-D	15.1 in x 0.18 in	Natural	500	EA
0-00-51128- <b>59314</b> -1	CT15NT120S-L	15.7 in x 0.3 in	Natural	50	EA
0-00-51128- <b>59316</b> -5	CT15NT120S-D	15.7 in x 0.3 in	Natural	500	EA

## Barricade Tapes

### Scotch® Barricade Tape 300 CAUTION

Effective and economical. Bold two-inch black characters on a bright background are designed to attract attention and provide a warning message that is clearly visible.



UPC	Size	Color	Case Qty	Units
0-00-51128- <b>53042</b> -9	3 in x 1000 ft	Yellow	8	RL

### Scotch® Buried Barricade Tape 302 CAUTION BURIED ELECTRIC LINE

Effective and economical. Bold two-inch black characters on a bright background are designed to attract attention and provide a warning message that is clearly visible.



UPC	Size	Color	Case Qty	Units
0-00-51128- <b>53461</b> -8	3 in x 1000 ft	Red	8	RL

### Scotch® Barricade Tape 357 DANGER

Effective and economical. Bold two-inch black characters on a bright background are designed to attract attention and provide a warning message that is clearly visible.



UPC	Size	Color	Case Qty	Units
0-00-51128- <b>57764</b> -6	3 in x 300 ft	Red	8	RL

---

**Product Use:** Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application. **Warranty, Limited Remedy, and Disclaimer:** Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price. **Limitation of Liability:** Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



### 3M Building and Construction Markets

Building 225-3S-06  
St. Paul, MN 55144-1000  
1-866-513-4026  
[www.3M.com/construction](http://www.3M.com/construction)

Released March, 2015.

Please Recycle. Printed in U.S.A.  
© 3M 2015. All rights reserved.  
70-0709-4163-1

3M, Scotch-Brite, Roloc, Stikit, Hookit, Green Corps, Tri-M-ite, Wetordry, Super 77, Fastbond, EPX, Venture Tape, Scotch-Blue, Hand-Masker, VentureClad, VHB, Tartan, Adflo, Powerflow, Speedglas, Tekk Protection, Super 33+, Temflex, Classic, Ultrafit, EARbud, Skull Screws, E-A-Rsoft, Push-Ins, SecureFit, BX, Virtua, Moon Dawg, Peltor, PowerCom Plus, Optime, E-A-R and swerve are trademarks of 3M Company.

Scotch is a registered trademark of 3M Company.