


SOLID CARBIDE FORM GROUND REPLACEABLE INSERTS

Skipped Tooth Inserts (E2) - UN + Metric

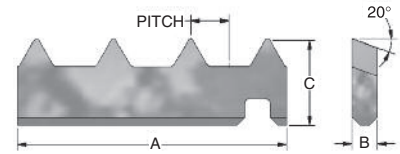

SKIPPED TOOTH INSERTS (E2) - UN + METRIC

Dimensions in Inches

| Part Number | Pitch | Flank Angle | Measurements | | | Clearance Angle | Coatings Available | | |
|-----------------|-------|-------------|--------------|-------|-------|-----------------|--------------------|---------|------------|
| | | | A | B | C | | Uncoated | Z TiAlN | V Hardmill |
| ATM-38A7E2 | 7UN | 60 | 1.000 | 0.093 | 0.310 | 20 | X | X | O |
| ATM-38A8E2 | 8UN | 60 | 1.000 | 0.093 | 0.310 | 20 | X | X | O |
| ATM-410A4E2 | 4UN | 60 | 1.500 | 0.130 | 0.375 | 20 | X | X | O |
| ATM-410A4.5E2 | 4.5UN | 60 | 1.500 | 0.130 | 0.375 | 20 | X | X | O |
| ATM-410A5E2 | 5UN | 60 | 1.500 | 0.130 | 0.375 | 20 | X | X | O |
| ATM-410A6E2 | 6UN | 60 | 1.500 | 0.130 | 0.375 | 20 | X | X | O |
| ATM-410A7E2 | 7UN | 60 | 1.500 | 0.130 | 0.375 | 20 | X | X | O |
| ATM-410A8E2 | 8UN | 60 | 1.500 | 0.130 | 0.375 | 20 | X | X | O |
| ATM-38A3.5MME2 | 3.5MM | 60 | 1.000 | 0.093 | 0.310 | 20 | X | X | O |
| ATM-38A3.0MME2 | 3.0MM | 60 | 1.000 | 0.093 | 0.280 | 20 | X | X | O |
| ATM-410A6.0MME2 | 6.0MM | 60 | 1.500 | 0.130 | 0.375 | 20 | X | X | O |
| ATM-410A5.0MME2 | 5.0MM | 60 | 1.500 | 0.130 | 0.375 | 20 | X | X | O |
| ATM-410A4.5MME2 | 4.5MM | 60 | 1.500 | 0.130 | 0.375 | 20 | X | X | O |
| ATM-410A4.0MME2 | 4.0MM | 60 | 1.500 | 0.130 | 0.375 | 20 | X | X | O |
| ATM-410A3.5MME2 | 3.5MM | 60 | 1.500 | 0.130 | 0.375 | 20 | X | X | O |
| ATM-410A3.0MME2 | 3.0MM | 60 | 1.500 | 0.130 | 0.375 | 20 | X | X | O |

X = In Stock ; O = Special Order ; Other Coatings Available