


SOLID CARBIDE FORM GROUND REPLACEABLE INSERTS

STUB Acme (SA) Threads

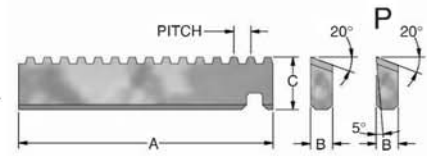

STUB ACME (SA) THREADS

Dimensions in Inches

Part Number	Pitch	Flank Angle	Measurements			Clearance Angle	Coatings Available		
			A	B	C		Uncoated	Z TiAlN	V Hardmill
ATM-410A3SA	3SA	29	1.500	0.130	0.375	20	X	O	O
ATM-410A4SA	4SA	29	1.500	0.130	0.375	20	X	O	O
ATM-410A4SAP	4SA	29	1.500	0.130	0.375	20	X	O	O
ATM-410A5SA	5SA	29	1.500	0.130	0.375	20	X	O	O
ATM-410A5SAP	5SA	29	1.500	0.130	0.375	20	X	O	O
ATM-410A6SA	6SA	29	1.500	0.130	0.375	20	X	O	O
ATM-410A6SAP	6SA	29	1.500	0.130	0.375	20	X	O	O
ATM-410A8SA	8SA	29	1.500	0.130	0.375	20	X	O	O
ATM-410A8SAP	8SA	29	1.500	0.130	0.375	20	X	O	O
ATM-410A10SA	10SA	29	1.500	0.130	0.310	20	X	O	O
ATM-410A10SAP	10SA	29	1.500	0.130	0.310	20	X	O	O
ATM-410A12SA	12SA	29	1.500	0.130	0.310	20	X	O	O
ATM-410A12SAP	12SA	29	1.500	0.130	0.310	20	X	O	O

X = In Stock ; O = Special Order ; Other Coatings Available ; Call for Delivery