
S AMBINIASTER FAN COMPANY

READ AND SAVE THESE INSTRUCTIONS



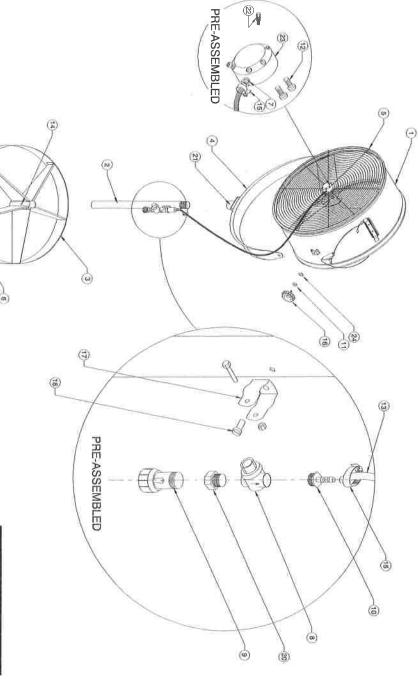

TO REDUCE THE RISK OF FIRE OR SHOCK, DO NOT USE THIS FAN WITH ANY SOLID STATE SPEED CONTROL DEVICE.

USE ONLY ON GFCI PROTECTED RECEPTACLES

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

IMPORTANT: READ AND SAVE THESE INSTRUCTIONS

ASSEMBLY INSTRUCTIONS FOR THE MFBB

- Lay base (3) on flat surface.
 Insert pedestal (2) with threaded side up. Insert non threaded end into base and with the allen wrench, tighten set screw (14) into to threaded end of
- 3. Thread yoke (4) into threaded end of pedestal
- 4. Lay the pedestal and yoke on the ground mister nozzle side up and move of the yoke that has the hose holder (34). Fit lock washer and flat washer (11) & (24) on the knobs (16) and thread into yoke and barrel brackets. side of the barrel. Make sure that the hose connector is facing to that side the barrel into a position to mount the yoke to the two brackets on either
- 5. Connect hose (13) to hose connector (10) and tighten down hose clamp.

GENERAL MAINTENANCE

1. When not in use store fan under cover.

that may have formed during operation. All the nozzles have individual filters integral to the nozzle and are located in the nozzle head assembly which is located at the center of the front guard. 2. This fan has 3 filtering points. There is an inline filter in item (20), This inline filter need to be cleaned periodically. Item (8) is a water filter which requires These nozzles need to be cleaned with warm water to clean out any deposits periodic cleaning. Remove the threaded housing and clean the filter element.

BEFORE OPERATING READ SAFETY INSTRUCTIONS ON BACK PAGE

24	23	22	21	20	19	18	17	16	15	14	13	12	=======================================	10	9	œ	7	6	Ch	4	ω	2		ITEM
82316	07158	07159	82480	00043	03876	82480	00750	02040	01742	00055	07176	00014	00177	07162	07164	07161	07163	00317	82480	07180	02953	03013	07143	PART#
2		لنن	_	1	_			2	2			2	2	1		_1	1	1 (set)	16	_			_	QTY.
FLAT WASHER	MISTING HEAD	NOZZLE	SET SCREW (YOKE)	1/2 NPT ADAPTOR	MOTOR ASSEMBLY W/CORD	SCREW #14 x 3/4"	CLAMP	KNOB	HOSE CLAMP	SET SCREW (BASE)	HOSE 41"	MISTING HEAD SCREWS	LOCK WASHER	HOSE CONNECTOR (1/2 NPT to 3/8)	ON/OFF VALVE	FILTER	1/2 NPT BARB CONNECTOR (1/4 to 3/8)	FOOT-RUBBER	SCREW, HEX W.HD, #14 x 3/4	YOKE	BASE ASSY	PEDESTAL ASS'Y	HOUSING ASS'Y	DESCRIPTION