



**Your experts for
safety, facility
and equipment
identification**

Product Catalog

B30- and B33-Series Materials

BradyID.com/s36

Indoor and Outdoor Vinyl (B-595)

Continuous vinyl material is ideal for lean / 5S labels, pipe markers, equipment and production area identification. These labels offer excellent resistance to oils, detergents, dirt, grime and many solvents. Permanent adhesive, very pliable, good for rough surfaces and outdoor use.

Service temp: -40° F to 180° F
 Application temp: 0° F to 180° F
 Average outdoor durability: 8-10 years
 Agency approvals: **RoHS**




Figure 3



Benchmark Printers

B30 / B33 Series

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
All*	Fig. 3	B30C-500-595-WT	B-595	White	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-595-WT	B-595	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-595-WT	B-595	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-3000-595-WT	B-595	White	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-595-WT	B-595	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-595-YL	B-595	Yellow	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-595-YL	B-595	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-595-YL	B-595	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-3000-595-YL	B-595	Yellow	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-595-YL	B-595	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-595-RD	B-595	Red	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-595-RD	B-595	Red	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-595-RD	B-595	Red	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-595-RD	B-595	Red	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-595-BL	B-595	Blue	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-595-BL	B-595	Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-595-BL	B-595	Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-595-BL	B-595	Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-595-GN	B-595	Green	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-595-GN	B-595	Green	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-595-GN	B-595	Green	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-595-GN	B-595	Green	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-595-OR	B-595	Orange	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-595-OR	B-595	Orange	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-595-OR	B-595	Orange	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-595-OR	B-595	Orange	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-595-BK	B-595	Black	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-595-BK	B-595	Black	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-595-BK	B-595	Black	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-595-BK	B-595	Black	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-595-BR	B-595	Brown	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-595-BR	B-595	Brown	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-595-BR	B-595	Brown	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-595-BR	B-595	Brown	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-595-OC	B-595	Ochre	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-595-OC	B-595	Ochre	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-595-OC	B-595	Ochre	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-595-GD	B-595	Gold	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-595-GD	B-595	Gold	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-595-GD	B-595	Gold	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-595-GD	B-595	Gold	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-595-GY	B-595	Gray	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-595-GY	B-595	Gray	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-595-GY	B-595	Gray	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-595-GY	B-595	Gray	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-595-PL	B-595	Purple	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-595-PL	B-595	Purple	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-595-PL	B-595	Purple	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-595-PL	B-595	Purple	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-595-CL	B-595	Clear	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-595-CL	B-595	Clear	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-595-CL	B-595	Clear	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-595-CL	B-595	Clear	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000

U.S. Patent No. 5,823,689; 6,570,602. Additional patents pending.

✂ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

BradyID.com/s36

Low-Halide Polyester (B-569)

Low-halide content for labeling stainless steel pipes and surfaces.
Applies best to very smooth surfaces and ideal for mounting to rigid panels.

Service temp: -40° F to 212° F
Application temp: 0° F to 212° F
Average outdoor durability: 3-5 years




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
All*	Fig. 3	B30C-500-569-WT	B-569	White	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-WT	B-569	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-WT	B-569	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-3000-569-WT	B-569	White	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-WT	B-569	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-569-YL	B-569	Yellow	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-YL	B-569	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-YL	B-569	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-YL	B-569	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-569-RD	B-569	Red	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-569-RD	B-569	Red	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-569-RD	B-569	Red	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-569-RD	B-569	Red	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-569-BL	B-569	Blue	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-569-BL	B-569	Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-569-BL	B-569	Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-569-BL	B-569	Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-569-LB	B-569	Light Blue	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-LB	B-569	Light Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-LB	B-569	Light Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-LB	B-569	Light Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-569-SB	B-569	Sky Blue	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-SB	B-569	Sky Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-SB	B-569	Sky Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-SB	B-569	Sky Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-569-GN	B-569	Green	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-569-GN	B-569	Green	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-569-GN	B-569	Green	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-569-GN	B-569	Green	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-569-OR	B-569	Orange	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-OR	B-569	Orange	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-OR	B-569	Orange	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-OR	B-569	Orange	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-569-BK	B-569	Black	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-569-BK	B-569	Black	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-569-BK	B-569	Black	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-569-BK	B-569	Black	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-569-BR	B-569	Brown	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-569-BR	B-569	Brown	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-569-BR	B-569	Brown	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-569-BR	B-569	Brown	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-569-OC	B-569	Ochre	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-OC	B-569	Ochre	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-OC	B-569	Ochre	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-OC	B-569	Ochre	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-569-TN	B-569	Tan	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-TN	B-569	Tan	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-TN	B-569	Tan	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-TN	B-569	Tan	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-569-GY	B-569	Gray	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-GY	B-569	Gray	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-GY	B-569	Gray	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-GY	B-569	Gray	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-569-PL	B-569	Purple	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-569-PL	B-569	Purple	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-569-PL	B-569	Purple	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-569-PL	B-569	Purple	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-569-PK	B-569	Pink	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-PK	B-569	Pink	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-PK	B-569	Pink	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-PK	B-569	Pink	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-569-CL	B-569	Clear	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-CL	B-569	Clear	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-CL	B-569	Clear	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-CL	B-569	Clear	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000

✂ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

BradyID.com/s36

Pre-Printed GHS / CLP Chemical Labels (B-569 and B-7569)

- Blank labels with pre-printed red diamonds allow the printer to produce two-color GHS / CLP labels in one print pass
- Three sizes of labels, each with diamond layouts that match templates in the printer app (if applicable) or in the Brady Workstation GHS App
- Indoor / outdoor vinyl material and durable inks withstand exposure to moisture, chemicals and handling

Service temp: -4° F to 180° F
 Application temp: 50° F to 180° F
 Average outdoor durability: 3-5 years



Benchtop Printers

B30 / B33 Series

Fits Printers	Catalog #	B#	Material	Legend	Label Height Inch (mm)	Label Width Inch (mm)	Labels Per Roll	Rec. Ribbon
All*	B30-260-7569-CLP1	B-7569	Vinyl		2.170 (55.0)	3.350 (85.0)	340	B30-R10000
All*	B30-261-7569-CLP1	B-7569	Vinyl		2.950 (75.0)	4.330 (110.0)	270	B30-R10000
All*	B30-262-7569-CLP1	B-7569	Vinyl		4.130 (105.0)	6.100 (155.0)	200	B30-R10000
All*	B30-260-7569-CLP2	B-7569	Vinyl		2.170 (55.0)	3.350 (85.0)	340	B30-R10000
All*	B30-261-7569-CLP2	B-7569	Vinyl		2.950 (75.0)	4.330 (110.0)	270	B30-R10000
All*	B30-262-7569-CLP2	B-7569	Vinyl		4.130 (105.0)	6.100 (155.0)	200	B30-R10000
All*	B30-260-7569-CLP3A	B-7569	Vinyl		2.170 (55.0)	3.350 (85.0)	340	B30-R10000
All*	B30-261-7569-CLP3A	B-7569	Vinyl		2.950 (75.0)	4.330 (110.0)	270	B30-R10000
All*	B30-262-7569-CLP3A	B-7569	Vinyl		4.130 (105.0)	6.100 (155.0)	200	B30-R10000
All*	B30-260-7569-CLP3B	B-7569	Vinyl		2.170 (55.0)	3.350 (85.0)	340	B30-R10000
All*	B30-261-7569-CLP3B	B-7569	Vinyl		2.950 (75.0)	4.330 (110.0)	270	B30-R10000
All*	B30-262-7569-CLP3B	B-7569	Vinyl		4.130 (105.0)	6.100 (155.0)	200	B30-R10000
All*	B30-260-7569-CLP4A	B-7569	Vinyl		2.170 (55.0)	3.350 (85.0)	340	B30-R10000
All*	B30-261-7569-CLP4A	B-7569	Vinyl		2.950 (75.0)	4.330 (110.0)	270	B30-R10000
All*	B30-262-7569-CLP4A	B-7569	Vinyl		4.130 (105.0)	6.100 (155.0)	200	B30-R10000
All*	B30-260-569-CLP4B	B-569	Polyester		2.170 (55.0)	3.350 (85.0)	340	B30-R10000
All*	B30-260-7569-CLP4B	B-7569	Vinyl		2.170 (55.0)	3.350 (85.0)	340	B30-R10000
All*	B30-261-569-CLP4B	B-569	Polyester		2.950 (75.0)	4.330 (110.0)	270	B30-R10000
All*	B30-261-7569-CLP4B	B-7569	Vinyl		2.950 (75.0)	4.330 (110.0)	270	B30-R10000
All*	B30-262-569-CLP4B	B-569	Polyester		4.130 (105.0)	6.100 (155.0)	200	B30-R10000
All*	B30-262-7569-CLP4B	B-7569	Vinyl		4.130 (105.0)	6.100 (155.0)	200	B30-R10000
All*	B30-18-7569-CLP4C	B-7569	Vinyl		1.000 (25.4)	3.000 (76.2)	1000	B30-R10000

Easily design GHS labels with the Brady Workstation GHS App

- Select from built-in pre-formatted label layouts with GHS symbols
- Search the built-in chemical database by CAS number to auto-populate your label, then edit to meet your specific SDS
- Print any of the six template sizes



Learn more at Workstation.BradylD.com

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

BradyID.com/s36

Pre-Printed Right-To-Know Chemical Labels (B-595)

- Pre-printed labels result in 5-color chemical labels in a single print pass
- Indoor / outdoor grade vinyl withstands exposure to moisture, chemicals and handling

Service temp: -40° F to 180° F

Application temp: 0° F to 180° F

Average outdoor durability: 8 to 10 years

Agency approvals: **RoHS**



Fits Printers	Catalog #	B#	Legend	Label Height Inch (mm)	Label Width Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-244-595-NFPA	B-595		2.250 (57.5)	2.250 (57.5)	1	365	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-245-595-NFPA	B-595		2.250 (57.5)	4.000 (101.6)	1	240	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-263-595-NFPA	B-595		4.000 (101.6)	6.250 (158.8)	1	170	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-244-595-DIAM	B-595		2.250 (57.5)	2.250 (57.5)	1	365	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-161-595-DIAM	B-595		4.000 (101.6)	4.000 (101.6)	1	240	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-246-595-NFR	B-595		1.125 (28.6)	3.000 (76.2)	1	300	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-244-595-CB	B-595		2.250 (57.5)	2.250 (57.5)	1	365	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-245-595-CB	B-595		2.250 (57.5)	4.000 (101.6)	1	240	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-263-595-CB	B-595		4.000 (101.6)	6.250 (158.8)	1	170	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-244-595-HMIG	B-595		2.250 (57.5)	2.250 (57.5)	1	365	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-246-595-HMIG	B-595		1.125 (28.6)	3.000 (76.2)	1	300	B30-R10000

Labels above are not compatible with BradyPrinter S3000 or BBP30 printers.

Benchtop Printers

B30 / B33 Series

B30- and B33-Series Materials

BradyID.com/s36

Pre-Printed Pre-Cut Blank Sign Headers (B-595)

- Allows printer to create multicolor signs fast in a single print pass
- Headers meet NFPA 70E, OSHA 1910.145 and ASME/ANSI Z535 standards
- Indoor / outdoor grade vinyl conforms to rough, highly textured and difficult-to-adhere-to surfaces

Service temp: -40° F to 180° F
 Application temp: 0° F to 180° F
 Average outdoor durability: 8-10 years
 Agency approvals: **RoHS**




Figure 70




Figure 82



Blank rigid valve tags on page 38

Benchmark Printers

Fits Printers	Figure	Catalog #	B#	Header	Label Height A Inch (mm)	Label Width B Inch (mm)	Labels Per Roll	Rec. Ribbon
All*	Fig. 70	B30-241-595-OSHADA	B-595		2.250 (57.5)	3.000 (76.2)	300	B30-R10000
All*	Fig. 70	B30-25-595-OSHADA	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000
All*	Fig. 70	B30-241-595-OSHACA	B-595		2.250 (57.5)	3.000 (76.2)	300	B30-R10000
All*	Fig. 70	B30-25-595-OSHACA	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000
All*	Fig. 70	B30-241-595-ANSICA	B-595		2.250 (57.5)	3.000 (76.2)	300	B30-R10000
All*	Fig. 70	B30-25-595-ANSICA	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000
All*	Fig. 70	B30-241-595-ANSIDA	B-595		2.250 (57.5)	3.000 (76.2)	300	B30-R10000
All*	Fig. 70	B30-25-595-ANSIDA	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000
All*	Fig. 70	B30-241-595-ANSIWA	B-595		2.250 (57.5)	3.000 (76.2)	300	B30-R10000
All*	Fig. 70	B30-25-595-ANSIWA	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000
All*	Fig. 70	B30-241-595-ANSINO	B-595		2.250 (57.5)	3.000 (76.2)	300	B30-R10000
All*	Fig. 70	B30-25-595-ANSINO	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000
All*	Fig. 70	B30-25-595-PREC	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000
All*	Fig. 70	B30-25-595-PEL	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000
All*	Fig. 82	B30-242-595-BLNKWT	B-595		1.125 (28.6) **	2.750 (69.8)	300	B30-R10000
All*	Fig. 82	B30-241-595-BLNKWT	B-595		2.250 (57.5)	3.000 (76.2)	300	B30-R10000
All*	Fig. 82	B30-219-595-BLNKWT	B-595		2.250 (57.5) **	3.750 (95.3)	250	B30-R10000
All*	Fig. 82	B30-25-595-BLNKWT	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000
All*	Fig. 82	B30-241-595-BLNKYL	B-595		2.250 (57.5)	3.000 (76.2)	300	B30-R10000
All*	Fig. 82	B30-25-595-BLNKYL	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000

** Sized to fit blank rigid valve tags, see page 38.

Non-Adhesive Tags (B-551)

- Non-adhesive semi-rigid card stock in pre-cut or continuous styles
- Pre-cut style tags micro-perforated between tags to separate cleanly and feature chamfered corners
- Snap-in plastic grommets available for extra strength around mounting hole (Catalog #20596, 100/bag)

Service temp: -40° F to 193° F
 Average outdoor durability: Up to 2 years




Figure 3




Figure 69



B30 / B33 Series

Fits Printers	Figure	Catalog #	B#	Header	Tag Width A Inch (mm)	Tag Height B Inch (mm)	Tags Per Roll	Rec. Ribbon
All*	Fig. 69	B30-255-551-ANSIDA	B-551		3.250 (82.6)	5.750 (146.1)	100	B30-R10000
All*	Fig. 69	B30-255-551-OSHADA	B-551		3.250 (82.6)	5.750 (146.1)	100	B30-R10000
All*	Fig. 69	B30-255-551-ANSICA	B-551		3.250 (82.6)	5.750 (146.1)	100	B30-R10000
All*	Fig. 69	B30-255-551-WHT	B-551		3.250 (82.6)	5.750 (146.1)	100	B30-R10000
All*	Fig. 3	B30C-2500-551-WT	B-551		2.500 (63.5)	50 ft. (15.2 m)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-3250-551-WT	B-551		3.250 (82.6)	50 ft. (15.2 m)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-4250-551-WT	B-551		4.250 (107.9)	50 ft. (15.2 m)	1 roll (cont.)	B30-R10000

✕ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

BradyID.com/s36

ToughWash® Washdown Resistant Labels (B-854 and B-855)

- Withstands high pressure, heat, harsh chemicals and numerous washdown cycles
- Legible and long-lasting for even the toughest washdown cycles
- Ideal for use in the food and beverage industry
- B-854 offers metal detectable layer to allow detection in food stream

Service temp: -40° F to 230° F
Agency approvals: RoHS




Figure 3




Figure 73



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Length B Inch (mm)	Labels Per Roll	Rec. Ribbon
ToughWash Metal Detectable Material (B-854):								
All*	Fig. 3	B30C-4000-854-YL	B-854		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
All*	Fig. 3	B30C-4000-854-WT	B-854		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
All*	Fig. 73	B30-25-854-OSHADA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-854-ANSIWA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-854-ANSIDA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-854-ANSICA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-854-PEL	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-854-PREC	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
ToughWash Material (B-855):								
All*	Fig. 3	B30C-1125-855-YL	B-855		1.125 (28.6)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
All*	Fig. 3	B30C-2250-855-YL	B-855		2.250 (57.5)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
All*	Fig. 3	B30C-4000-855-YL	B-855		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
All*	Fig. 3	B30C-1125-855-WT	B-855		1.125 (28.6)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
All*	Fig. 3	B30C-2250-855-WT	B-855		2.250 (57.5)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
All*	Fig. 3	B30C-4000-855-WT	B-855		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
All*	Fig. 73	B30-25-855-OSHADA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-855-ANSIWA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-855-ANSIDA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-855-ANSICA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-855-PEL	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-855-PREC	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000

✕ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.




B30- and B33-Series Materials

BradyID.com/s36

Chemical and Solvent Resistant Polypropylene Labels (B-425, B-7425)

- Outstanding chemical and solvent resistance and print performance
- Not recommended for prolonged outdoor use

B-425: Service temp: -94° F to 212° F
 B-7425: Service temp: -320° F to 248° F
 Agency approvals:




Benchtop Printers

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 1	B33-5-425	B-425	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R4300
i3300, BBP33	Fig. 2	B33-17-425	B-425	White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-18-425	B-425	White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-19-425	B-425	White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R4300
i3300, BBP33	Fig. 25	B33-88-7425	B-7425	White	1.000 (25.4)	0.750 (19.1)	2	2000	B30-R4300
i3300, BBP33	Fig. 2	B33-179-7425	B-7425	White	1.000 (25.4)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 25	B33-37-7425	B-7425	White	1.500 (38.1)	0.500 (12.7)	2	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-136-7425	B-7425	White	1.500 (38.1)	0.750 (19.1)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-235-7425	B-7425	White	1.500 (38.1)	1.000 (25.4)	1	1250	B30-R4300
i3300, BBP33	Fig. 2	B33-258-7425	B-7425	White	1.500 (38.1)	1.750 (44.5)	1	900	B30-R4300
i3300, BBP33	Fig. 2	B33-53-7425	B-7425	White	2.000 (50.8)	0.500 (12.7)	1	2000	B30-R4300

Retro Reflective Tape (B-584)

- Highly reflective material shines back brightly when struck by light
- Ideal for labeling outdoor utility pedestals, hard hats, jobsite equipment and roof-top equipment
- Recommended for low light or inclement weather conditions

Service temp: -40° F to 158° F
 Application temp: 0° F to 158° F (yellow and orange), 50° F to 158° F (silver)
 Average outdoor durability: 4 to 6 years




B30 / B33 Series

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
All*	Fig. 3	B30C-1125-584-SL	B-584	Silver	1.125 (28.6)	50 (15.2)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-584-SL	B-584	Silver	2.250 (57.5)	50 (15.2)	1 roll (cont.)	B30-R10000
All* ✕	Fig. 3	B30C-4000-584-SL	B-584	Silver	4.000 (101.6)	50 (15.2)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-584-YL	B-584	Yellow	1.125 (28.6)	50 (15.2)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-584-YL	B-584	Yellow	2.250 (57.5)	50 (15.2)	1 roll (cont.)	B30-R10000
All* ✕	Fig. 3	B30C-4000-584-YL	B-584	Yellow	4.000 (101.6)	50 (15.2)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-584-OR	B-584	Orange	1.125 (28.6)	50 (15.2)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-584-OR	B-584	Orange	2.250 (57.5)	50 (15.2)	1 roll (cont.)	B30-R10000
All* ✕	Fig. 3	B30C-4000-584-OR	B-584	Orange	4.000 (101.6)	50 (15.2)	1 roll (cont.)	B30-R10000

BradyGlo™ High-Intensity Photoluminescent Tape (B-526)

- Designed for directional, evacuation and equipment marking. Ideal for marking emergency utility shut-offs, fire extinguishers, alarm pulls and vital equipment controls
- For glow-in-the-dark identification up to 10 hours
- Complies with indoor use requirements specified in RS 6-1 and 6-1A of New York Local Law 26

Service temp: -40° F to 140° F
 Application temp: 40° F to 140° F



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
All*	Fig. 3	B30C-1125-526	B-526	Luminous Green	1.125 (28.6)	50 (15.2)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-526	B-526	Luminous Green	2.250 (57.5)	50 (15.2)	1 roll (cont.)	B30-R10000
All* ✕	Fig. 3	B30C-4000-526	B-526	Luminous Green	4.000 (101.6)	50 (15.2)	1 roll (cont.)	B30-R10000

✕ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

Printable Magnetic Supply (B-509)

- Easiest and quickest material for removing and repositioning
- Non-adhesive magnetic material that can be printed on directly
- Ideal for reusable, repositionable and Lean / 5S identification applications

Service temp: 0° F to 158° F
Average outdoor durability: 3 to 5 years




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
All*	Fig. 3	B30C-2500-509-WT	B-509	White	2.500 (63.5)	25 (7.62)	1 roll (cont.)	B30-R10000
All* ✕	Fig. 3	B30C-4250-509-WT	B-509	White	4.250 (107.8)	25 (7.62)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2500-509-YL	B-509	Yellow	2.500 (63.5)	25 (7.62)	1 roll (cont.)	B30-R10000
All* ✕	Fig. 3	B30C-4250-509-YL	B-509	Yellow	4.250 (107.8)	25 (7.62)	1 roll (cont.)	B30-R10000

Repositionable Vinyl (B-581)

- Aggressive adhesive stays in place but removes cleanly without leaving adhesive residue
- Ideal for temporary, removable and repositionable labels, such as Lean / 5S inventory labels

Service temp: -40° F to 180° F
Application temp: 50° F to 180° F
Average outdoor durability: 5 years




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
All*	Fig. 3	B30C-500-581-WT	B-581	White	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-581-WT	B-581	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-581-WT	B-581	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✕	Fig. 3	B30C-4000-581-WT	B-581	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-581-YL	B-581	Yellow	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-581-YL	B-581	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-581-YL	B-581	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✕	Fig. 3	B30C-4000-581-YL	B-581	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000

Dissolvable Paper Labels (B-403)

- Designed for temporary applications where easy removal, re-identification or waste reduction are valued
- Ideal for labeling glassware, temporary asset tracking, animal housing identification and general use
- Completely dissolves in warm water within 30 seconds, leaving no adhesive residue

Service temp: -40° F to 172° F




Figure 3



Dissolves within 30 seconds leaving no residue.

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
All*	Fig. 3	B30C-1125-403-WT	B-403	White	1.125 (28.575)	100 (30.5)	1 (cont.)	B30-R4300
All*	Fig. 3	B30C-2250-403-WT	B-403	White	2.250 (57.15)	100 (30.5)	1 (cont.)	B30-R4300
All*	Fig. 3	B30C-3000-403-WT	B-403	White	3.000 (76.2)	100 (30.5)	1 (cont.)	B30-R4300
All*	Fig. 3	B30C-4000-403-WT	B-403	White	4.000 (101.6)	100 (30.5)	1 (cont.)	B30-R4300

✕ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

BradyID.com/s36

General ID Labels for Lean / 5S, Bins and Production Areas (B-483, B-484A, B-498, B-499 and B-595)

- Also ideal for marking backer board, DIN rail, relays, PLCs, switches, solenoids, drive motors and other components inside panels
- All recommended materials are flexible and have high-tack adhesives for adhesion to wide variety of surfaces and components

B-483: Service temp: -40° F to 248° F
 B-484A: Service temp: -40° F to 240° F
 B-498: Service temp: -40° F to 175° F
 B-499: Service temp: -40° F to 193° F
 B-595: Service temp: -40° F to 180° F

Agency approvals:
 Agency approvals:
 Agency approvals:
 Agency approvals:
 Agency approvals:




Figure 1




Figure 2




Figure 3



Benchmark Printers

B30 / B33 Series

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Vinyl cloth with ggressive but repositionable adhesive (B-498):									
i3300, BBP33	Fig. 1	B33-90-498	B-498	White	0.250 (6.4)	1.437 (36.5)	6	2500	B30-R6200
i3300, BBP33	Fig. 1	B33-68-498	B-498	White	0.500 (12.7)	0.750 (19.1)	4	5000	B30-R6200
i3300, BBP33	Fig. 1	B33-87-498	B-498	White	0.500 (12.7)	1.437 (36.5)	6	2500	B30-R6200
i3300, BBP33	Fig. 1	B33-1-498	B-498	White	0.750 (19.1)	0.250 (6.4)	4	5000	B30-R6200
i3300, BBP33	Fig. 1	B33-95-498	B-498	White	0.800 (20.3)	1.437 (36.5)	3	2300	B30-R6200
i3300, BBP33	Fig. 1	B33-5-498	B-498	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6200
i3300, BBP33	Fig. 1	B33-88-498	B-498	White	1.000 (25.4)	0.750 (19.1)	2	2500	B30-R6200
i3300, BBP33	Fig. 1	B33-89-498	B-498	White	1.000 (25.4)	1.437 (36.5)	3	2300	B30-R6200
S3000, S3100, i3300, BBP35, BBP37	Fig. 1	B30C-4000-498	B-498	White	4.000 (101.6)	80 ft. (24.4 m)	1 roll (cont.)		B30-R6200
Nylon Cloth with permanent adhesive (B-499):									
i3300, BBP33	Fig. 1	B33-68-499	B-499	White	0.500 (12.7)	0.750 (19.1)	4	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-165-499	B-499	White	0.800 (20.3)	1.437 (36.5)	4	2500	B30-R6000
i3300, BBP33	Fig. 2	B33-125-499	B-499	White	0.900 (22.9)	0.500 (12.7)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-163-499	B-499	White	1.000 (25.4)	0.375 (9.5)	1	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-152-499	B-499	White	1.000 (25.4)	0.375 (9.5)	2	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-136-499	B-499	White	1.500 (38.1)	0.750 (19.1)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-137-499	B-499	White	2.000 (50.8)	1.000 (25.4)	1	1100	B30-R6000
Polyester with ultra-aggressive adhesive for highly textured and low-surface energy surfaces (B-483):									
i3300, BBP33	Fig. 1	B33-149-483	B-483	White	0.500 (12.7)	0.500 (12.7)	4	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-5-483	B-483	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-17-483	B-483	White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-7-483	B-483	White	2.750 (69.9)	1.250 (31.8)	1	1000	B30-R6000
i3300, BBP33	Fig. 2	B33-18-483	B-483	White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-483	B-483	White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
i3300, BBP33	Fig. 2	B33-55-483	B-483	White	4.000 (101.6)	2.000 (50.8)	1	750	B30-R6000
Polyester with ultra-aggressive adhesive and pliable for conforming to angular surfaces (B-484A):									
i3300, BBP33	Fig. 2	B33-125-484	B-484A	White	0.900 (22.9)	0.500 (12.7)	1	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-5-484	B-484A	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-136-484	B-484A	White	1.500 (38.1)	0.750 (19.1)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-17-484	B-484A	White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-18-484	B-484A	White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-484	B-484A	White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
Continuous cut-to-length vinyl with permanent adhesive is conformable and indoor / outdoor grade (B-595):									
All*	Fig. 3	B30C-500-595-WT	B-595**	White	0.500 (12.7)	100 ft. (30.5m)	1 roll (cont.)		B30-R10000
All*	Fig. 3	B30C-1125-595-WT	B-595**	White	1.125 (28.6)	100 ft. (30.5m)	1 roll (cont.)		B30-R10000
All*	Fig. 3	B30C-500-595-YL	B-595**	Yellow	0.500 (12.7)	100 ft. (30.5m)	1 roll (cont.)		B30-R10000
All*	Fig. 3	B30C-1125-595-YL	B-595**	Yellow	1.125 (28.6)	100 ft. (30.5m)	1 roll (cont.)		B30-R10000

** Additional sizes and colors available for B-595 on page 40.

⊗ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP[®]30, BBP[®]31, BBP[®]33, BBP[®]35 and BBP[®]37 printers.

B30- and B33-Series Materials

BradyID.com/s36

Cold Temperature Application Material (B-549)

- Special adhesive permanently adheres to extremely cold surfaces
- Can be applied in -10° F and lasts in -40° F
- Ideal for cold storage warehouses, coolers, freezers and short-term winter outdoor use

Service temp: -40° F to 212° F

Average outdoor durability: Up to 1 year




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
All*	Fig. 3	B30C-1125-549-WT	B-549	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-549-WT	B-549	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✕	Fig. 3	B30C-4000-549-WT	B-549	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-549-YL	B-549	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-549-YL	B-549	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✕	Fig. 3	B30C-4000-549-YL	B-549	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000

ToughStripe® Printable Floor Marking Tape (B-483 with overlaminates)

- Revolutionary B-483 material has ultra-aggressive adhesive
- Each roll ships with a roll of clear overlaminates which must be applied over printed label for best performance

Service temp: -40° F to 248° F

Agency approvals:




Figure 3



For use with printer*	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-1125-483WT-KT	B-483	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-2250-483WT-KT	B-483	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-3000-483WT-KT	B-483	White	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37 ✕	Fig. 3	B30C-4000-483WT-KT	B-483	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-1125-483YL-KT	B-483	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-2250-483YL-KT	B-483	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-3000-483YL-KT	B-483	Yellow	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37 ✕	Fig. 3	B30C-4000-483YL-KT	B-483	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-1125-483RD-KT	B-483	Red	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-2250-483RD-KT	B-483	Red	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37 ✕	Fig. 3	B30C-4000-483RD-KT	B-483	Red	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-1125-483BL-KT	B-483	Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-2250-483BL-KT	B-483	Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37 ✕	Fig. 3	B30C-4000-483BL-KT	B-483	Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-1125-483GN-KT	B-483	Green	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-2250-483GN-KT	B-483	Green	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37 ✕	Fig. 3	B30C-4000-483GN-KT	B-483	Green	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-1125-483BK-KT	B-483	Black	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-2250-483BK-KT	B-483	Black	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37 ✕	Fig. 3	B30C-4000-483BK-KT	B-483	Black	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-1125-483OR-KT	B-483	Orange	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-2250-483OR-KT	B-483	Orange	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37 ✕	Fig. 3	B30C-4000-483OR-KT	B-483	Orange	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R6000

ToughStripe material is not compatible with BBP®30, BBP®33 and BBP®31 printers.

ToughStripe material also available as:

- Solid, striped and dashed tape
- Die-cut shape, numbers and letters

View page 295 for more additional products.

✕ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

BradyID.com/s36

Raised Profile - Engraved Plate Substitute Labels (B-593) Push Button Style

- High gloss, polyester label with thick raised profile and ultra-aggressive adhesive (0.70 mm thick)
- High-performance, low-cost substitute to engraved plates – costs up to 80% less
- 10-year outdoor durability rating
- On-demand labeling: prints out in fewer than 4 seconds
- 5 push button sizes (including keyed and non-keyed 22.5 mm and 30.5 mm hole diameters)

Service temp: -4° F to 212° F
Application temp: 50° F to 212° F
Agency approvals:




Figure 18a





Figure 18b
(without key hole)

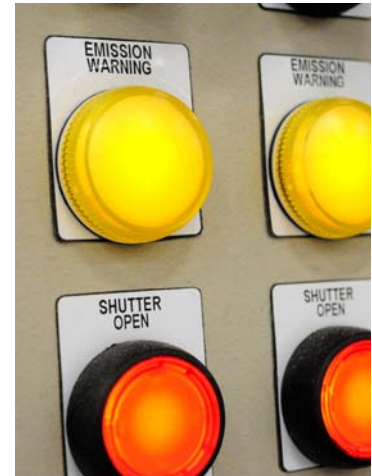

Benchmark Printers

B30 / B33 Series

Fits Printers	Figure	Catalog #	B#	Color	Label Height A Inch (mm)	Label Width B Inch (mm)	Hole Diameter C Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
All*	Fig. 18a	B30EP-167-593-WT	B-593	White	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R6000
All*	Fig. 18b	B30EP-167U-593-WT	B-593	White	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R6000
All*	Fig. 18a	B30EP-169-593-WT	B-593	White	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	1	190	B30-R6000
All*	Fig. 18a	B30EP-168-593-WT	B-593	White	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	1	180	B30-R6000
All*	Fig. 18a	B30EP-170-593-WT	B-593	White	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	1	145	B30-R6000
All*	Fig. 18a	B30EP-167-593-YL	B-593	Yellow	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R6000
All*	Fig. 18b	B30EP-167U-593-YL	B-593	Yellow	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R6000
All*	Fig. 18a	B30EP-169-593-YL	B-593	Yellow	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	1	190	B30-R6000
All*	Fig. 18a	B30EP-168-593-YL	B-593	Yellow	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	1	180	B30-R6000
All*	Fig. 18a	B30EP-170-593-YL	B-593	Yellow	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	1	145	B30-R6000
All*	Fig. 18a	B30EP-167-593-BK	B-593	Black	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R4400-WT
All*	Fig. 18b	B30EP-167U-593-BK	B-593	Black	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R4400-WT
All*	Fig. 18a	B30EP-169-593-BK	B-593	Black	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	1	190	B30-R4400-WT
All*	Fig. 18a	B30EP-168-593-BK	B-593	Black	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	1	180	B30-R4400-WT
All*	Fig. 18a	B30EP-170-593-BK	B-593	Black	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	1	145	B30-R4400-WT
All*	Fig. 18a	B30EP-167-593-GN	B-593	Green	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R4400-WT
All*	Fig. 18b	B30EP-167U-593-GN	B-593	Green	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R4400-WT
All*	Fig. 18a	B30EP-169-593-GN	B-593	Green	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	1	190	B30-R4400-WT
All*	Fig. 18a	B30EP-168-593-GN	B-593	Green	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	1	180	B30-R4400-WT
All*	Fig. 18a	B30EP-170-593-GN	B-593	Green	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	1	145	B30-R4400-WT
All*	Fig. 18a	B30EP-167-593-RD	B-593	Red	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R4400-WT
All*	Fig. 18b	B30EP-167U-593-RD	B-593	Red	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R4400-WT
All*	Fig. 18a	B30EP-169-593-RD	B-593	Red	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	1	190	B30-R4400-WT
All*	Fig. 18a	B30EP-168-593-RD	B-593	Red	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	1	180	B30-R4400-WT
All*	Fig. 18a	B30EP-170-593-RD	B-593	Red	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	1	145	B30-R4400-WT

U.S. Patent No. US8475914B2; US9005729B2.

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.