

Jobber Length Carbide Tipped Drill

Style

A160

	HSS HM
	DIN 338
	4XD
	118°
	ST
	3
	N
	A160
	4.00 - 16.00
	183
1.1	197E
1.2	197E
1.3	180D
1.4	164D
1.5	131C
1.6	121A
1.7	
1.8	
2.1	131B
2.2	115C
2.3	115A
2.4	
3.1	164C
3.2	131A
3.3	115A
3.4	98A
4.1	115A
4.2	115A
4.3	82A
5.1	98A
5.2	82A
5.3	66A
6.1	180D
6.2	230G
6.3	197C
6.4	164C
7.1	164I
7.2	148H
7.3	131G
7.4	115F
8.1	
8.2	197E
8.3	
9.1	30C
10.1	

How To Use This Chart:

1. Determine your Workpiece Material from the Application Material Groups (AMG) below.
2. Use the Icons to find Product Features.
3. Find the Surface Feet Per Minute (SFM) and Alpha Code

example: 361W

361 = SFM

W = Alpha Code used to find your Feed Rate

Feed Rate Chart

Alpha Code	Feed in Inches per Revolution (IPR) ± 25%															Ø Diameter				
	1mm/ 1/32"	2mm/ 3/32"	3mm/ 1/8"	4mm/ 5/32"	5mm/ 3/16"	6mm/ 1/4"	8mm/ 5/16"	10mm/ 3/8"	12mm/ 1/2"	15mm/ 9/16"	16mm/ 5/8"	20mm/ 3/4"	25mm/ 1"	30mm/ 1.1/8"	40mm/ 1.5/8"	50mm/ 2"				
A	0.0004	0.0009	0.0011	0.0013	0.0014	0.0017	0.0021	0.0024	0.0027	0.0032	0.0034	0.0043	0.0049	0.0053	0.0061	0.0069				
B	0.0006	0.0011	0.0015	0.0016	0.0018	0.0021	0.0026	0.0031	0.0035	0.0041	0.0043	0.0053	0.0060	0.0065	0.0074	0.0082				
C	0.0006	0.0013	0.0017	0.0020	0.0022	0.0025	0.0031	0.0039	0.0043	0.0049	0.0051	0.0063	0.0071	0.0077	0.0087	0.0094				
D	0.0006	0.0015	0.0021	0.0024	0.0027	0.0031	0.0039	0.0047	0.0051	0.0059	0.0061	0.0074	0.0083	0.0090	0.0100	0.0108				
E	0.0007	0.0017	0.0024	0.0028	0.0031	0.0037	0.0045	0.0055	0.0059	0.0068	0.0071	0.0085	0.0094	0.0102	0.0112	0.0122				
F	0.0007	0.0020	0.0029	0.0033	0.0037	0.0043	0.0054	0.0065	0.0070	0.0080	0.0083	0.0098	0.0108	0.0116	0.0126	0.0135				
G	0.0007	0.0022	0.0033	0.0038	0.0043	0.0050	0.0063	0.0075	0.0081	0.0091	0.0094	0.0110	0.0122	0.0130	0.0140	0.0148				
H	0.0008	0.0026	0.0040	0.0046	0.0051	0.0059	0.0075	0.0090	0.0096	0.0107	0.0110	0.0126	0.0140	0.0148	0.0157	0.0165				
I	0.0008	0.0030	0.0047	0.0053	0.0059	0.0068	0.0087	0.0104	0.0110	0.0122	0.0126	0.0142	0.0157	0.0165	0.0173	0.0181				
J	0.0009	0.0033	0.0053	0.0060	0.0067	0.0078	0.0098	0.0117	0.0124	0.0137	0.0142	0.0159	0.0175	0.0183	0.0191	0.0198				
K	0.0010	0.0036	0.0059	0.0067	0.0075	0.0087	0.0110	0.0130	0.0138	0.0153	0.0157	0.0177	0.0193	0.0201	0.0209	0.0215				
L	0.0011	0.0040	0.0065	0.0073	0.0082	0.0094	0.0120	0.0142	0.0152	0.0165	0.0169	0.0191	0.0207	0.0215	0.0224	0.0231				
M	0.0012	0.0043	0.0071	0.0080	0.0089	0.0102	0.0130	0.0154	0.0165	0.0177	0.0181	0.0205	0.0220	0.0228	0.0238	0.0248				
N	0.0013	0.0047	0.0077	0.0086	0.0095	0.0110	0.0140	0.0165	0.0179	0.0189	0.0193	0.0219	0.0234	0.0242	0.0253	0.0265				
S	0.0003	0.0006	0.0008	0.0010	0.0012	0.0015	0.0020	0.0031	0.0039	0.0048	0.0051	0.0059	0.0070	0.0070	0.0090					
T	0.0006	0.0011	0.0016	0.0020	0.0024	0.0028	0.0035	0.0043	0.0051	0.0063	0.0067	0.0075	0.0080	0.0090	0.0100					
U	0.0010	0.0019	0.0028	0.0031	0.0035	0.0042	0.0055	0.0067	0.0079	0.0088	0.0091	0.0094	0.0110	0.0120	0.0140					
V	0.0015	0.0027	0.0039	0.0045	0.0051	0.0060	0.0079	0.0098	0.0110	0.0122	0.0126	0.0134	0.0160	0.0170	0.0200					
W	0.0019	0.0035	0.0051	0.0059	0.0067	0.0079	0.0102	0.0130	0.0150	0.0165	0.0169	0.0177	0.0190	0.0190	0.0200					
X	0.0022	0.0041	0.0059	0.0071	0.0083	0.0098	0.0130	0.0165	0.0189	0.0210	0.0217	0.0228								
Y	0.0027	0.0049	0.0071	0.0087	0.0102	0.0125	0.0169	0.0217	0.0276	0.0276	0.0276	0.0291								
Z	0.0037	0.0068	0.0098	0.0128	0.0157	0.0210	0.0315	0.0394	0.0433	0.0463	0.0472	0.0472								

How To Use This Chart to Find Cutting Feed Rate (IPR):

1. Find your Alpha Code on the AMG Chart (example: 279 U : U is the Alpha Code)
2. Find the closest diameter for your cutting application on the chart to find your IPR

Application Material Groups (AMG)		Hardness HRC	ISO
1. Steel	1.1 Magnetic soft steel	12L14, 12L15	<120 HB P 1
	1.2 Structural Steel/ case carburising steel	1005-1025, 1214, 1215, A36	<200 HB P 1
	1.3 Plain Carbon steel	1030-1060, 1050-1060, 1144-1146	<24 P 2
	1.4 Alloy steel	4140,4340,52100,8620 H11-H41,A2,D2,01,P20,420	<24 P 3
	1.5 Alloy steel/ Hardened and tempered steel	4140,4340,52100,8620 H11-H41,A2,D2,01,P20,420	>24<38 P 4
	1.6 Alloy steel/ Hardened and tempered steel	4140,4340,52100,8620 H11-H41,A2,D2,01,P20,420	>38 H 1
	1.7 Alloy steel Hardened	A2-D2, H10-H41, L1-L6, M1-M42, T1	49-55 H 3
	1.8 Alloy steel Hardened	A2-D2, H10-H41, L1-L6, M1-M42, T1	55-63 H 4
2. Stainless Steel	2.1 Free machining Stainless Steel	200, 303, 416, 420F, 430F, 440	<24 M 1
	2.2 Austenitic	301, 302, 304, 316, 321, 330, CUSTOM 455, AM-350	<24 M 3
	2.3 Ferritic + Austenitic, Martensitic	318-329, 400-446, DUPLEX	<32 M 2
	2.4 Precipitation Hardened	15-5PH, Custom 450 17-4PH	<32 S 2
3. Cast Iron	3.1 Lamellar graphite	Grey, G10, Gg40, J431C, A48 CLASS 20	<150 HB K 1
	3.2 Lamellar graphite	Grey, GG25-Gg40, J158, A48 CLASS 40-60	>150 HB<32 K 2
	3.3 Nodular graphite/ Malleable Cast Iron	A220, A436, A439, A602, Black, GGG40-GGG70	<200 HB K 3
	3.4 Nodular graphite/ Malleable Cast Iron	Black Gts/Gtw, J434C	>200 HB<32 K 4
4. Titanium	4.1 Titanium, unalloyed	Commercially Pure	<200 HB S 1
	4.2 Titanium, alloyed	6Al4V, 6A14V-2Sn, Monel, Monel K	<28 S 2
	4.3 Titanium, alloyed	6Al4V-4Mo, 7A14V-4Mo, 4911-4967	>28<38 S 3
5. Nickel	5.1 Nickel, unalloyed	Commercially Pure, 17644, 200, 5553	<150 HB S 1
	5.2 Nickel, alloyed	Monel 400, Hastelloy C, Inconel 625, Waspaloy	<28 S 2
	5.3 Nickel, alloyed	Inconel 718, Nimonic 75-95, Rene 41, Inconel 825, A286	>28<38 S 3
6. Copper	6.1 Copper	Commercially Pure	<100 HB N 3
	6.2 β-Brass, Bronze	314-340, 350-370	<200 HB N 4
	6.3 α-Brass	Alloyed Cu + Al + Fe, Long Chipping	<200 HB N 3
	6.4 High Strength Bronze	Ampco 18-25	<49 N 4
7. Aluminium Magnesium	7.1 Al, Mg, unalloyed	Commercially Pure	<100 HB N 1
	7.2 Al alloyed, Si<0.5%	6061 T6, 7075, 314-340	<150 HB N 1
	7.3 Al alloyed, Si>0.5%<10%	6061 T6, 380-390	<120 HB N 1
	7.4 Al alloyed, Si>10% Mg alloys	Magnesium Whisker Reinforced	<120 HB N 2
8. Synthetic Materials	8.1 Thermoplastics	Ultradim, Polystrol	---
	8.2 Thermosetting plastics	Bakelit, Pertinax	---
	8.3 Reinforced plastic materials	CFK, GFKAFK	---
9. Hard Mat.	9.1 Cermets (Metal-ceramics)	Ferrotic	<54 H
10. Graphite	10.1 Standard graphite	---	O

SPECIAL PURPOSE DRILL



Jobber Length Carbide Tipped

A160 Heavy-Duty Brazed Carbide Tipped for abrasive materials or non-ferrous materials.

A160

DIN
338


4XD

HSS
HM

118°



4.00 - 16.00

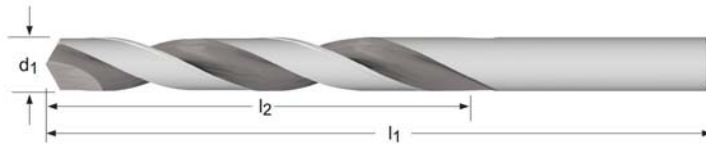

d_1 $\varnothing h_8$ mm	d_1 decimal Inch	l_2 mm	l_1 mm	Pack Qty	A160
4.00	0.1575	43	75	1	0029725
4.50	0.1772	47	80	1	0029732
5.00	0.1969	52	86	1	0029749
5.50	0.2165	57	93	1	0029756
6.00	0.2362	57	93	1	0029763
6.50	0.2559	63	101	1	0029770
6.80	0.2677	69	109	1	0029787
7.00	0.2756	69	109	1	0029794
7.50	0.2953	69	109	1	0029800
8.00	0.3150	75	117	1	0029817
8.50	0.3346	75	117	1	0029824
9.00	0.3543	81	125	1	0029831
9.50	0.3740	81	125	1	0029848
10.00	0.3937	87	133	1	0029626
10.20	0.4016	87	133	1	0029633
10.50	0.4134	87	133	1	0029640
11.00	0.4331	94	142	1	0029657
11.50	0.4528	94	142	1	0029664
12.00	0.4724	101	151	1	0029671
13.00	0.5118	101	151	1	0029688
14.00	0.5512	108	160	1	0029695
15.00	0.5906	114	169	1	0029701
16.00	0.6299	120	178	1	0029718