
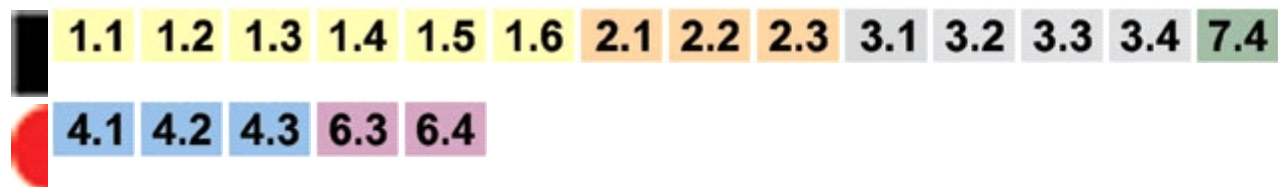



## PFX

## A941

PFX Long Series Drill

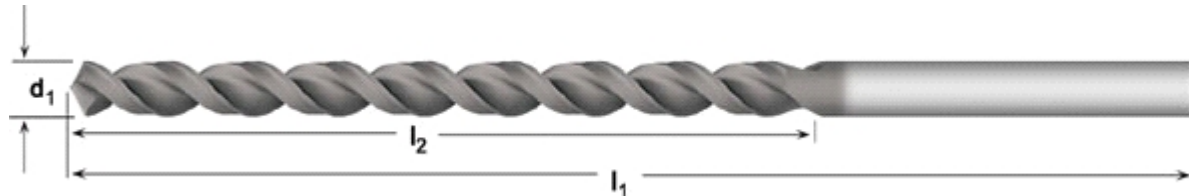

$d_1$ R <sub>h8</sub> Inch	$d_1$ R <sub>h8</sub> mm	$d_1$ decimal Inch	$l_2$ mm	$l_1$ mm	e-code	USD
	1.00	0.0394	33	56	A9411.0	29.65
3/64	1.19	0.0469	29	57	A9413/64	29.65
	1.50	0.0591	45	70	A9411.5	26.45
1/16	1.59	0.0625	44	76	A9411/16	26.45
5/64	1.98	0.0781	51	95	A9415/64	26.45
	2.00	0.0787	56	85	A9412.0	21.10
3/32	2.38	0.0938	57	108	A9413/32	21.10
	2.50	0.0984	62	95	A9412.5	21.10
7/64	2.78	0.1094	64	117	A9417/64	21.10
	3.00	0.1181	66	100	A9413.0	21.10
	3.10	0.1220	69	106	A9413.1	25.00
1/8	3.18	0.1250	70	130	A9411/8	25.00
	3.20	0.1260	69	106	A9413.2	23.50
	3.30	0.1299	69	106	A9413.3	26.45
	3.40	0.1339	73	112	A9413.4	25.55
	3.50	0.1378	73	112	A9413.5	24.75
9/64	3.57	0.1406	76	137	A9419/64	24.75
	3.60	0.1417	73	112	A9413.6	24.55
	3.70	0.1457	73	112	A9413.7	29.65
	3.80	0.1496	78	119	A9413.8	27.40
	3.90	0.1535	78	119	A9413.9	25.15
5/32	3.97	0.1563	76	137	A9415/32	25.15
	4.00	0.1575	78	119	A9414.0	26.05
	4.10	0.1614	78	119	A9414.1	34.35
	4.20	0.1654	78	119	A9414.2	28.75
	4.30	0.1693	82	126	A9414.3	30.95
11/64	4.37	0.1719	86	146	A94111/64	30.95

d <sub>1</sub> R <sub>h</sub> <sub>8</sub> Inch	d <sub>1</sub> R <sub>h</sub> <sub>8</sub> mm	d <sub>1</sub> decimal Inch	l <sub>2</sub> mm	l <sub>1</sub> mm	e-code	USD
	4.40	0.1732	82	126	A9414.4	31.90
	4.50	0.1772	82	126	A9414.5	30.65
	4.60	0.1811	82	126	A9414.6	33.35
	4.70	0.1850	82	126	A9414.7	35.80
3/16	4.76	0.1875	86	146	A9413/16	35.80
	4.80	0.1890	87	132	A9414.8	36.60
	4.90	0.1929	87	132	A9414.9	36.80
	5.00	0.1969	87	132	A9415.0	31.40
	5.10	0.2008	87	132	A9415.1	39.45
13/64	5.16	0.2031	92	152	A94113/64	39.45
	5.20	0.2047	87	132	A9415.2	37.35
	5.30	0.2087	87	132	A9415.3	40.40
	5.40	0.2126	91	139	A9415.4	33.90
	5.50	0.2165	91	139	A9415.5	37.75
7/32	5.56	0.2188	92	152	A9417/32	37.75
	5.60	0.2205	91	139	A9415.6	41.35
	5.70	0.2244	91	139	A9415.7	37.20
	5.80	0.2283	91	139	A9415.8	37.90
	5.90	0.2323	91	139	A9415.9	42.45
15/64	5.95	0.2344	95	156	A94115/64	42.45
	6.00	0.2362	91	139	A9416.0	38.55
	6.10	0.2402	97	148	A9416.1	46.25
	6.20	0.2441	97	148	A9416.2	45.70
	6.30	0.2480	97	148	A9416.3	46.00
1/4	6.35	0.2500	95	156	A9411/4	46.00
	6.40	0.2520	97	148	A9416.4	54.60
	6.50	0.2559	97	148	A9416.5	43.20
	6.60	0.2598	97	148	A9416.6	48.50
	6.70	0.2638	97	148	A9416.7	57.60
17/64	6.75	0.2656	98	159	A94117/64	57.60
	6.80	0.2677	102	156	A9416.8	53.20
	6.90	0.2717	102	156	A9416.9	57.80
	7.00	0.2756	102	156	A9417.0	57.90
	7.10	0.2795	102	156	A9417.1	95.90
9/32	7.14	0.2813	98	159	A9419/32	95.90
	7.20	0.2835	102	156	A9417.2	85.50
	7.30	0.2874	102	156	A9417.3	88.10
	7.40	0.2913	102	156	A9417.4	98.80
	7.50	0.2953	102	156	A9417.5	57.30
19/64	7.54	0.2969	102	162	A94119/64	57.30
	7.60	0.2992	109	165	A9417.6	84.30
	7.70	0.3031	109	165	A9417.7	78.40
	7.80	0.3071	109	165	A9417.8	68.30
	7.90	0.3110	109	165	A9417.9	63.90
5/16	7.94	0.3125	102	162	A9415/16	63.90
	8.00	0.3150	109	165	A9418.0	54.60

d <sub>1</sub> R <sub>h8</sub> Inch	d <sub>1</sub> R <sub>h8</sub> mm	d <sub>1</sub> decimal Inch	l <sub>2</sub> mm	l <sub>1</sub> mm	e-code		USD
	8.10	0.3189	109	165	A9418.1		81.30
	8.20	0.3228	109	165	A9418.2		76.40
	8.30	0.3268	109	165	A9418.3		77.80
21/64	8.33	0.3281	105	165	A94121/64		77.80
	8.40	0.3307	109	165	A9418.4		72.60
	8.50	0.3346	109	165	A9418.5		65.80
	8.60	0.3386	115	175	A9418.6		100.00
	8.70	0.3425	115	175	A9418.7		95.90
11/32	8.73	0.3438	105	165	A94111/32		95.90
	8.80	0.3465	115	175	A9418.8		96.00
	8.90	0.3504	115	175	A9418.9		96.00
	9.00	0.3543	115	175	A9419.0		71.20
	9.10	0.3583	115	175	A9419.1		101.00
23/64	9.13	0.3594	108	171	A94123/64		101.00
	9.20	0.3622	115	175	A9419.2		113.00
	9.30	0.3661	115	175	A9419.3		121.00
	9.40	0.3701	115	175	A9419.4		123.00
	9.50	0.3740	115	175	A9419.5		82.00
3/8	9.52	0.3750	108	171	A9413/8		82.00
	9.60	0.3780	121	184	A9419.6	1)	119.00
	9.70	0.3819	121	184	A9419.7	1)	114.00
	9.80	0.3858	121	184	A9419.8	1)	107.00
	9.90	0.3898	121	184	A9419.9	1)	104.00
25/64	9.92	0.3906	111	178	A94125/64	1)	104.00
	10.00	0.3937	121	184	A94110.0	1)	84.40
	10.20	0.4016	121	184	A94110.2	1)	118.00
	10.30	0.4055	121	184	A94110.3	1)	148.00
13/32	10.32	0.4063	111	178	A94113/32	1)	148.00
	10.50	0.4134	121	184	A94110.5	1)	104.00
27/64	10.72	0.4219	117	184	A94127/64	1)	104.00
	11.00	0.4331	128	195	A94111.0	1)	114.00
7/16	11.11	0.4375	117	184	A9417/16	1)	114.00
	11.20	0.4409	128	195	A94111.2	1)	155.00
	11.50	0.4528	128	195	A94111.5	1)	123.00
29/64	11.51	0.4531	121	190	A94129/64	1)	123.00
	11.80	0.4646	128	195	A94111.8	1)	163.00
15/32	11.91	0.4688	121	190	A94115/32	1)	163.00
	12.00	0.4724	134	205	A94112.0	1)	135.00
	12.20	0.4803	134	205	A94112.2	1)	176.00
31/64	12.30	0.4844	121	197	A94131/64	1)	176.00
	12.50	0.4921	134	205	A94112.5	1)	148.00
1/2	12.70	0.5000	121	197	A9411/2	1)	148.00
	13.00	0.5118	134	205	A94113.0	1)	152.00

d <sub>1</sub> R <sub>h</sub> <sub>8</sub> Inch	d <sub>1</sub> R <sub>h</sub> <sub>8</sub> mm	d <sub>1</sub> decimal Inch	l <sub>2</sub> mm	l <sub>1</sub> mm	e-code		USD
33/64	13.10	0.5156	121	203	A94133/64	1)	152.00
	13.50	0.5315	140	214	A94113.5	1)	214.00
35/64	13.89	0.5469	124	210	A94135/64	1)	214.00
	14.00	0.5512	140	214	A94114.0	1)	218.00
9/16	14.29	0.5625	124	210	A9419/16	1)	218.00
	14.50	0.5709	144	220	A94114.5	1)	261.00
37/64	14.68	0.5781	124	222	A94137/64	1)	261.00
	15.00	0.5906	144	220	A94115.0	1)	269.00
19/32	15.08	0.5938	124	222	A94119/32	1)	269.00
39/64	15.48	0.6094	124	222	A94139/64	1)	269.00
	15.50	0.6102	149	227	A94115.5	1)	330.00
5/8	15.88	0.6250	124	222	A9415/8	1)	330.00
	16.00	0.6299	149	227	A94116.0	1)	316.00

<sup>1)</sup>Not able to achieve 10xD