
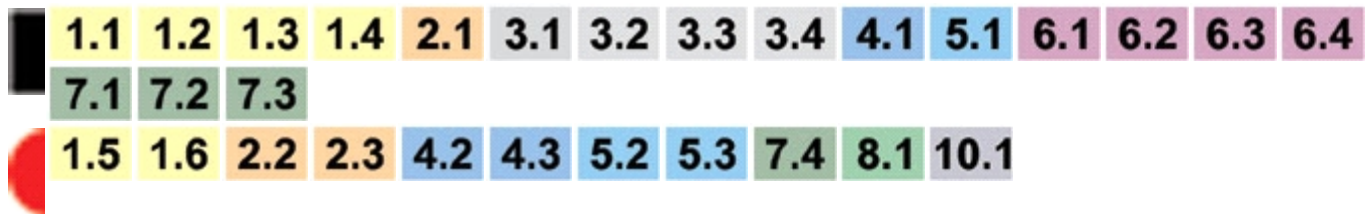


C810

T-slot Cutter

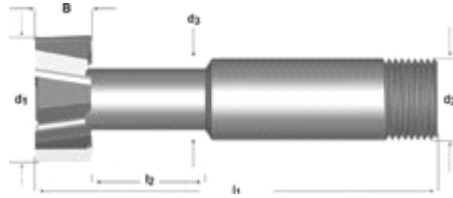

B	B	d ₁	d ₁	T	d ₃	l ₂	l ₁	d ₂	d ₂	z	e-code	USD
Inch	mm	Ř	Ř	DIN650	Ř	mm	mm	Ř0,-0.0 25 Inch	Ř0,-0.0 25 mm			
	6.00		12.50	6.0	5.00	11	57.0		10.0	6	C8106.0	85.50
1/4	6.35	37/64	14.68	1/4	6.35	14	60.5	1/2	12.7	6	C8101/4	¹⁾ 207.00
	8.00		16.00	8.0	7.00	13	61.0		10.0	6	C8108.0	112.00
5/16	7.94	45/64	17.86	5/16	7.15	17	65.0	1/2	12.7	6	C8105/16	¹⁾ 231.00
	8.00		18.00	10.0	8.00	17	65.0		12.0	6	C81010.0	126.00
	9.00		21.00	12.0	10.00	20	69.0		12.0	6	C81012.0	149.00
23/64	9.13	53/64	21.03	3/8	8.75	19	68.5	1/2	12.7	6	C8103/8	¹⁾ 272.00
27/64	10.72	61/64	24.21	7/16	9.50	22	73.0	1/2	12.7	6	C8107/16	¹⁾ 282.00
	11.00		25.00	14.0	12.00	23	79.0		16.0	6	C81014.0	177.00
15/32	11.91	1.5/64	27.38	1/2	11.90	24	76.0	1/2	12.7	6	C8101/2	¹⁾ 302.00
	12.00		28.00	16.0	13.00	23	76.0		16.0	6	C81016.0	192.00
	14.00		32.00	18.0	15.00	27	98.0		25.0	8	C81018.0	231.00
	16.00		36.00	20.0	17.00	30	100.0		25.0	8	C81020.0	368.00
	18.00		40.00	22.0	19.00	33	108.0		25.0	8	C81022.0	479.00

¹⁾Standard - BS 122/4