
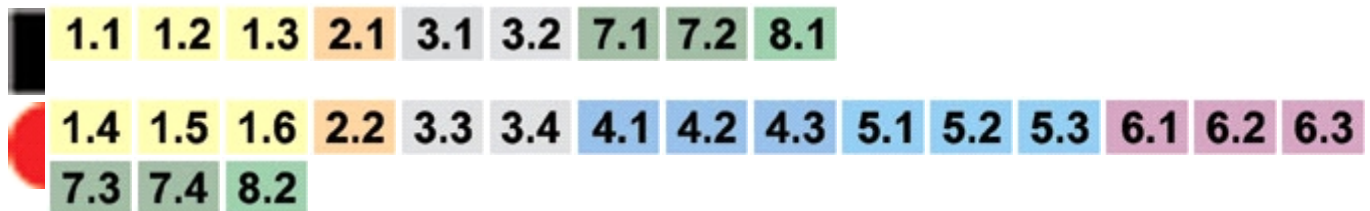


G125

Counterbore - 180°

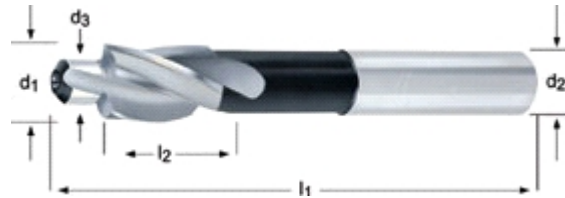

d ₁ Rz ₉ mm	d ₃ R _{e8} mm	M	l ₁ mm	l ₂ mm	d ₂ R _{h9} mm	z	e-code		USD
6.5	2.5	M 3 t	71	14	5.0	3	G1256.5X2.5	¹⁾	31.60
6.5	3.2	M 3 f	71	14	5.0	3	G1256.5X3.2	²⁾	31.60
6.5	3.4	M 3 m	71	14	5.0	3	G1256.5X3.4	³⁾	31.60
8.0	3.3	M 4 t	71	14	5.0	3	G1258.0X3.3	¹⁾	29.45
8.0	4.3	M 4 f	71	14	5.0	3	G1258.0X4.3	²⁾	29.45
8.0	4.5	M 4 m	71	14	5.0	3	G1258.0X4.5	³⁾	29.45
10.0	4.2	M 5 t	80	18	8.0	3	G12510.0X4.2	¹⁾	31.70
10.0	5.3	M 5 f	80	18	8.0	3	G12510.0X5.3	²⁾	31.70
10.0	5.5	M 5 m	80	18	8.0	3	G12510.0X5.5	³⁾	31.70
11.0	5.0	M 6 t	80	18	8.0	3	G12511.0X5.0	¹⁾	33.65
11.0	6.4	M 6 f	80	18	8.0	3	G12511.0X6.4	²⁾	33.65
11.0	6.6	M 6 m	80	18	8.0	3	G12511.0X6.6	³⁾	33.65
15.0	6.8	M 8 t	100	22	12.5	3	G12515.0X6.8	¹⁾	54.40
15.0	8.4	M 8 f	100	22	12.5	3	G12515.0X8.4	²⁾	54.40
15.0	9.0	M 8 m	100	22	12.5	3	G12515.0X9.0	³⁾	54.40
18.0	8.5	M 10 t	100	22	12.5	3	G12518.0X8.5	¹⁾	66.10
18.0	10.5	M 10 f	100	22	12.5	3	G12518.0X10.5	²⁾	66.10
18.0	11.0	M 10 m	100	22	12.5	3	G12518.0X11.0	³⁾	66.10
20.0	10.2	M 12 t	100	22	12.5	3	G12520.0X10.2	¹⁾	70.30
20.0	13.0	M 12 f	100	22	12.5	3	G12520.0X13.0	²⁾	70.30
20.0	13.5	M 12 m	100	22	12.5	3	G12520.0X13.5	³⁾	70.30

¹⁾t= for tap hole

²⁾f= for through hole fine

³⁾m= for through hole medium