


B180

NC - Reamer for High Precision Chucks

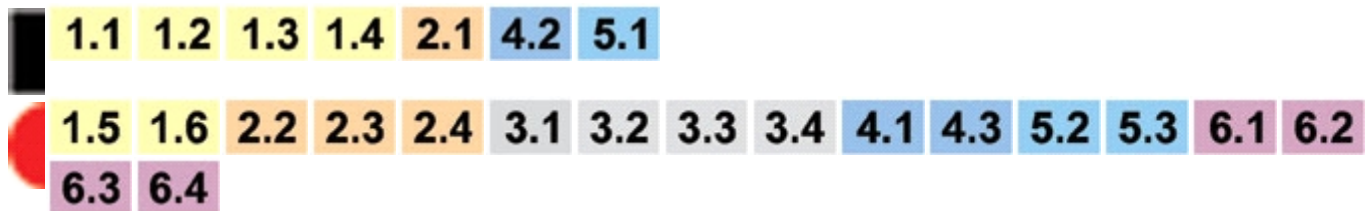

d ₁ R mm	l ₁ mm	l ₂ mm	l ₃ mm	z	d ₂ R _{h6} mm	e-code	USD
1.5	40	8	18	3	2	B1801.5	41.55
1.6	43	9	20	3	2	B1801.6	46.55
1.7	43	9	20	3	2	B1801.7	46.55
1.8	46	10	22	4	2	B1801.8	46.55
1.9	46	10	22	4	2	B1801.9	46.55
2.0	49	11	24	4	2	B1802.0	39.95
2.1	49	11	24	4	2	B1802.1	48.60
2.2	53	12	26	4	3	B1802.2	48.60
2.3	53	12	26	4	3	B1802.3	48.60
2.4	57	14	28	4	3	B1802.4	48.60
2.5	57	14	28	4	3	B1802.5	39.95
2.6	57	14	28	4	3	B1802.6	51.90
2.7	61	15	32	6	3	B1802.7	51.90
2.8	61	15	32	6	3	B1802.8	51.90
2.9	61	15	32	6	3	B1802.9	51.90
3.0	61	15	32	6	3	B1803.0	36.75
3.1	65	16	35	6	4	B1803.1	48.60
3.2	65	16	35	6	4	B1803.2	48.60
3.3	65	16	35	6	4	B1803.3	48.60
3.4	70	18	40	6	4	B1803.4	48.60
3.5	70	18	40	6	4	B1803.5	43.35
3.6	70	18	40	6	4	B1803.6	54.00
3.7	70	18	40	6	4	B1803.7	54.00
3.8	75	19	43	6	4	B1803.8	54.00
3.9	75	19	43	6	4	B1803.9	39.05
4.0	75	19	43	6	4	B1804.0	39.95

d ₁ R mm	l ₁ mm	l ₂ mm	l ₃ mm	z	d ₂ R _{h6} mm	e-code	USD
4.1	75	19	43	6	4	B1804.1	50.70
4.2	75	19	43	6	4	B1804.2	50.70
4.3	80	21	47	6	5	B1804.3	50.70
4.4	80	21	47	6	5	B1804.4	50.70
4.5	80	21	47	6	5	B1804.5	43.35
4.6	80	21	47	6	5	B1804.6	55.10
4.7	80	21	47	6	5	B1804.7	55.10
4.8	86	23	52	6	5	B1804.8	55.10
4.9	86	23	52	6	5	B1804.9	55.10
5.0	86	23	52	6	5	B1805.0	41.55
5.1	86	23	52	6	5	B1805.1	55.10
5.2	86	23	52	6	5	B1805.2	55.10
5.3	86	23	52	6	5	B1805.3	55.10
5.4	93	26	57	6	6	B1805.4	55.10
5.5	93	26	57	6	6	B1805.5	50.70
5.6	93	26	57	6	6	B1805.6	55.10
5.7	93	26	57	6	6	B1805.7	55.10
5.8	93	26	57	6	6	B1805.8	55.10
5.9	93	26	57	6	6	B1805.9	55.10
6.0	93	26	57	6	6	B1806.0	44.30
6.1	101	28	63	6	6	B1806.1	55.10
6.2	101	28	63	6	6	B1806.2	55.10
6.3	101	28	63	6	6	B1806.3	55.10
6.4	101	28	63	6	6	B1806.4	55.10
6.5	101	28	63	6	6	B1806.5	52.90
6.6	101	28	63	6	6	B1806.6	55.10
6.7	101	28	63	6	6	B1806.7	55.10
6.8	109	31	69	6	8	B1806.8	55.10
6.9	109	31	69	6	8	B1806.9	55.10
7.0	109	31	69	6	8	B1807.0	52.90
7.1	109	31	69	6	8	B1807.1	61.60
7.2	109	31	69	6	8	B1807.2	61.60
7.3	109	31	69	6	8	B1807.3	61.60
7.4	109	31	69	6	8	B1807.4	61.60
7.5	109	31	69	6	8	B1807.5	60.50
7.6	117	33	75	6	8	B1807.6	65.00
7.7	117	33	75	6	8	B1807.7	65.00
7.8	117	33	75	6	8	B1807.8	65.00
7.9	117	33	75	6	8	B1807.9	65.00
8.0	117	33	75	6	8	B1808.0	55.10
8.1	117	33	75	6	8	B1808.1	75.70
8.2	117	33	75	6	8	B1808.2	75.70
8.3	117	33	75	6	8	B1808.3	75.70
8.4	117	33	75	6	8	B1808.4	75.70
8.5	117	33	75	6	8	B1808.5	69.10
8.6	125	36	81	6	10	B1808.6	70.40

d ₁ R mm	l ₁ mm	l ₂ mm	l ₃ mm	z	d ₂ R _{h₆} mm	e-code	USD
8.7	125	36	81	6	10	B1808.7	70.40
8.8	125	36	81	6	10	B1808.8	70.40
8.9	125	36	81	6	10	B1808.9	70.40
9.0	125	36	81	6	10	B1809.0	63.80
9.1	125	36	81	6	10	B1809.1	72.50
9.2	125	36	81	6	10	B1809.2	72.50
9.3	125	36	81	6	10	B1809.3	72.50
9.4	125	36	81	6	10	B1809.4	72.50
9.5	125	36	81	6	10	B1809.5	71.30
9.6	133	38	87	6	10	B1809.6	74.50
9.7	133	38	87	6	10	B1809.7	74.50
9.8	133	38	87	6	10	B1809.8	74.50
9.9	133	38	87	6	10	B1809.9	74.50
10.0	133	38	87	6	10	B18010.0	65.00
11.0	142	41	96	6	10	B18011.0	92.00
12.0	151	44	105	6	10	B18012.0	95.20
13.0	151	44	105	6	10	B18013.0	106.00
14.0	160	47	110	8	14	B18014.0	110.00
15.0	162	50	112	8	14	B18015.0	112.00
16.0	170	52	120	8	14	B18016.0	116.00
17.0	175	54	123	8	14	B18017.0	139.00
18.0	182	56	130	8	14	B18018.0	146.00
19.0	189	58	131	8	16	B18019.0	167.00
20.0	195	60	137	8	16	B18020.0	162.00