

Feed Rate Chart

Alpha Code	Feed in Inches per Revolution (IPR) ± 25%															Ø Diameter				
	1mm/ 1/32"	2mm/ 3/32"	3mm/ 1/8"	4mm/ 5/32"	5mm/ 3/16"	6mm/ 1/4"	8mm/ 5/16"	10mm/ 3/8"	12mm/ 1/2"	15mm/ 9/16"	16mm/ 5/8"	20mm/ 3/4"	25mm/ 1"	30mm/ 1.1/8"	40mm/ 1.5/8"	50mm/ 2"				
A	0.0004	0.0009	0.0011	0.0013	0.0014	0.0017	0.0021	0.0024	0.0027	0.0032	0.0034	0.0043	0.0049	0.0053	0.0061	0.0069				
B	0.0006	0.0011	0.0015	0.0016	0.0018	0.0021	0.0026	0.0031	0.0035	0.0041	0.0043	0.0053	0.0060	0.0065	0.0074	0.0082				
C	0.0006	0.0013	0.0017	0.0020	0.0022	0.0025	0.0031	0.0039	0.0043	0.0049	0.0051	0.0063	0.0071	0.0077	0.0087	0.0094				
D	0.0006	0.0015	0.0021	0.0024	0.0027	0.0031	0.0039	0.0047	0.0051	0.0059	0.0061	0.0074	0.0083	0.0090	0.0100	0.0108				
E	0.0007	0.0017	0.0024	0.0028	0.0031	0.0037	0.0045	0.0055	0.0059	0.0068	0.0071	0.0085	0.0094	0.0102	0.0112	0.0122				
F	0.0007	0.0020	0.0029	0.0033	0.0037	0.0043	0.0054	0.0065	0.0070	0.0080	0.0083	0.0098	0.0108	0.0116	0.0126	0.0135				
G	0.0007	0.0022	0.0033	0.0038	0.0043	0.0050	0.0063	0.0075	0.0081	0.0091	0.0094	0.0110	0.0122	0.0130	0.0140	0.0148				
H	0.0008	0.0026	0.0040	0.0046	0.0051	0.0059	0.0075	0.0090	0.0096	0.0107	0.0110	0.0126	0.0140	0.0148	0.0157	0.0165				
I	0.0008	0.0030	0.0047	0.0053	0.0059	0.0068	0.0087	0.0104	0.0110	0.0122	0.0126	0.0142	0.0157	0.0165	0.0173	0.0181				
J	0.0009	0.0033	0.0053	0.0060	0.0067	0.0078	0.0098	0.0117	0.0124	0.0137	0.0142	0.0159	0.0175	0.0183	0.0191	0.0198				
K	0.0010	0.0036	0.0059	0.0067	0.0075	0.0087	0.0110	0.0130	0.0138	0.0153	0.0157	0.0177	0.0193	0.0201	0.0209	0.0215				
L	0.0011	0.0040	0.0065	0.0073	0.0082	0.0094	0.0120	0.0142	0.0152	0.0165	0.0169	0.0191	0.0207	0.0215	0.0224	0.0231				
M	0.0012	0.0043	0.0071	0.0080	0.0089	0.0102	0.0130	0.0154	0.0165	0.0177	0.0181	0.0205	0.0220	0.0228	0.0238	0.0248				
N	0.0013	0.0047	0.0077	0.0086	0.0095	0.0110	0.0140	0.0165	0.0179	0.0189	0.0193	0.0219	0.0234	0.0242	0.0253	0.0265				
S	0.0003	0.0006	0.0008	0.0010	0.0012	0.0015	0.0020	0.0031	0.0039	0.0048	0.0051	0.0059	0.0070	0.0070	0.0090					
T	0.0006	0.0011	0.0016	0.0020	0.0024	0.0028	0.0035	0.0043	0.0051	0.0063	0.0067	0.0075	0.0080	0.0090	0.0100					
U	0.0010	0.0019	0.0028	0.0031	0.0035	0.0042	0.0055	0.0067	0.0079	0.0088	0.0091	0.0094	0.0110	0.0120	0.0140					
V	0.0015	0.0027	0.0039	0.0045	0.0051	0.0060	0.0079	0.0098	0.0110	0.0122	0.0126	0.0134	0.0160	0.0170	0.0200					
W	0.0019	0.0035	0.0051	0.0059	0.0067	0.0079	0.0102	0.0130	0.0150	0.0165	0.0169	0.0177	0.0190	0.0190	0.0200					
X	0.0022	0.0041	0.0059	0.0071	0.0083	0.0098	0.0130	0.0165	0.0189	0.0210	0.0217	0.0228								
Y	0.0027	0.0049	0.0071	0.0087	0.0102	0.0125	0.0169	0.0217	0.0276	0.0276	0.0276	0.0291								
Z	0.0037	0.0068	0.0098	0.0128	0.0157	0.0210	0.0315	0.0394	0.0433	0.0463	0.0472	0.0472								

How To Use This Chart to Find Cutting Feed Rate (IPR):

1. Find your Alpha Code on the AMG Chart (example: 279 U : U is the Alpha Code)
2. Find the closest diameter for your cutting application on the chart to find your IPR

Application Material Groups (AMG)		Hardness HRC	ISO	
1. Steel	1.1 Magnetic soft steel	12L14, 12L15	<120 HB	P 1
	1.2 Structural Steel/ case carburising steel	1005-1025, 1214, 1215, A36	<200 HB	P 1
	1.3 Plain Carbon steel	1030-1060, 1050-1060, 1144-1146	<24	P 2
	1.4 Alloy steel	4140,4340,52100,8620 H11-H41,A2,D2,01,P20,420	<24	P 3
	1.5 Alloy steel/ Hardened and tempered steel	4140,4340,52100,8620 H11-H41,A2,D2,01,P20,420	>24<38	P 4
	1.6 Alloy steel/ Hardened and tempered steel	4140,4340,52100,8620 H11-H41,A2,D2,01,P20,420	>38	H 1
	1.7 Alloy steel Hardened	A2-D2, H10-H41, L1-L6, M1-M42, T1	49-55	H 3
	1.8 Alloy steel Hardened	A2-D2, H10-H41, L1-L6, M1-M42, T1	55-63	H 4
2. Stainless Steel	2.1 Free machining Stainless Steel	200, 303, 416, 420F, 430F, 440	<24	M 1
	2.2 Austenitic	301, 302, 304, 316, 321, 330, CUSTOM 455, AM-350	<24	M 3
	2.3 Ferritic + Austenitic, Martensitic	318-329, 400-446, DUPLEX	<32	M 2
	2.4 Precipitation Hardened	15-5PH, Custom 450 17-4PH	<32	S 2
3. Cast Iron	3.1 Lamellar graphite	Grey, G10, Gg40, J431C, A48 CLASS 20	<150 HB	K 1
	3.2 Lamellar graphite	Grey, GG25-Gg40, J158, A48 CLASS 40-60	>150 HB<32	K 2
	3.3 Nodular graphite/ Malleable Cast Iron	A220, A436, A439, A602, Black, GGG40-GGG70	<200 HB	K 3
	3.4 Nodular graphite/ Malleable Cast Iron	Black Gts/Gtw, J434C	>200 HB<32	K 4
4. Titanium	4.1 Titanium, unalloyed	Commercially Pure	<200 HB	S 1
	4.2 Titanium, alloyed	6Al4V, 6A14V-2Sn, Monel, Monel K	<28	S 2
	4.3 Titanium, alloyed	6Al4V-4Mo, 7A14V-4Mo, 4911-4967	>28<38	S 3
5. Nickel	5.1 Nickel, unalloyed	Commercially Pure, 17644, 200, 5553	<150 HB	S 1
	5.2 Nickel, alloyed	Monel 400, Hastelloy C, Inconel 625, Waspaloy	<28	S 2
	5.3 Nickel, alloyed	Inconel 718,Nimonic 75-95,Rene 41,Inconel 825,A286	>28<38	S 3
6. Copper	6.1 Copper	Commercially Pure	<100 HB	N 3
	6.2 β-Brass, Bronze	314-340, 350-370	<200 HB	N 4
	6.3 α-Brass	Alloyed Cu + Al + Fe, Long Chipping	<200 HB	N 3
	6.4 High Strength Bronze	Ampco 18-25	<49	N 4
7. Aluminium Magnesium	7.1 Al, Mg, unalloyed	Commercially Pure	<100 HB	N 1
	7.2 Al alloyed, Si<0.5%	6061 T6, 7075, 314-340	<150 HB	N 1
	7.3 Al alloyed, Si>0.5%<10%	6061 T6, 380-390	<120 HB	N 1
	7.4 Al alloyed, Si>10% Mg alloys	Magnesium Whisker Reinforced	<120 HB	N 2
8. Synthetic Materials	8.1 Thermoplastics	Ultradim, Polystrol	---	O
	8.2 Thermosetting plastics	Bakelit, Pertinax	---	O
	8.3 Reinforced plastic materials	CFK, GFKAFK	---	O
9. Hard Mat.	9.1 Cermets (Metal-ceramics)	Ferrotic	<54	H
10. Graphite	10.1 Standard graphite		---	O


SCREW MACHINE DRILL



General Purpose Screw Machine Length

A022 Low thrust design self centering Split Point for easier penetration. TiN Coated Tip increases wear resistance and improves tool life.

Metric sizes to DIN1897 lengths.
Fractional sizes to ANSI lengths.

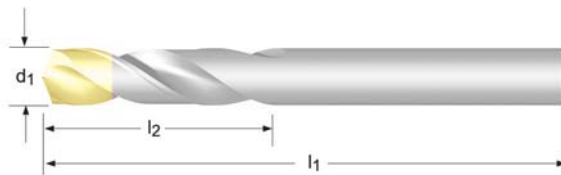

A022

DIN
ANSI

2.5XD

HSS

135°



0.50 - 16.00

* 2mm and smaller are bright with no split point

d_1 $\varnothing h_8$ Inch	d_1 $\varnothing h_8$ mm	d_1 decimal Inch	l_2 mm	l_1 mm	Pack Qty	A022
	0.50	0.0197	3	20	10	0600382
	0.60	0.0236	3.5	21	10	0600399
	0.70	0.0276	4.5	23	10	0600405
1/32	0.79	0.0313	13	35	10	0600542
	0.80	0.0315	5	24	10	0600412
	0.90	0.0354	5.5	25	10	0600429
	1.00	0.0394	6	26	10	0600436
	1.10	0.0433	7	28	10	0600443
3/64	1.19	0.0469	13	35	10	0600559
	1.20	0.0472	8	30	10	0600450
	1.30	0.0512	8	30	10	0600467
	1.40	0.0551	9	32	10	0600474
	1.50	0.0591	9	32	10	0600481
1/16	1.59	0.0625	16	41	10	0600535
	1.60	0.0630	10	34	10	0600498
	1.70	0.0669	10	34	10	0600504
	1.80	0.0709	11	36	10	0600511
	1.90	0.0748	11	36	10	0600528
5/64	1.98	0.0781	17	43	10	0600566
	2.00	0.0787	12	38	10	0600115
	2.10	0.0827	12	38	10	0600122
	2.20	0.0866	13	40	10	0600139
	2.25	0.0886	13	40	10	0600146
	2.30	0.0906	13	40	10	0600153
3/32	2.38	0.0937	20	45	10	0600238
	2.40	0.0945	14	43	10	0600160
	2.50	0.0984	14	43	10	0600177
	2.60	0.1024	14	43	10	0600184
	2.65	0.1043	14	43	10	0600191
	2.70	0.1063	16	46	10	0600207
7/64	2.78	0.1094	22	47	10	0600245
	2.80	0.1102	16	46	10	0600214
	2.90	0.1142	16	46	10	0600221



SCREW MACHINE DRILL

d_1 $\varnothing h_8$ Inch	d_1 $\varnothing h_8$ mm	d_1 decimal Inch	l_2 mm	l_1 mm	Pack Qty	A022
1/8	3.00	0.1181	16	46	10	0588697
	3.10	0.1220	18	49	10	0589083
	3.18	0.1250	23	49	10	0588727
	3.20	0.1260	18	49	10	0589090
	3.25	0.1280	18	49	10	0589106
	3.30	0.1299	18	49	10	0589113
9/64	3.40	0.1339	20	52	10	0589120
	3.50	0.1378	20	52	10	0589137
	3.57	0.1406	25	50	10	0589878
	3.60	0.1417	20	52	10	0589144
	3.70	0.1457	20	52	10	0589151
	3.80	0.1496	22	55	10	0589168
5/32	3.90	0.1535	22	55	10	0589175
	3.97	0.1563	26	53	10	0589410
	4.00	0.1575	22	55	10	0589205
	4.10	0.1614	22	55	10	0589212
	4.20	0.1654	22	55	10	0589229
	4.30	0.1693	24	58	10	0589236
11/64	4.37	0.1719	28	55	10	0588932
	4.40	0.1732	24	58	10	0589243
	4.50	0.1772	24	58	10	0589250
	4.60	0.1811	24	58	10	0589267
	4.70	0.1850	24	58	10	0589274
	4.76	0.1875	30	57	10	0589182
3/16	4.80	0.1890	26	62	10	0589281
	4.90	0.1929	26	62	10	0589298
	5.00	0.1969	26	62	10	0589304
	5.10	0.2008	26	62	10	0589311
	5.16	0.2031	31	58	10	0589014
	5.20	0.2047	26	62	10	0589328
7/32	5.30	0.2087	26	62	10	0589335
	5.40	0.2126	28	66	10	0589342
	5.50	0.2165	28	66	10	0589359
	5.56	0.2188	33	61	10	0589649
	5.60	0.2205	28	66	10	0589366
	5.70	0.2244	28	66	10	0589373
15/64	5.80	0.2283	28	66	10	0589380
	5.90	0.2323	28	66	10	0589397
	5.95	0.2344	34	63	10	0589069
	6.00	0.2362	28	66	10	0589434
	6.10	0.2402	31	70	10	0589441
	6.20	0.2441	31	70	10	0589458
1/4	6.30	0.2480	31	70	10	0589465
	6.35	0.2500	36	65	10	0588710
	6.40	0.2520	31	70	10	0589472
	6.50	0.2559	31	70	10	0589489
	6.60	0.2598	31	70	10	0589496
	6.70	0.2638	31	70	10	0589502
9/32	6.80	0.2677	34	74	10	0589519
	6.90	0.2717	34	74	10	0589526
	7.00	0.2756	34	74	10	0589533
	7.10	0.2795	34	74	10	0589540
	7.14	0.2813	40	70	10	0589861
	7.20	0.2835	34	74	10	0589557
5/16	7.30	0.2874	34	74	10	0589564
	7.40	0.2913	34	74	10	0589571
	7.50	0.2953	34	74	10	0589588
	7.60	0.2992	37	79	10	0589595
	7.70	0.3031	37	79	10	0589601
	7.80	0.3071	37	79	10	0589618
5/16	7.90	0.3110	37	79	10	0589625
	7.94	0.3125	43	73	10	0589403
	8.00	0.3150	37	79	10	0589656
	8.10	0.3189	37	79	10	0589663
	8.20	0.3228	37	79	10	0589670
	8.30	0.3268	37	79	10	0589687

SCREW MACHINE DRILL



d_1 \varnothing_{h_8} Inch	d_1 \varnothing_{h_8} mm	d_1 decimal Inch	l_2 mm	l_1 mm	Pack Qty	A022
	8.40	0.3307	37	79	10	0589694
	8.50	0.3346	37	79	10	0589700
	8.60	0.3386	40	84	10	0589717
	8.70	0.3425	40	84	10	0589724
11/32	8.73	0.3438	45	78	10	0588925
	8.80	0.3465	40	84	10	0589731
	8.90	0.3504	40	84	10	0589748
	9.00	0.3543	40	84	10	0589755
	9.10	0.3583	40	84	10	0589762
	9.20	0.3622	40	84	10	0589779
	9.30	0.3661	40	84	10	0589786
	9.40	0.3701	40	84	10	0589793
	9.50	0.3740	40	84	10	0589809
3/8	9.52	0.3750	48	81	10	0589199
	9.60	0.3780	43	89	10	0589816
	9.70	0.3819	43	89	10	0589823
	9.80	0.3858	43	89	10	0589830
	9.90	0.3898	43	89	10	0589847
	10.00	0.3937	43	89	10	0588734
	10.10	0.3976	43	89	5	0588741
	10.20	0.4016	43	89	5	0588758
	10.30	0.4055	43	89	5	0588765
13/32	10.32	0.4062	51	86	5	0589007
	10.40	0.4094	43	89	5	0588772
	10.50	0.4134	43	89	5	0588789
	10.60	0.4173	43	89	5	0588796
	10.70	0.4213	47	95	5	0588802
	10.80	0.4252	47	95	5	0588819
	10.90	0.4291	47	95	5	0588826
	11.00	0.4331	47	95	5	0588833
	11.10	0.4370	47	95	5	0588840
7/16	11.11	0.4375	54	89	5	0589632
	11.20	0.4409	47	95	5	0588857
	11.30	0.4449	47	95	5	0588864
	11.50	0.4528	47	95	5	0588871
	11.60	0.4567	47	95	5	0588888
	11.70	0.4606	47	95	5	0588895
	11.80	0.4646	47	95	5	0588901
	11.90	0.4685	51	102	5	0588918
	12.00	0.4724	51	102	5	0588949
	12.10	0.4764	51	102	5	0588956
	12.20	0.4803	51	102	5	0588963
	12.50	0.4921	51	102	5	0588970
1/2	12.70	0.5000	60	98	5	0588703
	13.00	0.5118	51	102	5	0588987
	13.50	0.5315	54	107	1	0588994
	14.00	0.5512	54	107	1	0589021
9/16	14.29	0.5625	67	105	1	0589854
	14.50	0.5709	56	111	1	0589038
	15.00	0.5906	56	111	1	0589045
	15.50	0.6102	58	115	1	0589052
5/8	15.88	0.6250	73	111	1	0589427
	16.00	0.6299	58	115	1	0589076

SCREW MACHINE DRILL SETS



General Purpose Screw Machine Drill Set

A088

Low thrust design self centering Split Point for easier penetration. TiN Coated Tip increases wear resistance and improves tool life.



A088

DIN
ANSI

2.5XD

HSS

135°



Set

Set	Style	Pieces per Set	Sizes	Pack Qty	A088
200S	A022	24	1.0 mm - 10.5 mm x 0.5 mm + 3.3 mm, 4.2 mm, 6.8 mm, 10.2 mm	1	0616185