
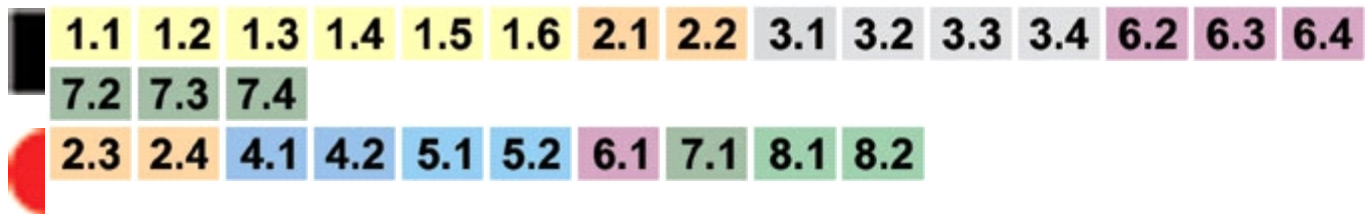


S802HB

Slot Drill

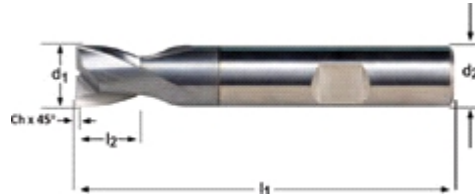

d ₁ R mm	Ch ±0.03x45° mm	d ₂ R _{h6} mm	l ₂ mm	l ₁ mm	z	e-code	USD
1.80	-	6	3	50	2	S802HB1.8	60.00
2.00	-	6	3	50	2	S802HB2.0	55.10
2.50	0.08	6	3	50	2	S802HB2.5	58.20
2.80	0.08	6	4	50	2	S802HB2.8	61.20
3.00	0.08	6	4	50	2	S802HB3.0	55.10
3.50	0.08	6	4	50	2	S802HB3.5	61.20
3.80	0.08	6	5	54	2	S802HB3.8	67.30
4.00	0.13	6	5	54	2	S802HB4.0	60.00
4.50	0.13	6	5	54	2	S802HB4.5	67.30
4.80	0.13	6	6	54	2	S802HB4.8	67.30
5.00	0.13	6	6	54	2	S802HB5.0	61.20
5.75	0.13	6	7	54	2	S802HB5.75	67.30
6.00	0.13	6	7	54	2	S802HB6.0	61.20
6.75	0.13	8	8	58	2	S802HB6.75	91.80
7.00	0.13	8	8	58	2	S802HB7.0	91.80
7.75	0.13	8	9	58	2	S802HB7.75	98.00
8.00	0.20	8	9	58	2	S802HB8.0	1) 85.70
9.00	0.20	10	10	66	2	S802HB9.0	1) 123.00
9.70	0.20	10	11	66	2	S802HB9.7	1) 123.00
10.00	0.20	10	11	66	2	S802HB10.0	1) 113.00
11.70	0.20	12	12	73	2	S802HB11.7	1) 171.00
12.00	0.20	12	12	73	2	S802HB12.0	1) 157.00
13.70	0.20	14	14	75	2	S802HB13.7	1) 214.00
14.00	0.20	14	14	75	2	S802HB14.0	1) 197.00
15.70	0.20	16	16	82	2	S802HB15.7	1) 276.00

d ₁ R mm	Ch ±0.03x45° mm	d ₂ R _{h6} mm	l ₂ mm	l ₁ mm	z	e-code		USD
16.00	0.20	16	16	82	2	S802HB16.0	1)	256.00
17.70	0.20	18	18	84	2	S802HB17.7	1)	336.00
18.00	0.20	18	18	84	2	S802HB18.0	1)	331.00
19.70	0.30	20	20	92	2	S802HB19.7	1)	459.00
20.00	0.30	20	20	92	2	S802HB20.0	1)	398.00

¹⁾± 0.05x45° mm