

Dynafine® Detail Sander

Air-Powered Finishing Sander

**ABRASIVE
CAPACITY**
TEAR-DROP DISCS

3-3/4" x 2-3/8" (95 mm x 60 mm)

TRIANGULAR DISCS

2-7/8" x 3-1/8" (73 mm x 79 mm)

Excellent for Use in Tight Corners

Model 57900

- Detail sander includes triangular and tear-drop hook-face pads; also includes 94407 Flow-Control Dynaswivel®.
- Excellent for cleaning wood edges and corners.
- Ideal for use on furniture, shutters, moldings, door jambs, metal parts and much more.
- Features 1/32" dia. orbital action for superior finishes.
- Handle is offset 7° for greater operator comfort and control.
- Uses hook-face and PSA (adhesive-backed) coated, non-woven nylon and sponge abrasives.


Orbital Motion


Model 57900



57910



57900

Model 57910 Versatility Kit

- Includes 57900 tool with hook-face and PSA (adhesive-backed) pads, 94407 Flow-Control Dynaswivel® (not shown) and an assortment of abrasives.

| Model Number | Motor hp (W) | Motor RPM | Sound Level | Maximum Air Flow SCFM (LPM) | Hose I.D. Size Inch (mm) | Air Inlet Thread | Weight Pound (kg) | Length Inch (mm) | Height Inch (mm) |
|--------------|--------------|-----------|-------------|-----------------------------|--------------------------|------------------|-------------------|------------------|------------------|
| 57900 | .12 (89) | 13,000 | 65 dB(A) | 20 (566) | 1/4 (6) | 1/4" NPT | 1.6 (.7) | 9 (229) | 3-3/4 (95) |

Tune-Up Kit: No. 96236 (page 192) • Additional Specifications: Air Pressure 90 PSIG (6.2 Bar)

Dynafine® Finger Sander

Air-Powered Finishing Sander

**ABRASIVE
CAPACITY**
ABRASIVE STRIPS

3/8" x 2" (10 mm x 51 mm)

3/4" x 2" (19 mm x 51 mm)


Excellent for Use in Hard-to-Reach Areas

Model 57930


- Tool includes 57932 Offset Sanding Arm (with 57938 Soft Platen Pad), 94407 Flow-Control Dynaswivel® and an assortment of abrasives.
- Ideal for use on wood, metal, varnished surfaces, non-ferrous metals, stone, glass, marble, plastic, composites, painted surfaces and more!
- Handle is offset 7° for greater operator comfort and control.
- 1/32" dia. orbital action for fine finishes.



Model 57930

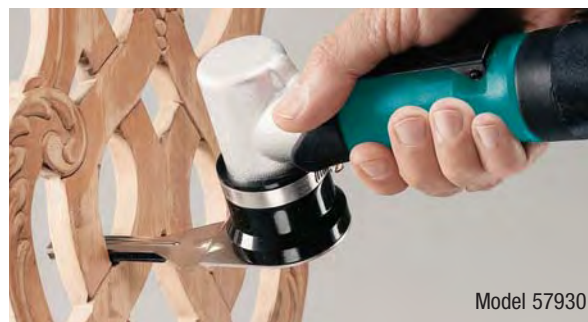

Model 57930


Orbital Motion

Platen Pads (sold separately)

| Part No. | Size (W x L) | Density |
|----------|---------------------------|---------|
| 57938 | 3/8" (9 mm) x 2" (52 mm) | Soft |
| 57940 | 3/8" (9 mm) x 2" (52 mm) | Hard |
| 57937 | 3/4" (19 mm) x 2" (52 mm) | Soft |
| 57939 | 3/4" (19 mm) x 2" (52 mm) | Hard |

| Model Number | Motor hp (W) | Motor RPM | Sound Level | Maximum Air Flow SCFM (LPM) | Hose I.D. Size Inch (mm) | Air Inlet Thread | Weight Pound (kg) | Length Inch (mm) | Height Inch (mm) |
|--------------|--------------|-----------|-------------|-----------------------------|--------------------------|------------------|-------------------|------------------|------------------|
| 57930 | .12 (89) | 13,000 | 65 dB(A) | 20 (566) | 1/4 (6) | 1/4" NPT | 1.6 (.7) | 11-3/4 (298) | 4 (102) |

Tune-Up Kit: No. 96236 (page 192) • Additional Specifications: Air Pressure 90 PSIG (6.2 Bar)

