


**Model: EP series of  
Molded Faceshield Visors**

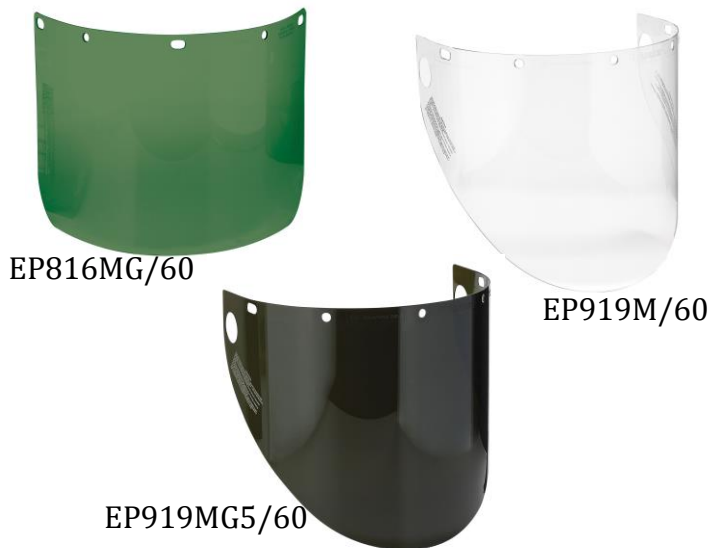

**Description:**

EP series of molded faceshield visors offers an exceptional optical quality and undistorted vision. This series comes in two different sizes to be used in a variety of applications. All visors come with strategically located slots to fit a variety of different headgears and cap-mounted brackets. This series is made of PETG in .06" of thickness. Visors are available in clear for inside & low-light use, and in green to help in minimising glare while working outside or in high-luminous environments. Also available in green shaded IR protection for use in welding environments.

Product Number	Description	Order Multiples	Case Quantity
EP816M/60	Clear molded visor, 8" x 16-1/2", PETG material, 0.6" thickness	10	10
EP816MG/60	Green molded visor, 8" x 16-1/2", PETG material, 0.6" thickness	10	10
EP816MG3/60	Green molded visor, 8" x 16-1/2", PETG material, 0.6" thickness, Shade 3	10	10
EP816MG5/60	Green molded visor, 8" x 16-1/2", PETG material, 0.6" thickness, Shade 5	10	10
EP919M/60	Clear molded visor, 9-1/2" x 20", PETG material, 0.6" thickness	10	10
EP919MG/60	Green molded visor, 9-1/2" x 20", PETG material, 0.6" thickness	10	10
EP919MG3/60	Green molded visor, 9-1/2" x 20", PETG material, 0.6" thickness, Shade 3	10	10
EP919MG5/60	Green molded visor, 9-1/2" x 20", PETG material, 0.6" thickness, Shade 5	10	10

<b>SIZE</b>	N/A	<b>COUNTRY OF ORIGIN</b>	Canada
<b>TYPE</b>	Molded Faceshield Visor	<b>MATERIALS</b>	PETG
<b>CLASSIFICATION</b>	Class 6 (combination with hardhat & bracket or headgear)	<b>DEFLECTION TEMPERATURE</b>	PETG = 157° F (69° C)
<b>COMPLIANCE</b>	CSA Z94.3-15 / ANSI Z87.1-2014	<b>COLOR</b>	Clear / Green
<b>COMPONENT CLASSIFICATION</b>	Secondary face protection	<b>OTHERS</b>	

Revision: MAR - 2018

**Head Office**

2477, Michelin, Laval, Qc H7L 5B9  
T: (450) 622-7374/ 1 877 446-3278  
F: (450) 622-2243/ 1 877 463-2789

**Fall Protection Manufacturing**

175 Admiral Blvd., Mississauga, On L5T 2T3  
T: (905) 565-9990  
F: (905) 565-9906