



## DESCRIPTION

### Dynamic 5,000-lbf / 22kN Removable Bolt Anchor.

A removable and reusable anchor designed to work in 20mm (3/4") drilled hole in concrete substrates.

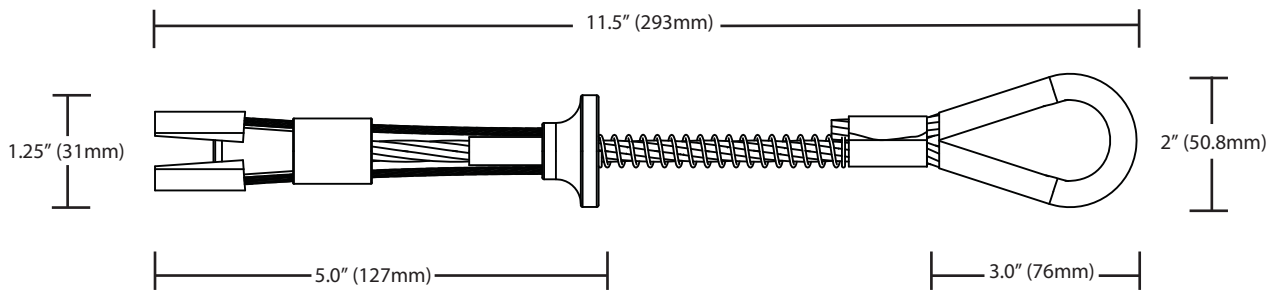

HOLE DRILLING REQUIREMENT CHART	
(A) Minimum distance from edge/corner	(B) Concrete thickness
6" (15.3 cm)	12" (30.5 cm)
12" (30.5 cm)	5" (12.7 cm)

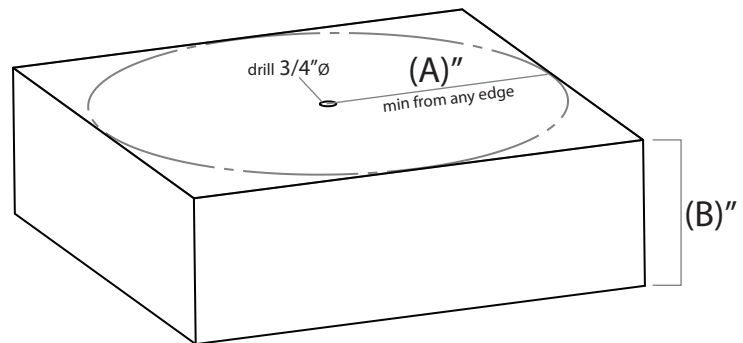

## SPECIFICATIONS

<p>▼ <b>UTS</b> 5,000-lbf / 22kN</p>	<p>▼ <b>Max User Weight</b> 310-lbs / 140kg</p>	<p>▼ <b>Working Load</b> 1000-lbs / 454kg</p>
--	---	---

## MATERIALS

<p>▼ <b>Spoons</b> Stainless Steel</p>	<p>▼ <b>Swage</b> Zinc Plated Copper</p>	<p>▼ <b>Cone</b> Stainless Steel</p>	<p>▼ <b>Anchor Loop</b> Polyurethane</p>
<p>▼ <b>Cleaning Bushing</b> Zinc Plated Steel</p>	<p>▼ <b>Spring</b> Zinc Plated Steel</p>	<p>▼ <b>Stop Sleeve</b> Stainless Steel</p>	<p>▼ <b>Trigger</b> Aluminum</p>
<p>▼ <b>Main Cable</b> Aircraft Cable</p>	<p>▼ <b>Return Wire</b> Aircraft Cable</p>		

## PRODUCT CONFIGURATIONS

MODEL	APPLICATION	COLOR	LOADING	WEIGHT
FP3731-75	Concrete	Blue	5,000-lbf (22kN)	200g