
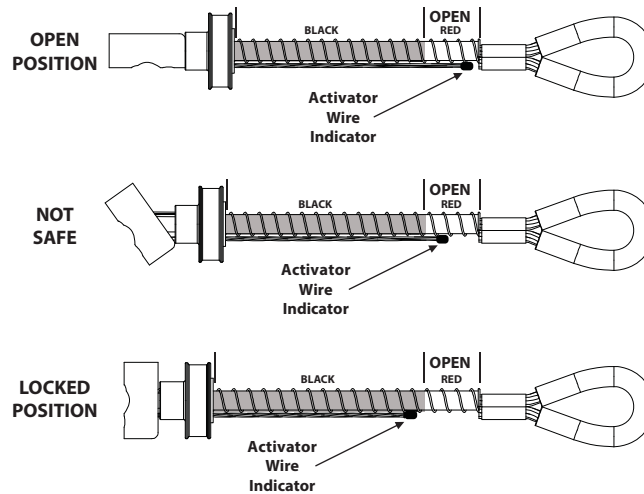


DESCRIPTION

Dynamic 5,000-lbf / 22kN Toggle Anchor.

A removable and reusable anchor designed to work in hollow-core concrete or in steel flange with a minimum thickness of 64mm (1/4").

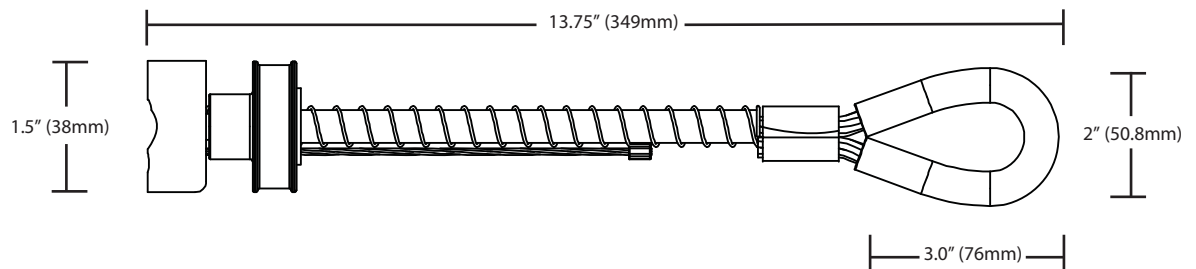

SPECIFICATIONS

- ▼
UTS
 5,000-lbf / 22kN
- ▼
Max User Weight
 310-lbs / 140kg
- ▼
Working Load
 1000-lbf / 454kg

MATERIALS

- ▼
Toggle Bar
 Stainless Steel
- ▼
Swage
 Zinc Plated Copper
- ▼
Ball Shank
 Stainless Steel
- ▼
Anchor Loop
 Polyurethane
- ▼
Hole Plug
 Aluminum
- ▼
Spring
 Zinc Plated Steel
- ▼
Main Cable
 Aircraft Cable
- ▼
Activator Wire
 Aircraft Cable

PRODUCT CONFIGURATIONS

MODEL	APPLICATION	COLOR	LOADING	WEIGHT
FP3733-75	Concrete	Blue	5,000-lbf (22kN)	207g