

Fall Protection



FALL PROTECTION



DSI SAFETY INC. KNOWN AS DYNAMIC SAFETY INTERNATIONAL IS A CANADIAN OWNED AND OPERATED COMPANY.

Dynamic Safety International, well known for its Dynamic brand of products is a fast growing company due to its highly motivated, knowledgeable and experienced team of employees, combined with its offering of innovative safety products covering the fields of Head protection, Eye & Face Protection, Hearing Protection, Respiratory Protection, Fall Protection, and without forgetting First Aid and Traffic Safety Products. In 2019, a new line of Identification Products will be available (barricade tape, signage, lockout station, etc).

Dynamic products are proudly made to meet all safety regulations and/or standards required in North and South America and in Europe. All of the Dynamic safety products are certified by a multitude of certification bodies when needed, such as CSA, ANSI, NIOSH and CE. We proudly apply their Logos when permitted. Thus proving you our dedication to protect you in the best possible way and showing you our efforts to provide you with the highest quality products that you can trust at all times.



Our team of Product Managers, the best in their fields of experience, cumulate over 100 years of experience and expertise in their respective areas of knowledge. Whether it is for your needs in Head Protection, Eye & Face Protection, Hearing Protection, Respiratory Protection, Fall Protection, First Aid or Traffic Safety, we have skillful people that can help you with training sessions, risk assessment surveys and can even help your safety committee to select the proper product for a specific situation.

Our Goal at Dynamic Safety International is to design and produce the best and safest safety products, and ensure that all your employees come home every day safe and sound.





ABCS OF PERSONAL FALL ARREST SYSTEM

A

Anchorage Connectors

Products that connect the connecting device to the anchor structure.

Cable Slings	36
Pass Through Slings	36
D-Ring Anchors	37
Removable Concrete Anchors	37
Toggle Anchors	37
Drop Through Anchor	37
Swivel Anchors	38
Beam Anchors	38
Door/Window Anchors	39
Roof Brackets & 4 Persons Temporary Rope Horizontal Lifeline	39

B

Body Wear

Personal protective equipment worn by the user.

Dyna-Pro Aluminium Professional Harnesses	5
Dyna-Pro Universal & Professional Harnesses	6
Dyna-I Universal Harnesses	7
Hybrid Econo Harnesses	8
B-Compliant Harnesses	9
Dyna-Tower Harnesses	10
Y-Trend Harnesses	11
V-Trend Harnesses	11
Easy Don X-Trend Aluminium Harnesses	12
Miss Dyna Harnesses	13
Easy Don X-Trend Harnesses	14
X-Trend Harnesses	15
Kevlar Harnesses	16
Dyna-I Coated Harnesses	17
Anti Corrosion Harnesses	18
Dyna-Viz Harnesses	18
Construction Pro Harnesses	19
Construction Harness Eco	19
Harnesses Combo	20
Industrial Body Belts & Miner's Belt	21

C

Connecting Devices

Products that connect the body wear to anchorage connectors. Critical to the system as it usually has energy absorbing technology.

Personal Self-Retracting Devices	22-23
Self-Retracting Devices	24
Rope & Web Lanyards	25
Lanyards	26-31
Energy Absorbers & Extended D-Ring	32
Work Positioning Products	32
Hooks & Carabiners	33
Vertical Rope Lifelines	34
Rope Grabs	35
Compliance Kits & Roofer's Kits	41
Inspection Tags, Accesories & Storage Bags	42

D

Descent/Rescue and Confined Space

Product that can be used in a rescue plan to ensure rescue is done in a timely matter.

Rescue & Retrieval Systems	39
Tripods & Accessories	40

FALL PROTECTION




HARNESS SIZING & CLASS

HARNESS APPLICATION CLASS

Harnesses are available for a variety of applications signified by the pictograms and definitions below.



Class A
Fall Arrest
CSA Group A



Class P
Work Positioning
CSA Group P



Class E
Evacuation / Retrieval
CSA Group E




Class L
Ladder Climbing
CSA Group L



Class D
Suspension & Descent
CSA Group D

HARNESS SIZING CHARTS

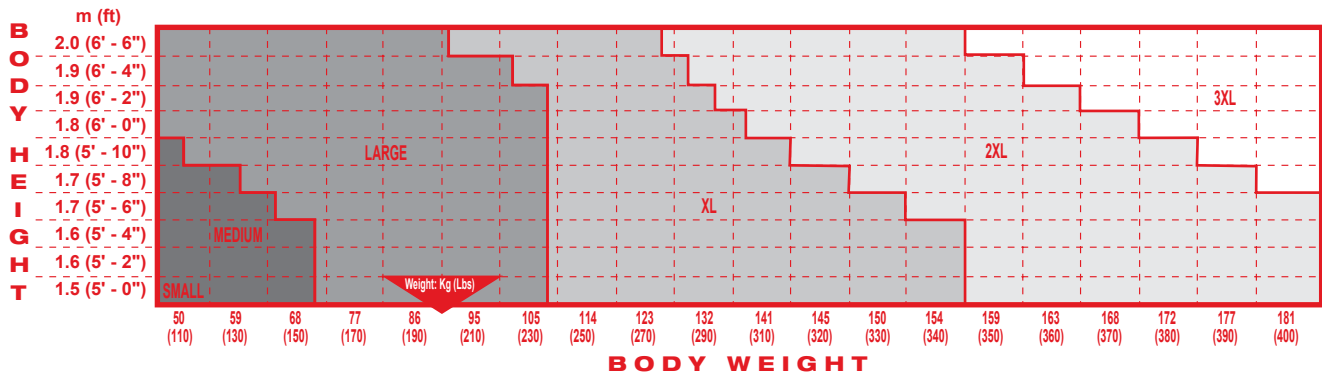

BELT SIZING CHARTS

BELT SIZE	WAIST MESUREMENT	
	CENTIMETERS	INCHES
SMALL	71 TO 91 CM	28" TO 36"
MEDIUM	81 TO 101 CM	32" TO 40"
LARGE	91 TO 111 CM	36" TO 44"
XLARGE	101 TO 122 CM	40" TO 48"
XXLARGE	111 TO 132 CM	44" TO 52"
XXXLARGE*	122 TO 142 CM	48" TO 56"

* This size is available upon request with a supplement of 15%

CONNECTION DEVICES




Quick Connect Buckle
Bayonet style



Tongue and Buckle
(Grommets)



Friction Buckle
Pass Through



Friction Buckle

Dyna-Pro Aluminum Professional Harnesses

VEST STYLE HARNESS WITH ALL ALUMINUM HARDWARE. INTEGRATED PAD ON SHOULDERS & LEG STRAPS. 5 POINT ADJUSTMENT.



CERTIFIED BY CSA CANADA

Dynamic Dyna-Pro Aluminum harness is designed for comfort eliminating all unnecessary weight and bulkiness in both padding and hardware. With all the hardware made out of aluminum, the overall weight of the harness is reduced by 25% and provides ultimate corrosion resistance making this harness ideal for those working in highly corrosive environments. The Dynamic back pad focuses on comfort while relieving pressure point at all the right places such as your shoulders and the back of the legs. The minimalistic pad eliminates heat zones, weight and reduces the overall bulkiness of the harness making this harness one of the most comfortable harness you will wear. It also has trauma straps on both sides to provide time in a rescue situation. These harnesses are CSA certified class ADPLE. They also meet and exceed ANSI and OSHA regulations.



FPX1003DG




FPX1004SD




FALL ARREST HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPX1001D	A	B	ALUMINUM BAYONET
FPX1001ED	A	B, X	ALUMINUM BAYONET
FPX1001DG	A	B	TONGUE BUCKLES
FPX1001EDG	A	B, X	TONGUE BUCKLES



WORK POSITIONING HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPX1003D	A, P	B, S	BAYONET
FPX1003DG	A, P	B, S	TONGUE BUCKLES



WORK POSITIONING, CONFINED SPACES & LADDER CLIMBING HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPX1002D	A, D, L	F, B	ALUMINUM BAYONET
FPX1004D	A, D, P, L	F, B, S	ALUMINUM BAYONET
FPX1004DG	A, D, P, L	F, B, S	TONGUE BUCKLES
FPX1004SD	A, D, E, L	F, B, E	ALUMINUM BAYONET
FPX1004SDG	A, D, E, L	F, B, E	TONGUE AND BUCKLES

CLASS (Legend)

A - Fall Arrest • P - Work Positioning • D - Suspension & descent • L - Ladder Climbing • E - Confined Spaces

Metalic D-ring

F - Front • B - Back (adjustable) • S - Sides or hips • E - Shoulders • L - Chest strap buckle
X - Extension (d-ring)

FALL PROTECTION



Dyna-Pro Universal & Professional Harnesses

VEST STYLE HARNESS WITH INTEGRATED CUSHION ON BACK, SHOULDERS & LEG STRAPS AND 5 POINT ADJUSTMENT



CERTIFIED BY CSA CANADA

The "DYNA-PRO" line of harnesses were designed for the ultimate in ease of harness donning, with light weight breathable padding only where it is required. The "DYNA-PRO" has minimal body contact for a superior fit and comfort. Most presently available padded harnesses have padding in areas that do not add to the users comfort, in fact they actually create unnecessary hot zones. When wearing this harness the user forgets that they are wearing it even if they wear it all day long. The "DYNA-PRO" harness is the lightest in its category. It offers all the necessary cushion padding needed for maximum comfort and in no case does the padding interfere with the mobility necessary to do the job. The harness also has trauma straps on both sides to provide time in a rescue situation. It also has trauma straps on both sides to provide time in a rescue situation.

The harnesses also come with bayonet style connectors which make it easy to put on and off. Available in sizes Regular and Extra Large. These harnesses meet and exceed ANSI and OSHA regulations and is CSA Certified.



FALL ARREST HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP1001D	A	B	BAYONET
FP1001ED	A	B, X	BAYONET
FP1001DG	A	B	TONGUE BUCKLES
FP1001EDG	A	B, X	TONGUE BUCKLES

WORK POSITIONING HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP1003D	A, P	B, S	BAYONET
FP1003DG	A, P	B, S	TONGUE BUCKLES

WORK POSITIONING, CONFINED SPACE & LADDER CLIMBING HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP1002D	A, D, L	F, B	BAYONET
FP1004D	A, D, P, L	F, B, S	BAYONET
FP1004DG	A, D, P, L	F, B, S	TONGUE BUCKLES
FP1004SD	A, D, E, L	F, B, E	BAYONET
FP1004SDG	A, D, E, L	F, B, E	TONGUE BUCKLE

BACK SUPPORT KIT

PART NO.	DESCRIPTION	SIZE
FP550/1	DELUXE "ADD ON" LUMBAR SUPPORT FOR BELTS WITH CUSHION, COLOR RED AND BLACK. COMES WITH A TOOL BELT MODEL FP5000D. THIS KIT CAN BE ADDED TO ALL HARNESS OF FP1000, FP2000 AND FP2500 SERIES.	S/M OR L/XL



CLASS (Legend)

A - Fall Arrest • **P** - Work Positioning
D - Suspension & descent • **L** - Ladder Climbing
E - Confined Spaces

Metalic D-ring

F - Front • **B** - Back (adjustable) • **S** - Sides or hips
E - Shoulders • **L** - Chest strap buckle • **X** - Extension (d-ring)

Dyna-I Universal Harnesses

VEST STYLE WITH 5 POINT ADJUSTMENT



CERTIFIED BY CSA CANADA

The vest style harnesses from DYNAMIC are made to offer comfort and ease of use. The shoulder straps and the chest strap are totally adjustable and will give you the possibility of positioning them in order to optimize your comfort. The polyester webbing gives you maximum protection against UV Rays and high resistance to most chemicals. DYNAMIC offers you a combination of leg strap connectors, D-Rings and others connectors to answer all your needs. All DYNAMIC harnesses offer a sub-pelvic strap with a sewn pattern that gives you maximum comfort. You will not feel the sewn pattern at all and you will feel like you are sitting on a cloud.

All harnesses are available in sizes Regular and Extra-Large. They also meet and exceeds the ANSI and OSHA regulations and is CSA Certified.



FP2001BED


FP2003DG

FP2006BD




FALL ARREST HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP2001D	A	B	FRICITION
FP2001ED	A	B, X	FRICITION
FP2001BD*	A	B	BAYONET
FP2001BED*	A	B, X	BAYONET
FP2001DG	A	B	TONGUE BUCKLES
FP2001EDG	A	B, X	TONGUE BUCKLES
FP2001BDG*	A	B	TONGUE BUCKLES
FP2001BEDG*	A	B, X	TONGUE BUCKLES



WORK POSITIONING HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP2003D	A, P	B, S	FRICITION
FP2003ED	A, P	B, X, S	FRICITION
FP2003BD*	A, P	B, S	BAYONET
FP2003BED*	A, P	B, X, S	BAYONET
FP2003DG	A, P	B, S	TONGUE BUCKLES
FP2003EDG	A, P	B, X, S	TONGUE BUCKLES
FP2003BDG*	A, P	B, S	TONGUE BUCKLES
FP2003BEDG*	A, P	B, X, S	TONGUE BUCKLES



WORK POSITIONING & CONFINED SPACES HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP2002BD	A, L	B, F	BAYONET
FP2002BDG*	A, L	B, F	TONGUE BUCKLES
FP2003SD	A, E	B, E	FRICITION
FP2003SDG*	A, E	B, E	TONGUE BUCKLES
FP2003BSD*	A, E	B, E	BAYONET
FP2003BESD*	A, E	B, E	BAYONET
FP2003BSDG*	A, E	B, E	TONGUE BUCKLES
FP2004BD*	A, D, L, P	F, B, S	BAYONET
FP2004BDG*	A, D, L, P	F, B, S	TONGUE BUCKLES
FP2004SBDG*	A, D, L, E	F, B, S	TONGUE BUCKLES
FP2005D	A, P, E	B, S, E	FRICITION
FP2005DG	A, P, E	B, S, E	TONGUE BUCKLES
FP2005BD*	A, P, E	B, S, E	BAYONET
FP2005BDG*	A, P, E	B, S, E	TONGUE BUCKLES
FP2006BD	A, D, L, E, P	B, S, E, F	BAYONET

CLASS (Legend)

- A - Fall Arrest • P - Work Positioning
- D - Suspension & descent • L - Ladder Climbing
- E - Confined Spaces

Metalic D-ring

- F - Front • B - Back (adjustable) • S - Sides or hips
- E - Shoulders • L - Chest strap buckle • X - Extension (d-ring)

* Bayonet style connector on adjustable chest strap

FALL PROTECTION



Hybrid Econo Harnesses

BASIC, ECONOMICAL AND FULLY ADJUSTABLE HARNESSES WITH 5 POINT ADJUSTMENT



CERTIFIED BY CSA CANADA

This product is the answer to a demand for a basic harness adjustable at the torso. While being called a basic harness, it offers the user everything a regular mid range harness has to offer at a budget price. Available in sizes Regular and Extra Large. These harness meet and exceeds the ANSI and OSHA regulations and is CSA certified.



FP2501D



FP2503DG




FP2505D




FALL ARREST HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP2501D	A	B	FRICITION
FP2501DG	A	B	TONGUE BUCKLES



WORK POSITIONING HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP2503D	A, P	B, S	FRICITION
FP2503DG	A, P	B, S	TONGUE BUCKLES



WORK POSITIONING & CONFINED SPACES HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP2505D	A, P, E	B, S, E	FRICITION
FP2505DG	A, P, E	B, S, E	TONGUE BUCKLES

CLASS (Legend)

A - Fall Arrest • P - Work Positioning • D - Suspension & descent • L - Ladder Climbing • E - Confined Spaces

Metalic D-ring

F - Front • B - Back (adjustable) • S - Sides or hips • E - Shoulders • L - Chest strap buckle
X - Extension (d-ring)

B-Compliant Harnesses

BASIC ECONOMICAL HARNESS
3 POINT ADJUSTMENT



CERTIFIED BY CSA CANADA

This design configuration of harness gives the occasional user a quality product that offers protection as all other harnesses but at an economical price. It is made with high quality polyester webbing with adjustable leg straps. The harness offers maximum comfort, resistance to UV rays and most chemicals. All of it at an economical price more than reasonable. Available in sizes Regular and Extra Large. These harnesses meet and exceeds the ANSI and OSHA regulations and is CSA certified.



FP4001D



FP4003DG



FP4003SD




FP4005DG




FALL ARREST HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP4001D	A	B	FRICTION
FP4001DG	A	B	TONGUE BUCKLES



WORK POSITIONING HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP4003DG	A, P	B, S	TONGUE BUCKLES
FP4003D	A, P	B, S	FRICTION



WORK POSITIONING & CONFINED SPACES HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP4005D	A, P, E	B, S, E	FRICTION
FP4005DG	A, P, E	B, S, E	TONGUE BUCKLES

CLASS (Legend)

A - Fall Arrest • P - Work Positioning • D - Suspension & descent • L - Ladder Climbing • E - Confined Spaces

Metalic D-ring

F - Front • B - Back (adjustable) • S - Sides or hips • E - Shoulders • L - Chest strap buckle
X - Extension (d-ring)

Dyna-Tower Harnesses

VEST STYLE HARNESS WITH INTEGRATED SHOULDER AND LEG PAD, PERMANENT ATTACHED BELT WITH LUMBAR SUPPORT AND OPTIONAL SADDLE OR WORKSEAT. ALL ALUMINUM HARDWARE.



CERTIFIED BY CSA CANADA

Dyna-Tower harness were designed specifically for the tower industry where comfort, fit and weight are very important. The intergrated breathable comfort pad is a perfect size to maximize comfort without causing unecessary heat zones. All the hardware is aluminum removing all unecessary weight which make them lighter than traditional harnesses. The Dyna-Tower harnesses have removable saddle or work seat which provides additional comfort when working at heights for longer period of times. There are two d-rings on the front for ultimate verstility when connecting to ladder systems or rescue/rope access devices. The intergrated belt provides comfort when in work positioning but is specifically designed to ensure proper load transfer from the belt to the harness to maximize the load distribution to the body. It also has trauma straps on both sides to provide time in a rescue situation. These harnesses are certified to CSA class ADPL. They also meet and exceed ANSI and OSHA regulations.




FPT05DDC



FPT07DSC



FPT07DWD



WORK POSITIONING & CONFINED SPACES HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
WITH INTEGRATED BELT			
FPT04DDC	A, P, L	F, B, S (2)	ALUMINUM BAYONET
FPT04DDD	A, P, L	F, B, S (2)	TONGUE BUCKLES
FPT05DDC	A, P, L	F (2), B, S (2)	ALUMINUM BAYONET
FPT05DDD	A, P, L	F (2), B, S (2)	TONGUE BUCKLES
WITH INTEGRATED SADDLE			
FPT07DSC	A, P, L, D	F (2), B, S (2), SADDLE (2)	ALUMINUM BAYONET
FPT07DSD	A, P, L, D	F (2), B, S (2), SADDLE (2)	TONGUE BUCKLES
WITH INTEGRATED WORK SEAT			
FPT07DWC	A, P, L, D	F (2), B, S (2), WORK SEAT (2)	ALUMINUM BAYONET
FPT07DWD	A, P, L, D	F (2), B, S (2), WORK SEAT (2)	TONGUE BUCKLES

CLASS (Legend)

A - Fall Arrest • P - Work Positioning • D - Suspension & descent • L - Ladder Climbing • E - Confined Spaces

Metalic D-ring

F - Front • B - Back (adjustable) • S - Sides or hips • E - Shoulders • L - Chest strap buckle
X - Extension (d-ring)


Y-Trend Harnesses

SUSPENSION HARNESS WITH INTEGRATED SHOULDER AND LEG PAD. PERMANENT ATTACHED BELT WITH LUMBAR SUPPORT. ALL ALUMINUM HARDWARE.



CERTIFIED BY CSA CANADA

Y-Trend harness were designed for rope access and rescue. The integrated breathable comfort pad is a perfect size to maximize comfort without causing unnecessary heat zones. All hardware is aluminum making this harness one of the lightest on the market. The bottom of the Y-Trend harness has been specifically designed so that the user can suspend in the harness naturally for long period of times while staying comfortable. The top of the Y-Trend harness has a unique configuration which makes the harness intuitive to don and eliminating the need to step into the harness and pull over like traditional harness on the market. It also has trauma straps on both sides to provide time in a rescue situation. These harnesses are CSA certified class ADPLE. They also meet and exceed ANSI and OSHA regulations.



SUSPENSION, WORK POSITIONING & CONFINED SPACE

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPY05DFF	A, P, L, D	F, B, S	ALUMINUM BAYONET
FPY05DFH	A, P, L, D	F, B, S	TONGUE BUCKLES



FPY05DFH


V-Trend Harnesses

SUSPENSION HARNESS WITH INTEGRATED SHOULDER AND LEG PAD. PERMANENT ATTACHED BELT WITH LUMBAR SUPPORT. ALL ALUMINUM HARDWARE.



CERTIFIED BY CSA CANADA

V-Trend harness is designed for rope access and rescue. The integrated breathable comfort pad is a perfect size to maximize comfort without causing unnecessary heat zones. All hardware is aluminum making this harness one of the lightest on the market. The bottom of the V-trend harness has been specifically designed so that the user can suspend in the harness naturally for long period of times while staying comfortable. The top of the V-Trend harness has a unique configuration which makes the harness intuitive to don and eliminating the need to step into the harness and pull over like traditional harness on the market. It also has trauma straps on both sides to provide time in a rescue situation. These harnesses are CSA certified class ADPLE. They also meet and exceed ANSI and OSHA regulations.



SUSPENSION, WORK POSITIONING & CONFINED SPACE

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPW06D	A, P, L, D	F, B, S, BELT	ALUMINUM BAYONET
FPW06DG	A, P, L, D	F, B, S, BELT	TONGUE BUCKLES



FPW06D

CLASS (Legend)

A - Fall Arrest • **P** - Work Positioning
D - Suspension & descent • **L** - Ladder Climbing
E - Confined Spaces

Metalic D-ring

F - Front • **B** - Back (adjustable) • **S** - Sides or hips
E - Shoulders • **L** - Chest strap buckle • **X** - Extension (d-ring)

Easy Don X-Trend Aluminium Harnesses

EASY TO DON X-TREND HARNESS WITH INTERGRATED SHOULDER AND LEG PADS. 4 POINTS OF ADJUSTMENT. ALL ALUMINUM HARDWARE.



CERTIFIED BY CSA CANADA

Dynamic Easy Don X-Trend Aluminium harness is designed for comfort eliminating all unnecessary weight and bulkiness in both padding and hardware. The harness has been optimized to ensure more intuitive donning allowing the customer to adjust and put on the harness with ease. With all the hardware made out of aluminum, the overall weight of the harness is reduced by 25% and provides ultimate corrosion resistance making this harness ideal for those working in highly corrosive environments. The Dynamic back pad focuses on comfort while relieving pressure point at all the right places such as your shoulders and the back of the legs. The minimalistic pad eliminates heat zones, weight and reduces the overall bulkiness of the harness making this harness one of the most comfortable harness you will wear. It also has trauma straps on both sides to provide time in a rescue situation. These harnesses meet and exceeds the ANSI and OSHA regulations and is CSA certified.



FALL ARREST HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPV01D	A	B	ALUMINUM BAYONET
FPV01DG	A	B	TONGUE BUCKLES

FALL ARREST HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPV02D	A, D, L	F, B	ALUMINUM BAYONET
FPV02DG	A, D, L	F, B	TONGUE BUCKLES

WORK POSITIONING & CONFINED SPACES HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPV04D	A, D, L, P	F, B, S	ALUMINUM BAYONET
FPV04DG	A, D, L, P	F, B, S	TONGUE BUCKLES
FPV04SD	A, D, L, E	F, B, E	ALUMINUM BAYONET
FPV04SDG	A, D, L, E	F, B, E	TONGUE BUCKLES
FPV06D	A, D, E, L, P	F, B, S, E	ALUMINUM BAYONET
FPV06DG	A, D, E, L, P	F, B, S, E	TONGUE BUCKLES

CLASS (Legend)

A - Fall Arrest • P - Work Positioning • D - Suspension & descent • L - Ladder Climbing • E - Confined Spaces

Metalic D-ring

F - Front • B - Back (adjustable) • S - Sides or hips • E - Shoulders • L - Chest strap buckle
X - Extension (d-ring)



FPV02D



FPV04DG

Miss Dyna Harness

TRADITIONAL X-TREND HARNESS WITH 4 POINTS OF ADJUSTMENT.



CERTIFIED BY CSA CANADA

Miss Dyna Harness provides larger range of movement than traditional H-Style harnesses. It is ideal for female workers where the H-Style harness does not fit properly around the chest. It is also optimal harness for ladder climbing as there is less slack with the front D-Ring vs H-Style harnesses. It also has trauma straps on both sides to provide time in a rescue situation. These harnesses meet and exceeds the ANSI and OSHA regulations and is CSA certified.


Miss **DYNA**



FPVW02D


FALL ARREST HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPVW02D	A, D, L	F, B	ALUMINUM BAYONET
FPVW02DG	A, D, L	F, B	TONGUE BUCKLE



WORK POSITIONING & CONFINED SPACES HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPVW04D	A, D, L, P	F, B, S	ALUMINUM BAYONET
FPVW04DG	A, D, L, P	F, B, S	TONGUE BUCKLE



CLASS (Legend)

A - Fall Arrest • P - Work Positioning • D - Suspension & descent • L - Ladder Climbing • E - Confined Spaces

Metalic D-ring

F - Front • B - Back (ajustable) • S - Sides or hips • E - Shoulders • L - Chest strap buckle
X - Extension (d-ring)

Easy Don X-Trend Harnesses

EASY TO DON X-TREND HARNESS WITH INTERGRATED SHOULDER AND LEG PADS. 4 POINTS OF ADJUSTMENT.



CERTIFIED BY CSA CANADA

Dynamic Easy Don X-Trend harness is designed for comfort and ease of donning. The harness has been optimized to ensure more intuitive donning allowing the customer to adjust and put on the harness with ease. The Dynamic back pad focuses on comfort while relieving pressure point at all the right places such as your shoulders and the back of the legs. The minimalistic pad eliminates heat zones, weight and reduces the overall bulkiness of the harness making this harness one of the most comfortable harness you will wear. It also has trauma straps on both sides to provide time in a rescue situation. These harnesses meet and exceeds the ANSI and OSHA regulations and is CSA certified.



FPU02D




FPU04DG




FALL ARREST HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPU01D	A	B	BAYONET
FPU01DG	A	B	TONGUE BUCKLES



FALL ARREST HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPU02D	A, D, L	F, B	BAYONET
FPU02DG	A, D, L	F, B	TONGUE BUCKLES



WORK POSITIONING & CONFINED SPACES HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPU04D	A, D, L, P	F, B, S	BAYONET
FPU04DG	A, D, L, P	F, B, S	TONGUE BUCKLES
FPU04SD	A, D, L, P	F, B, S	BAYONET
FPU04SDG	A, D, L, P	F, B, S	TONGUE BUCKLES
FPU06D	A, D, E, L, P	F, B, S, E	BAYONET
FPU06DG	A, D, E, L, P	F, B, S, E	TONGUE BUCKLES

CLASS (Legend)

A - Fall Arrest • P - Work Positioning • D - Suspension & descent • L - Ladder Climbing • E - Confined Spaces

Metalic D-ring

F - Front • B - Back (adjustable) • S - Sides or hips • E - Shoulders • L - Chest strap buckle
X - Extension (d-ring)

X-Trend Harnesses

TRADITIONAL X-TREND HARNESS WITH 4 POINTS OF ADJUSTMENT.



CERTIFIED BY CSA CANADA

Light and easy to put on "X-TREND" harness is available in two configurations. These harnesses offer the user easy adjustment, since it does not have a chest strap. The "X-TREND" harness is made out of polyester webbing, it also has a sub-pelvic strap that distributes the forces in case of a fall. Available in sizes Regular and Extra Large. These harnesses meet and exceeds the ANSI and OSHA regulations and is CSA certified.




FP3002D



FP3006D




FP3004D



FALL ARREST HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP3001DG	A	B	TONGUE BUCKLE
FP3002D	A, D, L	F, B	FRICTION
FP3002DG	A, D, L	F, B	TONGUE BUCKLE



WORK POSITIONING & CONFINED SPACES HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP3004D	A, P, D, L	F, B, S	FRICTION
FP3004SD	A, D, L, E	F, B, E	FRICTION
FP3004DG	A, D, L, P	F, B, S	TONGUE BUCKLE
FP3006D	A, D, E, L, P	F, B, S, E	FRICTION
FP3006DG	A, D, E, L, P	F, B, S, E	TONGUE BUCKLE

CLASS (Legend)

A - Fall Arrest • P - Work Positioning • D - Suspension & descent • L - Ladder Climbing • E - Confined Spaces

Metallic D-ring

F - Front • B - Back (adjustable) • S - Sides or hips • E - Shoulders • L - Chest strap buckle
X - Extension (d-ring)

Kevlar Harnesses

HARNESSES FOR WELDERS, ELECTRICIAN AND FOR CONFINED SPACES



CERTIFIED BY CSA CANADA

The Dyna-1FR Welders harnesses is made of Kevlar® webbing which offers the maximum protection against cuts, abrasion and high heat resistance caused by sparks and flames while giving you maximum protection in case of a fall. The Dyna1FR Electrician harness is made out of Kevlar® and offers maximum protection against cuts, abrasions and high heat due to electrical sparks or flashes. The metal components are all coated which makes the harness completely dielectric.

Available in sizes Regular and Extra Large. These harnesses meet and exceed the AANSI and OSHA regulations and ASTM F887 Arc Flash and is CSA Certified.



FPK2001BD



FPK2003BD




FPE2003SD

FALL ARREST HARNESSES




PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
<i>HARNESSES FOR WELDER'S "DYNA-1FR"</i>			
FPK2001BD	A	B	BAYONET
<i>HARNESSES FOR ELECTRICIAN "DYNA-1FR"</i>			
FPE2001D	A	B	FRICTION

WORK POSITIONING HARNESSES



PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
<i>HARNESSES FOR WELDER'S "DYNA-1FR"</i>			
FPK2003BD	A, P	B, S	BAYONET
<i>HARNESSES FOR ELECTRICIAN "DYNA-1FR"</i>			
FPE2003D	A, P	B, S	FRICTION

WORK POSITIONING & CONFINED SPACES & LADDER CLIMBING HARNESSES



PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
<i>HARNESSES FOR WELDER'S "DYNA-1FR"</i>			
FPK2002BD	A, L	B, F	BAYONET
FPK2005BD	A, P, E	B, S, E	BAYONET
FPK2005BDG	A, P, E	B, S, E	TONGUE BUCKLES
FPK2006BD	A, P, E, L	B, F, S, E	BAYONET
<i>HARNESSES FOR ELECTRICIAN "DYNA-1FR"</i>			
FPE2003SD	A, E	B, E	FRICTION
FPE2005D	A, P, E	B, S, E	FRICTION

CLASS (Legend)

A - Fall Arrest • P - Work Positioning • D - Suspension & descent • L - Ladder Climbing • E - Confined Spaces

Metallic D-ring

F - Front • B - Back (adjustable) • S - Sides or hips • E - Shoulders • L - Chest strap buckle
X - Extension (d-ring)

Dyna-I Coated Harnesses

VEST STYLE WITH 5 POINT ADJUSTMENT AND TPU COATED WEBBING FOR EXTRA DURABILITY.



CERTIFIED BY CSA CANADA

Dyna-I coated harness is protected by a TPU coating that provides resistance to abrasion, weld splatter, chemicals, paint, grease and dirt. The harness can be wiped clean with water making it easier to inspect and prolonging the life of the harness while reducing the frequency of replacement. Ideal harness for dirty environments and clean environments as well. The harness also has trauma straps on both sides to provide time in a rescue situation. These harness meet and exceeds the ANSI and OSHA regulations and is CSA certified.



FPC2001BD

FPC2003BDG

FPUPAD


FALL ARREST HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPC2001BD	A	B	BAYONET
FPC2001BDG	A	B	TONGUE BUCKLES




WORK POSITIONING HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPC2003BD	A, P	B, S	BAYONET
FPC2003BDG	A, P	B, S	TONGUE BUCKLES



WORK POSITIONING & CONFINED SPACES HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPC2005BD	A, P, E	B, S, E	BAYONET
FPC2005BDG	A, P, E	B, S, E	TONGUE BUCKLES



SHOULDER AND LEG PAD

PART NO.	DESCRIPTION
FPUPAD	OPTIONAL SHOULDER / LEG PADDING WITH VELCRO MAKING IT EASY TO ADD TO THE HARNESS - SOLD BY PAIR

Arborist Harnesses

SUSPENSION HARNESS WITH INTEGRATED SHOULDER AND LEG PAD. PERMANENT ATTACHED BELT WITH LUMBAR SUPPORT. ALL ALUMINUM HARDWARE.



CERTIFIED BY CSA CANADA

Y-Trend harnesses were designed for rope access and rescue. The integrated breathable comfort pad is a perfect size to maximize comfort without causing unnecessary heat zones. All hardware is aluminum, making this harness one of the lightest on the market. The bottom of the Y-Trend harness has been specifically designed so that the user can suspend in the harness naturally for long periods of time while staying comfortable. The top of the Y-Trend harness has a unique configuration which makes the harness intuitive to don and eliminating the need to step into the harness and pull over like traditional harness on the market. These harnesses are CSA certified class ADPLE. They also meet and exceed ANSI and OSHA regulations.




FPJ04D

FPJRB

ARBORIST HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPJ04D	A, P, D, L	B, S, F	ALUMINIUM BAYONET



REPLACEMENT BRIDGE

PART NO.	DESCRIPTION
FPJRB	REPLACEMENT BRIDGE

CLASS (Legend)

A - Fall Arrest • P - Work Positioning • D - Suspension & descent
L - Ladder Climbing • E - Confined Spaces

Metalic D-ring

F - Front • B - Back (ajustable) • S - Sides or hips • E - Shoulders
L - Chest strap buckle • X - Extension (d-ring)

FALL PROTECTION



Anti Corrosion Harnesses

BASIC, ECONOMICAL AND FULLY ADJUSTABLE HARNESSES WITH PVC COATED HARDWARE



CERTIFIED BY CSA CANADA

The Dynamic anti corrosion harness is design with all PVC coated hardware that will provide ultimate protection for highly corrosive environments. It also has trauma straps on both sides to provide time in a rescue situation. These harness meet and exceeds the ANSI and OSHA regulations and is CSA certified.



FPD2501D

FPD2505D


FALL ARREST HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPD2501D	A	B	FRICTION




WORK POSITIONING HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPD2503D	A, P	B, S	FRICTION
FPD2503SD	A, E	B, E	FRICTION



WORK POSITIONING & CONFINED SPACES HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPD2505D	A, P, E	B, S, E	FRICTION



Dyna-Viz Harnesses

REFLECTIVE WEBBING 5-POINT ADJUSTMENT HARNESS

MADE FROM CSA CERTIFIED COMPONENTS

The Dynamic "DYNA-VIZ" harness is designed with an orange webbing with reflective striping down the center to provide high visibility in low light. It also has trauma straps on both sides to provide time in a rescue situation.



FP25R1D

FALL ARREST HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP25R1D	A	B	FRICTION
FP25R3D	A, P	B, S	FRICTION
FP25R5D	A, P, E	B, S, E	FRICTION



CLASS (Legend)

A - Fall Arrest • P - Work Positioning • D - Suspension & descent • L - Ladder Climbing • E - Confined Spaces

Metalic D-ring

F - Front • B - Back (adjustable) • S - Sides or hips • E - Shoulders • L - Chest strap buckle
X - Extension (d-ring)

Construction Pro Harness

VEST STYLE WITH 5 POINT ADJUSTMENT WITH INTERGRATED TOOL BELT THAT IS DESIGNED TO BREAK AWAY.



CERTIFIED BY CSA CANADA

All Aluminum hardware reducing the overall weight by 25%. Aluminum hardware also performs better in corrosive environments and is just as strong as steel. Integrated Shoulder pad optimized to reduce heat zones, bulkiness and weight and ½" wide reflective stripe for visibility in low light conditions. The tool belt is made out of stronger material that would bear the weight of heavy tool pouches with optimized comfort from a leather lumbar support. Belt design is unique as it has a "Break Away" Tool Belt feature so that in the event of a fall, the forces are not transferred to the belt causing injury to the abdominal region. It also has trauma straps on both sides to provide time in a rescue situation. These harnesses meet and exceed the ANSI and OSHA regulations and is CSA certified.



FPMX101D0DR




FALL ARREST HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPMX101D0DR	A	B	ALUMINUM BAYONET
FPMX1G1D0DR	A	B	TONGUE BUCKLES

WORK POSITIONING HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPMX101D2DR	A, P	B, S (ON BELT)	ALUMINUM BAYONET
FPMX103D0DR	A, P	B, S	ALUMINUM BAYONET
FPMX1G1D2DR	A, P	B, S (ON BELT)	TONGUE BUCKLES
FPMX1G3D0DR	A, P	B, S	TONGUE BUCKLES



Construction Harness Eco

VEST STYLE WITH 5 POINT ADJUSTMENT



CERTIFIED BY CSA CANADA

Removable shoulder pad optimized to reduce heat zones, bulkiness and weight. The tool belt has stronger belt material with padding that would bear the weight of heavy tool pouches. Grommets options make it easier to adjust and readjust as necessary for different weather conditions.



FPM5G3D0DC




FALL ARREST HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPM501D0DC	A	B	FRICTION
FPM5G1D0DC	A	B	TONGUE BUCKLES

WORK POSITIONING HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPM503D0DC	A, P	B, S (ON BELT)	FRICTION
FPM5G3D0DC	A, P	B, S	TONGUE BUCKLES



CLASS (Legend)

A - Fall Arrest • P - Work Positioning • D - Suspension & descent • L - Ladder Climbing • E - Confined Spaces

Metalic D-ring

F - Front • B - Back (adjustable) • S - Sides or hips • E - Shoulders • L - Chest strap buckle
X - Extension (d-ring)

Harnesses Combo

WITH BELT AND LUMBAR SUPPORT

MADE FROM CSA COMPONENTS

Harness with back lumbar support provides the user with ultimate comfort and support for the lower back. The belt can also be utilized as a tool belt to ensure the weight is properly distributed to the body. Other combination of harnesses and belt can be made upon request.



FPM101D



FPM2G3D




FPM253D



FALL ARREST HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPM101D	A, P, E	B	BAYONET
FPM201D	A, P, E	B	BAYONET
FPM251D	A, P, E	B	FRICTION



WORK POSITIONING HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPM103D	A, P	B, S	BAYONET
FPM203D	A, P	B, S	BAYONET
FPM253D	A, P	B, S	FRICTION
FPM1G1D	A	B	TONGUE BUCKLES
FPM2G1D	A	B	TONGUE BUCKLES
FPM5G1D	A	B	TONGUE BUCKLES
FPM1G3D	A, P	B, S	TONGUE BUCKLES
FPM2G3D	A, P	B, S	TONGUE BUCKLES
FPM5G3D	A, P	B, S	TONGUE BUCKLES

CLASS (Legend)

A - Fall Arrest • **P** - Work Positioning • **D** - Suspension & descent • **L** - Ladder Climbing • **E** - Confined Spaces

Metalic D-ring

F - Front • **B** - Back (adjustable) • **S** - Sides or hips • **E** - Shoulders • **L** - Chest strap buckle
X - Extension (d-ring)

Industrial Body Belts



CERTIFIED BY CSA CANADA



FP5000D



FP5001D



FP5002D



FP51001D



FP51001ED



FP52001D



FP53001D



FP500



FP550

Made of polyester webbing 1 3/4 " (45cm) they are light and comfortable. Ideal for travel restraint and for certain work positioning functions. Our belts meets and exceeds ANSI, OSHA regulations and are CSA certified.

Important: Do not use if there is a potential danger for falls.

Our industrial belts are available in 4 sizes : Small, Medium, Large and X-Large (Extra-Small and XX-large can be made on request). See sizing references on page 3 of this catalogue.

PART NO.	DESCRIPTION	D-RING(S)
FP5000D	TOOL BELT	0
FP5001D	TRAVEL RESTRAINT BELT	1
FP5002D	WORK POSITIONING BELT	2

Miner's Belt



CERTIFIED BY CSA CANADA

Our miner's belts are made to be tough, comfortable and user friendly. They are made out of 2" (50cm) strong polyester webbing highly resistant to UV rays and most chemicals.

The battery straps and rescue straps are made of extra strong belting material highly resistant to abrasion and humidity.

Important: Do not use if there is a potential danger for falls.

Our miner's belts are available in 4 sizes Small, Medium, Large and X-Large(Extra-small and XX-large can be made on request).

PART NO.	DESCRIPTION	D-RING(S)
FP51001D*	MADE OF TIGHT WEAVE POLYESTER 2"(50CM) WEBBING WITH (1) BATTERY STRAP REINFORCED AND REMOVABLE	1
FP51001ED*	MADE OF TIGHT WEAVE POLYESTER 2"(50CM) WEBBING (1) REMOVABLE LAMP BATTERY STRAP WITH REINFORCEMENT UNDER STRAP AREA AND (1) EXTENDED D RING	1
FP52001D*	MADE OF TIGHT WEAVE POLYESTER 2" (50CM) WEBBING WITH (1) BATTERY STRAP REINFORCED AND REMOVABLE PLUS (1) FIXED RESCUE STRAP	1
FP53001D*	MINE SAFETY RESCUE BELT NO BATTERY STRAPS	1

* Available in size from 28" to 56". Made on orders with 15 days delivery and surcharge of 10%.

LUMBAR SUPPORT FOR INDUSTRIAL & MINER'S BELTS

PART NO.	DESCRIPTION
FP500	LUMBAR SUPPORT FOR BELT - BLACK COLOR
FP550	DELUXE LUMBAR SUPPORT WITH PADDING COLOR: RED OUTSIDE AND BLACK INSIDE

FALL PROTECTION



Personal Self-Retracting Devices (SRL)



CERTIFIED BY CSA CANADA

Our personal self retracting devices are made with 1" Dyneema webbing and the device housing can be connected to the harness or to the anchor. These unit are available in both single and double leg units. All of them meet and exceed ANSI, OSHA and is CSA certified as a fall Arrest type 1. RATED FOR 310LBS WEIGHT CAPACITY.

SINGLE LEG SELF-RETRACTING LIFELINE CLASS SRL

PART NO.	LANYARD MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
FP1-101W	DYNEEMA	TRIPLE ACTION CARABINER	SNAP HOOK	6 FT (1.82 M)
FP1-101WA	DYNEEMA	TRIPLE ACTION CARABINER	REBAR HOOK	6 FT (1.82 M)
FP1-101WB	DYNEEMA	TRIPLE ACTION CARABINER	SCAFFOLD HOOK	6 FT (1.82 M)
FP1-101WC	DYNEEMA	TRIPLE ACTION CARABINER	ALUM SCAFFOLD HOOK	6 FT (1.82 M)
FP1-102W	DYNEEMA	TRIPLE ACTION CARABINER	SNAP HOOK	7 FT (2.15 M)
FP1-102WA	DYNEEMA	TRIPLE ACTION CARABINER	REBAR HOOK	7 FT (2.15 M)
FP1-102WB	DYNEEMA	TRIPLE ACTION CARABINER	SCAFFOLD HOOK	7 FT (2.15 M)
FP1-102WC	DYNEEMA	TRIPLE ACTION CARABINER	ALUM SCAFFOLD HOOK	7 FT (2.15 M)

DOUBLE LEG SELF-RETRACTING LIFELINE CLASS SRL

PART NO.	LANYARD MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
FP1-102DW	DYNEEMA	TRIPLE ACTION CARABINER	SNAP HOOK (2)	7 FT (2.15 M)
FP1-102DWA	DYNEEMA	TRIPLE ACTION CARABINER	REBAR HOOK (2)	7 FT (2.15 M)
FP1-102DWB	DYNEEMA	TRIPLE ACTION CARABINER	SCAFFOLD HOOK (2)	7 FT (2.15 M)
FP1-102DWC	DYNEEMA	TRIPLE ACTION CARABINER	ALUM SCAFFOLD HOOK (2)	7 FT (2.15 M)

SINGLE LEG SELF-RETRACTING LIFELINE CLASS SRL

PART NO.	LANYARD MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
FP2-203W	DYNEEMA	SNAP HOOK	TRIPLE ACTION CARABINER	11 FT (3.4 M)
FP2-203WA	DYNEEMA	SNAP HOOK	REBAR HOOK	11 FT (3.4 M)
FP2-203WB	DYNEEMA	SNAP HOOK	SCAFFOLD HOOK	11 FT (3.4 M)
FP2-203WC	DYNEEMA	SNAP HOOK	ALUM SCAFFOLD HOOK	11 FT (3.4 M)
F2-206W	DYNEEMA	SNAP HOOK	TRIPLE ACTION CARABINER	20 FT (6.1 M)



FP1-101W

FP1-102DW

FP1-102W

FP2-203W

FP2-206W

Please refer to page 33 for hardware details.

Snap Hook - FP6650HS
 Rebar Hook - FP5386HS
 Scaffold Hook - FP5395HS

Alum Scaffold - FP5395ALL
 Triple Action Carabineer - FP244

Personal Self-Retracting Devices Leading Edge (SRL-LE)



CERTIFIED BY CSA CANADA

Our personal self retracting devices are made with 1" Dyneema webbing and the device housing can be connected to the harness or to the anchor. These unit are available in both single and double leg units. All of them meet and exceed ANSI, OSHA and is CSA certified as a fall Arrest type 1. RATED FOR 310LBS WEIGHT CAPACITY.

SINGLE LEG SELF-RETRACTING LIFELINE CLASS SRL-LE

PART NO.	LANYARD MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
FP1-101WLE	DYNEEMA	TRIPLE ACTION CARABINER	SNAP HOOK	6 FT (1.82 M)
FP1-101WALE	DYNEEMA	TRIPLE ACTION CARABINER	REBAR HOOK	6 FT (1.82 M)
FP1-101WBLE	DYNEEMA	TRIPLE ACTION CARABINER	SCAFFOLD HOOK	6 FT (1.82 M)
FP1-101WCLE	DYNEEMA	TRIPLE ACTION CARABINER	ALUM SCAFFOLD HOOK	6 FT (1.82 M)
FP1-102WLE	DYNEEMA	TRIPLE ACTION CARABINER	SNAP HOOK	7 FT (2.15 M)
FP1-102WALE	DYNEEMA	TRIPLE ACTION CARABINER	REBAR HOOK	7 FT (2.15 M)
FP1-102WBLE	DYNEEMA	TRIPLE ACTION CARABINER	SCAFFOLD HOOK	7 FT (2.15 M)
FP1-102WCLE	DYNEEMA	TRIPLE ACTION CARABINER	ALUM SCAFFOLD HOOK	7 FT (2.15 M)

DOUBLE LEG SELF-RETRACTING LIFELINE CLASS SRL-LE

PART NO.	LANYARD MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
FP1-102DWLE	DYNEEMA	TRIPLE ACTION CARABINER	SNAP HOOK (2)	7 FT (2.15 M)
FP1-102DWALE	DYNEEMA	TRIPLE ACTION CARABINER	REBAR HOOK (2)	7 FT (2.15 M)
FP1-102DWBLE	DYNEEMA	TRIPLE ACTION CARABINER	SCAFFOLD HOOK (2)	7 FT (2.15 M)
FP1-102DWCLE	DYNEEMA	TRIPLE ACTION CARABINER	ALUM SCAFFOLD HOOK (2)	7 FT (2.15 M)

SINGLE LEG SELF-RETRACTING LIFELINE CLASS SRL-LE

PART NO.	LANYARD MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
FP2-203WLE	DYNEEMA	SNAP HOOK	TRIPLE ACTION CARABINER	11 FT (3.4 M)
FP2-203WALE	DYNEEMA	SNAP HOOK	REBAR HOOK	11 FT (3.4 M)
FP2-203WBLE	DYNEEMA	SNAP HOOK	SCAFFOLD HOOK	11 FT (3.4 M)
FP2-203WCLE	DYNEEMA	SNAP HOOK	ALUM SCAFFOLD HOOK	11 FT (3.4 M)
F2-206WLE	DYNEEMA	SNAP HOOK	TRIPLE ACTION CARABINER	20 FT (6.1 M)

Please refer to page 33 for hardware details.

Snap Hook - FP6650HS

Rebar Hook - FP5386HS

Scaffold Hook - FP5395HS

Alum Scaffold - FP5395ALL

Triple Action Carabineer - FP244

Self-Retracting Devices (SRD)



CERTIFIED BY CSA CANADA

All Aluminum SRL with composite casing. They all come with 3/16" (5 mm) galvanized wire cable. Certified to CSA and meet and exceed ANSI and OSHA. RATED FOR 310LBS WEIGHT CAPACITY AND APPROVED FOR LEADING EDGE APPLICATIONS.



SELF-RETRACTING LIFELINES CLASS SRL

PART NO.	LIFELINE MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	WEIGHT	LENGTH
FP2AA06C	GALVANIZED CABLE	SWIVEL HOOK	TRIPLE ACTION CARABINER		20 FT (6.1M)
FP2AA10C	GALVANIZED CABLE	SWIVEL HOOK (WITH LOAD INDICATOR)	CARABINER	14.5 LB (6.5 KG)	32.5 FT (10 M)
FP2AA15C	GALVANIZED CABLE	SWIVEL HOOK (WITH LOAD INDICATOR)	CARABINER	19 LB (8.6 KG)	50 FT (15 M)
FP2AA33C	GALVANIZED CABLE	SWIVEL HOOK (WITH LOAD INDICATOR)	CARABINER	28.7 LB (13 KG)	100 FT (33 M)

SELF-RETRACTING LIFELINE CLASS SRL-LE

PART NO.	LIFELINE MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	WEIGHT	LENGTH
FP2AA06CLE	GALVANIZED CABLE	SNAP HOOK TRIPLE ACTION	CARABINER		20 FT (6.1M)
FP2AA10CLE	GALVANIZED CABLE	SWIVEL HOOK (WITH LOAD INDICATOR)	CARABINER	14.5 LB (6.5 KG)	32.5 FT (10 M)
FP2AA15CLE	GALVANIZED CABLE	SWIVEL HOOK (WITH LOAD INDICATOR)	CARABINER	14.5 LB (6.5 KG)	32.5 FT (10 M)
FP2AA33CLE	GALVANIZED CABLE	SWIVEL HOOK (WITH LOAD INDICATOR)	CARABINER	14.5 LB (6.5 KG)	32.5 FT (10 M)

SELF-RETRACTING LIFELINES WITH INTEGRATED RETRIEVAL WINCH CLASS SRL-R

PART NO.	LIFELINE MATERIAL	RETRIEVAL WINCH	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	WEIGHT	LENGTH
FP3AA15CR	GALVANIZED CABLE	3 WAY	SWIVEL HOOK (WITH LOAD INDICATOR)	CARABINER	18 LBS (8 KG)	50 FT (15 M)
FP3AA33CR	GALVANIZED CABLE	3 WAY	SWIVEL HOOK (WITH LOAD INDICATOR)	CARABINER	32.6 LB (14.8 KG)	100 FT (33 M)

SELF-RETRACTING LIFELINE WITH INTERGRATED RETRIEVAL WINCH CLASS SRL-R-LE

PART NO.	LIFELINE MATERIAL	RETRIEVAL WINCH	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	WEIGHT	LENGTH
FP3AA15CRLE	GALVANIZED CABLE	3 WAY	SWIVEL HOOK (WITH LOAD INDICATOR)	CARABINER	18 LBS (8 KG)	50 FT (15 M)
FP3AA33CRLE	GALVANIZED CABLE	3 WAY	SWIVEL HOOK (WITH LOAD INDICATOR)	CARABINER	32.6 LB (14.8 KG)	100 FT (33 M)

Please refer to page 33 for hardware details.

Swivel Hook - FP4651
Triple Action Carabiner - FP244

Rope & Web Lanyards



CERTIFIED BY CSA CANADA

3-STRAND NYLON ROPE LANYARD

This type of lanyard is almost exclusively used for travel restraint.

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
FP61111/4	3-STRAND NYLON OF (5/8") 16 MM	SNAP HOOK	SNAP HOOK	4-5-6 FT
FP61113/4	3-STRAND NYLON OF (5/8") 16 MM	SNAP HOOK	REBAR HOOK	4-5-6 FT
FP61114/4	3-STRAND NYLON OF (5/8") 16 MM	SNAP HOOK	SCAFFOLD HOOK	4-5-6 FT

FIXED AND ADJUSTABLE LENGTH WEB LANYARDS WITHOUT ENERGY ABSORBERS

This lanyard is designed for travel restraint.

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
SINGLE LEG FIXED LANYARDS				
FP63101/4	1" POLYESTER WEBBING	SEWN LOOP	SNAP HOOK	4-5-6 FT
FP63111/4	1" POLYESTER WEBBING	SNAP HOOK	SNAP HOOK	4-5-6 FT
FP63113/4	1" POLYESTER WEBBING	SNAP HOOK	REBAR HOOK	4-5-6 FT
FP63114/4	1" POLYESTER WEBBING	SNAP HOOK	SCAFFOLD HOOK	4-5-6 FT

SINGLE LEG AJUSTABLE LANYARDS

FP63211/6	1" POLYESTER WEBBING	SNAP HOOK	SNAP HOOK	6 FT
FP63213/6	1" POLYESTER WEBBING	SNAP HOOK	REBAR HOOK	6 FT
FP63214/6	1" POLYESTER WEBBING	SNAP HOOK	SCAFFOLD HOOK	6 FT

DOUBLE LEG FIXED Y-LANYARDS

FP635111/4	1" POLYESTER WEBBING	SNAP HOOK	SNAP HOOK (2)	4-5-6 FT
FP635133/4	1" POLYESTER WEBBING	SNAP HOOK	REBAR HOOK (2)	4-5-6 FT
FP635144/4	1" POLYESTER WEBBING	SNAP HOOK	SCAFFOLD HOOK (2)	4-5-6 FT

REMOVABLE EXTENDED BACK D-RING

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
FP63118/2	POLYESTER	SNAP HOOK	3" CIRCULAR RING	2 FT
FP641E7	POLYESTER	LOOP	SMALL D-RING	18 IN



FP61111/4

FP61114/4

FP63101/4

FP63111/4

FP63213/6

FP63118/2

FP635133/4

Please refer to page 33 for hardware details.

Snap Hook - FP6650HS
 Rebar Hook - FP5386HS
 Scaffold Hook - FP5395HS

Dyna-Pak Lanyards



CERTIFIED BY CSA CANADA

This lanyard is specifically designed for fall arrest purposes for workers weighing between 60kg (132lbs) to 160kg (352lbs). With many hardware options and webbing types, it will provide you with the best option to best suit your specific application. It is very important for the user to calculate the fall clearance requirement when using a lanyard with an energy absorber. (SEE calculations on page 43)

LANYARDS FIXED LENGTH WITH "DYNA-PAK" ENERGY ABSORBER

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
SINGLE LEG LANYARD WITH ENERGY ABSORBER				
FP73311/4	POLYESTER	SNAP HOOK	SNAP HOOK	4-5-6 FT
FP73313/4	POLYESTER	SNAP HOOK	REBAR HOOK	4-5-6 FT
FP73314/4	POLYESTER	SNAP HOOK	SCAFFOLD HOOK	4-5-6 FT
FP733AA/4	POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK	4-5-6 FT
FP733AC/4	POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK	4-5-6 FT
SINGLE LEG ADJUSTABLE LANYARD WITH ENERGY ABSORBER				
FP73411/4	POLYESTER	SNAP HOOK	SNAP HOOK	6 FT
FP73413/4	POLYESTER	SNAP HOOK	REBAR HOOK	6 FT
FP73414/4	POLYESTER	SNAP HOOK	SCAFFOLD HOOK	6 FT
DOUBLE LEG Y-LANYARD WITH ENERGY ABSORBER				
FP736111/4	POLYESTER	SNAP HOOK	SNAP HOOK (2)	4-5-6 FT
FP736133/4	POLYESTER	SNAP HOOK	REBAR HOOK (2)	4-5-6 FT
FP736144/4	POLYESTER	SNAP HOOK	SCAFFOLD HOOK (2)	4-5-6 FT
FP736AAA/4	POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK (2)	4-5-6 FT
FP736ACC/4	POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK (2)	4-5-6 FT
DOUBLE LEG ADJUSTABLE Y-LANYARD WITH ENERGY ABSORBER				
FP737111/4	POLYESTER	SNAP HOOK	SNAP HOOK (2)	6 FT
FP737133/4	POLYESTER	SNAP HOOK	REBAR HOOK (2)	6 FT
FP737144/4	POLYESTER	SNAP HOOK	SCAFFOLD HOOK (2)	6 FT
FIXED & CONTINUOUS SINGLE LEG LANYARD WITH ENERGY ABSORBER				
FP74311/4	1.75" POLYESTER WEBBING	SNAP HOOK	SNAP HOOK	4-5-6 FT
FP74313/4	1.75" POLYESTER WEBBING	SNAP HOOK	REBAR HOOK	4-5-6 FT
FP74314/4	1.75" POLYESTER WEBBING	SNAP HOOK	SCAFFOLD HOOK	4-5-6 FT
FIXED & CONTINUOUS Y-LANYARD WITH ENERGY ABSORBER				
FP746111/4	1.75" POLYESTER WEBBING	SNAP HOOK	SNAP HOOK	4-5-6 FT
FP746133/4	1.75" POLYESTER WEBBING	SNAP HOOK	REBAR HOOK	4-5-6 FT
FP746144/4	1.75" POLYESTER WEBBING	SNAP HOOK	SCAFFOLD HOOK	4-5-6 FT



FP73311/4

FP733AC/4

FP73413/6

FP736111/6

FP736144/4

FP736ACC/4

FP74311/4

FP746144/4

Please refer to page 33 for hardware details.

- Snap Hook - FP6650HS
- Rebar Hook - FP5386HS
- Scaffold Hook - FP5395HS
- Alum Snap - FP6650ALL
- Alum Scaffold - FP5395ALL

Dyna-Yard Lanyards



CERTIFIED BY CSA CANADA

The "DYNA-YARD" Lanyard from DYNAMIC has a built in easy to use Fall Indicator/Checker system woven into the webbing, that offers a quick and simple visual check for the recommended and required pre-use inspection. Designed to reduce the impact load experienced during a fall to a maximum of 4 KN (900 lbs) or less. This lanyard meets and exceeds the ANSI and OSHA regulations and is CSA certified by CSA Canada. This lanyard is specifically designed for fall arrest purposes for workers weighing between 65kg (143lbs) to 160kg (352lbs).



FP75814/6

FP75811/6



FP759111/6



FP759133/6

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
DYNA-YARD LANYARD WITH INTEGRATED ENERGY ABSORBER				
FP75811/6	POLYESTER	SNAP HOOK	SNAP HOOK	6 FT
FP75813/6	POLYESTER	SNAP HOOK	REBAR HOOK	6 FT
FP75814/6	POLYESTER	FS6650HS	SCAFFOLD HOOK	6 FT
DYNA-YARD Y-LANYARD WITH INTEGRATED ENERGY ABSORBER				
FP759111/6	POLYESTER	SNAP HOOK	SNAP HOOK (2)	6 FT
FP759133/6	POLYESTER	SNAP HOOK	REBAR HOOK (2)	6 FT
FP759144/6	POLYESTER	SNAP HOOK	SCAFFOLD HOOK (2)	6 FT

Cable Lanyards with E4 & E6 "Dyna-Pak" Energy Absorber



CERTIFIED BY CSA CANADA

Cable lanyards with PVC coatings provides additional durability to withstand harsh conditions making it more versatile in more applications. Flemish eyes termination on the cable provides additional safety to ensure that the product will perform when required. This lanyard is specifically designed for fall arrest purposes for workers weighing between 65kg (143lbs) to 160kg (352lbs).



FP76311/4



FP766144/4

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
SINGLE LANYARD WITH ENERGY ABSORBER				
FP76311/4	1/4" STEEL CABLE W/ PVC COATING	SNAP HOOK	SNAP HOOK	4-5-6 FT
FP76313/4	1/4" STEEL CABLE W/ PVC COATING	SNAP HOOK	REBAR HOOK	4-5-6 FT
FP76314/4	1/4" STEEL CABLE W/ PVC COATING	SNAP HOOK	SCAFFOLD HOOK	4-5-6 FT
FP763AA/4	1/4" STEEL CABLE W/ PVC COATING	ALUM SNAP HOOK	ALUM SNAP HOOK	4-5-6 FT
FP763AC/4	1/4" STEEL CABLE W/ PVC COATING	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK	4-5-6 FT
DOUBLE LEG Y-LANYARD WITH ENERGY ABSORBER				
FP766111/4	1/4" STEEL CABLE W/ PVC COATING	SNAP HOOK	(2)SNAP HOOK	4-5-6 FT
FP766133/4	1/4" STEEL CABLE W/ PVC COATING	SNAP HOOK	(2) REBAR HOOK	4-5-6 FT
FP766144/4	1/4" STEEL CABLE W/ PVC COATING	SNAP HOOK	(2) SCAFFOLD HOOK	4-5-6 FT
FP766AAA/4	1/4" STEEL CABLE W/ PVC COATING	ALUM SNAP HOOK	ALUM (2)SNAP HOOK	4-5-6 FT
FP766ACC/4	1/4" STEEL CABLE W/ PVC COATING	ALUM SNAP HOOK	ALUM (2) SCAFFOLD HOOK	4-5-6 FT

Please refer to page 33 for hardware details.

Snap Hook - FP6650HS
 Rebar Hook - FP5386HS
 Scaffold Hook - FP5395HS

Alum Snap - FP6650ALL
 Alum Scaffold - FP5395ALL

FALL PROTECTION



Kevlar Lanyard



CERTIFIED BY CSA CANADA

Meets and exceed ASTM F887-13 Arc Flash. This lanyard is specifically designed for fall arrest purposes for workers weighing between 65kg (143lbs) to 160kg (352lbs).



FP78313/4

FP786111/4

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
SINGLE LEG LANYARD WITH "DYNA-PAK" ENERGY ABSORBER				
FP78301/4	KEVLAR®	SOFT LOOP	SNAP HOOK	4-5-6 FT
FP78303/4	KEVLAR®	SOFT LOOP	REBAR HOOK	4-5-6 FT
FP78304/4	KEVLAR®	SOFT LOOP	SCAFFOLD HOOK	4-5-6 FT
FP78311/4	KEVLAR®	SNAP HOOK	SNAP HOOK	4-5-6 FT
FP78313/4	KEVLAR®	SNAP HOOK	REBAR HOOK	4-5-6 FT
FP78314/4	KEVLAR®	SNAP HOOK	SCAFFOLD HOOK	4-5-6 FT
DOUBLE LEG Y-LANYARD WITH "DYNA-PAK" ENERGY ABSORBER				
FP786111/4	KEVLAR®	SNAP HOOK	SNAP HOOK (2)	4-5-6 FT
FP786133/4	KEVLAR®	SNAP HOOK	REBAR HOOK (2)	4-5-6 FT
FP786144/4	KEVLAR®	SNAP HOOK	SCAFFOLD HOOK (2)	4-5-6 FT

LEATHER COVER

PART NO.	DESCRIPTION
FPLANCOVER	LEATHER COVER WITH DOME SNAPS TO PROTECT THE ENERGY ABSORBER

Coated Lanyards



CERTIFIED BY CSA CANADA

This lanyard is specifically designed for fall arrest purposes for workers weighing between 70kg (154lbs) to 160kg (352lbs).



FPC74311/4



FPC746144/4

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
SINGLE LEG LANYARD WITH "DYNA-PAK" ENERGY ABSORBER				
FPC74311/4	COATED POLYESTER	SNAP HOOK	SNAP HOOK	4-5-6 FT
FPC74313/4	COATED POLYESTER	SNAP HOOK	REBAR HOOK	4-5-6 FT
FPC74314/4	COATED POLYESTER	SNAP HOOK	SCAFFOLD HOOK	4-5-6 FT
FPC743AA/4	COATED POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK	4-5-6 FT
FPC743AC/4	COATED POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK	4-5-6 FT
DOUBLE LEG Y-LANYARD WITH "DYNA-PAK" ENERGY ABSORBER				
FPC746111/4	COATED POLYESTER	SNAP HOOK	SNAP HOOK (2)	4-5-6 FT
FPC746133/4	COATED POLYESTER	SNAP HOOK	REBAR HOOK (2)	4-5-6 FT
FPC746144/4	COATED POLYESTER	SNAP HOOK	SCAFFOLD HOOK (2)	4-5-6 FT
FPC746AAA/4	COATED POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK (2)	4-5-6 FT
FPC746ACC/4	COATED POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK (2)	4-5-6 FT

Please refer to page 33 for hardware details.

Snap Hook - FP6650HS
 Rebar Hook - FP5386HS
 Scaffold Hook - FP5395HS

Alum Snap - FP6650ALL
 Alum Scaffold - FP5395ALL
 Triple Action Carabineer - FP244

Tower Lanyards with Energy Absorber



CERTIFIED BY CSA CANADA

This lanyard is specifically designed for fall arrest purposes for workers weighing between 60kg (132lbs) to 160kg (352lbs).



FP734AAR/6

FP737ACCR/6

FP734AAQ/6

FP737ACCQ/6

FP733AAL/6

FP736ACCL/6

TOWER LANYARDS WITH O-RING FOR RESCUE

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
SINGLE LEG ADJUSTABLE LENGTH LANYARD WITH ENERGY ABSORBER				
FP734AAR/6	POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK	6 FT
FP734ACR/6	POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK	6 FT
DOUBLE LEG Y-LANYARD ADJUSTABLE LENGTH WITH INTEGRATED ENERGY ABSORBER				
FP737AAR/6	POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK (2)	6 FT
FP737ACCR/6	POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK (2)	6 FT

TOWER LANYARDS WITH TIE BACK ADJUSTABLE LOOP AND O-RING

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
SINGLE LEG ADJUSTABLE LENGTH LANYARD WITH ENERGY ABSORBER				
FP734AAQ/6	POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK	6 FT
FP734ACQ/6	POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK	6 FT
DOUBLE LEG Y-LANYARD ADJUSTABLE LENGTH WITH INTEGRATED ENERGY ABSORBER				
FP737AAAQ/6	POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK (2)	6 FT
FP737ACCQ/6	POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK (2)	6 FT

TOWER LANYARDS WITH 3 FT TIE BACK LOOP FIXED

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
SINGLE LEG ADJUSTABLE LENGTH LANYARD WITH ENERGY ABSORBER				
FP733AAL/6	POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK	6 FT
FP733ACL/6	POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK	6 FT
DOUBLE LEG Y-LANYARD ADJUSTABLE LENGTH WITH INTEGRATED ENERGY ABSORBER				
FP736AAL/6	POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK (2)	6 FT
FP736ACCL/6	POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK (2)	6 FT

Please refer to page 33 for hardware details.

Snap Hook - FP6650HS
 Rebar Hook - FP5386HS
 Scaffold Hook - FP5395HS

Alum Snap - FP6650ALL
 Alum Scaffold - FP5395ALL

Stretch Lanyards with Energy Absorber

LANYARD LEG WILL CONTRACT 18"



CERTIFIED BY CSA CANADA

This lanyard is specifically designed for fall arrest purposes for workers weighing between 60kg (132lbs) to 160kg (352lbs).



FP7S311



FP7S6144



FP743FG/6

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
----------	----------	-------------------	---------------------	--------

SINGLE LEG LANYARD WITH "DYNA-PAK" ENERGY ABSORBER

FP7S311 X	POLYESTER	SNAP HOOK	SNAP HOOK	5, 6 FT
FP7S313 X	POLYESTER	SNAP HOOK	REBAR HOOK	5, 6 FT
FP7S314 X	POLYESTER	SNAP HOOK	SCAFFOLD HOOK	5, 6 FT
FP7S3AA X	POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK	5, 6 FT
FP7S3AC X	POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK	5, 6 FT

DOUBLE LEGS Y-LANYARD WITH "DYNA-PAK" ENERGY ABSORBER

FP7S6111 X	POLYESTER	SNAP HOOK	SNAP HOOK (2)	5, 6 FT
FP7S6133 X	POLYESTER	SNAP HOOK	REBAR HOOK (2)	5, 6 FT
FP7S6144 X	POLYESTER	SNAP HOOK	SCAFFOLD HOOK (2)	5, 6 FT
FP7S6AAA X	POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK (2)	5, 6 FT
FP7S6ACC X	POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK (2)	5, 6 FT

Anti-Corrosion Lanyard



CERTIFIED BY CSA CANADA

This lanyard is specifically designed for fall arrest purposes for workers weighing between 60kg (132lbs) to 160kg (352lbs).

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
----------	----------	-------------------	---------------------	--------

FP743FG	POLYESTER	ALUMINUM CARABINER	LARGE ALUM CARABINER	4, 5, 6 FT
FP743FGG	Y-LANYARD POLYESTER	ALUMINUM CARABINER	LARGE ALUM CARABINER	4, 5, 6 FT

Please refer to page 33 for hardware details.

Snap Hook - FP6650HS
 Rebar Hook - FP5386HS
 Scaffold Hook - FP5395HS

Alum Snap - FP6650ALL
 Alum Scaffold - FP5395ALL

Reflective Lanyards with Energy Absorber



CERTIFIED BY CSA CANADA

1/2" reflective strip on 1 3/4 in (45 mm) web lanyard with "DYNA-PAK" energy absorber. This lanyard is specifically designed for fall arrest purposes for workers weighing between 70kg (154lbs) to 160kg (352lbs),



FP7R311/4



FP7R313/4

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
SINGLE LEGS LANYARD WITH D"YNA-PAK" ENERGY				
FP7R311/4	POLYESTER	SNAP HOOK	SNAP HOOK	4, 5, 6 FT
FP7R313/4	POLYESTER	SNAP HOOK	REBAR HOOK	4, 5, 6 FT
FP7R314/4	POLYESTER	SNAP HOOK	SCAFFOLD HOOK	4, 5, 6 FT

TWIN LEGS LANYARD WITH "DYNA-PAK" ENERGY ABSORBER

FP7R6111/4	POLYESTER	SNAP HOOK	SNAP HOOK (2)	4, 5, 6 FT
FP7R6133/4	POLYESTER	SNAP HOOK	REBAR HOOK (2)	4, 5, 6 FT
FP7R6144/4	POLYESTER	SNAP HOOK	SCAFFOLD HOOK (2)	4, 5, 6 FT

Tie-Back Lanyards



CERTIFIED BY CSA CANADA

Tie-Back lanyards provides the ability to wrap the lanyard leg around a structure and connect back to itself. The auto lock carabiner with 5000lb gate strength ensure there are no accidental disconnections. This lanyard eliminates the need for an additional anchorage connector. This lanyard is specifically designed for fall arrest purposes for workers weighing between 60kg (132lbs) to 160kg (352lbs).



FP7331T/4



FP7371TT/6

PART NO.	MATERIAL	TYPE	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
SINGLE LEG LANYARD WITH ENERGY ABSORBER					
FP7331T/6	POLYESTER	FIXED	SNAP HOOK	TIE-BACK SNAP	6 FT
FP7341T/6	POLYESTER	ADJUSTABLE	SNAP HOOK	TIE-BACK SNAP	6 FT
DOUBLE LEG Y-LANYARD WITH ENERGY ABSORBER					
FP7361TT/6	POLYESTER	FIXED	SNAP HOOK	TIE-BACK SNAP	6 FT
FP7371TT/6	POLYESTER	ADJUSTABLE	SNAP HOOK	TIE-BACK SNAP	6 FT

Please refer to page 33 for hardware details.

Snap Hook - FP6650HS
 Rebar Hook - FP5386HS
 Scaffold Hook - FP5395HS

Alum Snap - FP6650ALL
 Alum Scaffold - FP5395ALL

FALL PROTECTION



Dyna-Pak Energy Absorbers and Extended D-Ring



CERTIFIED BY CSA CANADA

This lanyard is specifically designed for fall arrest purposes for workers weighing between 60kg (132lbs) to 160kg (352lbs).



DYNA-PAK ENERGY ABSORBER WITH CONNECTORS

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
<i>DYNA-PAK ENERGY ABSORBER</i>				
FP70311	POLYESTER	SNAP HOOK	SNAP HOOK	18 IN
FP70391	POLYESTER	SNAP HOOK	LARGE D-RING	18 IN
FP70377	POLYESTER	SMALL D-RING	SMALL D-RING	13.5 IN
FP70399	POLYESTER	LARGE D-RING	LARGE D-RING	16.5 IN
FP703E1	POLYESTER	LOOP	SNAP HOOK	16.5 IN
FP703E9	POLYESTER	LOOP	LARGE D RING	16.5 IN

Work Positioning Products



CERTIFIED BY CSA CANADA

REBAR CHAIN ASSEMBLIES

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
FP635113	POLYESTER	SNAP HOOK (2)	SCAFFOLD HOOK	22 IN
FP675113	STEEL	SNAP HOOK (2)	SCAFFOLD HOOK	28 IN

POLE STRAP

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
FPPOLEST	POLYESTER	SNAP HOOK	SNAP HOOK	3-4 FT

ADJUSTABLE ROPE POLE POSITIONING LANYARD

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
FPADRL	KERNMANTLE	3/4" ALUMINUM CARABINER	ALUMINUM ROPE ADJUSTER	8 FT

Please refer to page 33 for hardware details.

Scaffold Hook - FP5395HS

Snap Hook - FP6650HS
Rebar Hook - FP5386HS

Hooks & Carabiners



CERTIFIED BY CSA CANADA

Hooks and Carabiners offer a multitude of applications and all are available in various forms and sizes. They offer maximum protection and all offer double locking or auto locking closures. They are designed to give you the greatest ease of operation. All are approved for a maximum load of 5000 lbs (22kn) unless other wise specified. CSA, ANSI and CE certified.



FP6650HS



FP4651



FP9652HS



FP5386HS



FP5395HS



FP5395ALL



FP415



FP843



FP714



FP775



FP244



FP261



FP731
(Shown on FP244)

DOUBLE LOCKING SMALL ERGONOMIC SNAP HOOKS

PART NO.	CONSTRUCTION	OPENING	TYPE OF LOCK
FP6650HS	FORGE STEEL	3/4 IN (19 MM)	DOUBLE LOCKING HIGH PERFORMANCE
FP6650ALL	ALUMINUM	3/4 IN (19 MM)	DOUBLE LOCKING HIGH PERFORMANCE
FP4651	FORGE STEEL/SWIVEL	3/4 IN (19 MM)	DOUBLE LOCKING
FP9652HS	STAMPED STEEL	3/4 IN (19 MM)	DOUBLE LOCKING HIGH PERFORMANCE
FP3618	FORGE STEEL	3/4 IN (19 MM)	DOUBLE LOCKING 5000 LBS GATE SNAP

DOUBLE LOCKING LARGE ERGONOMIC REBAR AND SCAFFOLD HOOKS

PART NO.	CONSTRUCTION	OPENING	TYPE OF LOCK
FP5386HS	FORGE STEEL	2 IN (50 MM)	DOUBLE LOCKING HIGH PERFORMANCE
FP5395HS	FORGE STEEL	2.5 IN (64 MM)	DOUBLE LOCKING HIGH PERFORMANCE
FP5395ALL	ALUMINUM	2.5 IN (64 MM)	DOUBLE LOCKING HIGH PERFORMANCE

TWIST LOCK CARABINER CONNECTOR

PART NO.	CONSTRUCTION	OPENING	TYPE OF LOCK
FP244	ALLOY STEEL & HEAT TREATED "D" SHAPE	3/4 IN (19 MM)	AUTO-TWIST LOCK TRIPLE ACTION
FP714	ALLOY STEEL & HEAT TREATED PEAR SHAPE	2-1/4 IN (57 MM)	AUTO-TWIST LOCK TRIPLE ACTION
FP415	ALLOY STEEL & HEAT TREATED "D" SHAPE	5/8 IN (16 MM)	AUTO-TWIST LOCK
FP775	ALLOY STEEL & HEAT TREATED "D" SHAPE	1 IN (25 MM)	AUTO-TWIST LOCK
FP843	ALLOY STEEL & HEAT TREATED "D" SHAPE	3/4 IN (19 MM)	AUTO-TWIST LOCK
FP261	ALLOY STEEL & HEAT TREATED "D" SHAPE W/ CAPTIVE EYE	3/4 IN (19 MM)	AUTO-TWIST LOCK
FP714ALL	ALUMINIUM, PEAR SHAPE	2-1/4 IN (57 MM)	AUTO-TWIST LOCK
FP415ALL	ALUMINIUM "D" SHAPE	5/8 IN (16 MM)	AUTO-TWIST LOCK
FP775ALL	ALUMINIUM "D" SHAPE	1 IN (25 MM)	AUTO-TWIST LOCK
FP261ALL	ALUMINIUM "D" SHAPE	3/4 IN (19 MM)	AUTO-TWIST LOCK

PLASTIC SEPARATOR

PART NO.	DESCRIPTION
FP731	PLASTIC SEPARATOR FOR DUAL SELF-RETRACTING DEVICES

Vertical Rope Lifelines



CERTIFIED BY CSA CANADA



FP16KRN25



FP58EPS25



FP16EPS25



FP16EPS25A



FP16EPS25B



FP16EPS25C

PART NO.	MATERIAL	CONNECTORS	LENGTH
FP16KRN25	KERMANTLE ROPE 16 MM (5/8 PO)	1 TERMINATION & 1 CARABINER #FP415	25 FT (7.6 M)
FP16KRN50	KERMANTLE ROPE 16 MM (5/8 PO)	1 TERMINATION & 1 CARABINER #FP415	50 FT (15.2 M)
FP16KRN100	KERMANTLE ROPE DE 16 MM (5/8 PO)	1 TERMINATION & 1 CARABINER #FP415	100 FT (30.5 M)
FP58EPS25	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 CARABINER #FP415	25 FT (7.6 M)
FP58EPS50	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 CARABINER #FP415	50 FT (15.2 M)
FP16EPS25	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 CARABINER #FP415	25 FT (7.6 M)
FP16EPS50	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 CARABINER #FP415	50 FT (15.2 M)
FP16EPS75	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 CARABINER #FP415	75 FT (22.8 M)
FP16EPS100	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 CARABINER #FP415	100 FT (30.5 M)
FP16EPS25A	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 SNAP HOOK #6650HS	25 FT (7.6 M)
FP16EPS50A	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 SNAP HOOK #6650HS	50 FT (15.2 M)
FP16EPS75A	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 SNAP HOOK #6650HS	75 FT (22.8 M)
FP16EPS100A	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 SNAP HOOK #FP6650HS	100 FT (30.5 M)
FP16EPS25B	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 REBAR HOOK #FP5386HS	25 FT (7.6 M)
FP16EPS50B	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 REBAR HOOK #FP5386HS	50 FT (15.2 M)
FP16EPS75B	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 REBAR HOOK #FP5386HS	75 FT (22.8 M)
FP16EPS100B	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 REBAR HOOK #FP5386HS	100 FT (30.5 M)
FP16EPS25C	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 SCAFFOLD HOOK #FP5395HS	25 FT (7.6 M)
FP16EPS50C	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 SCAFFOLD HOOK #FP5395HS	50 FT (15.2 M)
FP16EPS75C	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 SCAFFOLD HOOK #FP5395HS	75 FT (22.8 M)
FP16EPS100C	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 SCAFFOLD HOOK #FP5395HS	100 FT (30.5 M)

NOTE: Other configurations of vertical lifelines also available. See our price list for more details.
All our vertical lifelines are shrink wrapped at both spliced termination ends.

Rope Grabs



CERTIFIED BY CSA CANADA

Our lifelines and rope grab kits are a practical solution for many fall arrest applications. Our Rope Grab is equipped with a Panic Lock feature as well as an orientation lock out feature that will not allow the rope grab to be installed upside down. All of our Vertical rope lifelines and rope grabs combinations meet and exceed ANSI, OSHA and CSA certified. This lanyard is specifically designed for fall arrest purposes for workers weighing between 60 kg (132 lbs) to 160 kg (352 lbs).



FP151/30

PART NO.	DESCRIPTION
FP131/30	AUTOMATIC ROPE GRAB WITH PANIC LOCK (LARGE EYE) WITH 30 IN (0.8M) DYNA-PAK E4 ENERGY ABSORBING LANYARD & (1) DOUBLE LOCKING ERGONOMIC SNAP HOOK FP6650HS
FP151/30	AUTOMATIC ROPE GRAB WITH PANIC LOCK (LARGE EYE) WITH 30 IN (0.8M) LANYARD & (1) DOUBLE LOCKING ERGONOMIC SNAP HOOK FP6650HS



FP131/30

Anchorage Connectors

At DYNAMIC we offer a complete line of anchorage connectors that meet all needs. DSI's anchorage connectors are produced and are designed to be used for a variety of Fall Arrest applications. Each has minimum tensile strength of 5000 lbs (22kn).



PART NO.	DESCRIPTION	LENGTH
FP10	CABLE SLING 1/4"(6MM) GALVANIZED STEEL CLEAR PVC COATED AGAINST CORROSION SWAGED EYES AT EACH END	3 FT (0.9M), 4 FT (1.2 M) 5 FT (1.5M), 6 FT (1.8 M)
FP10F	CABLE SLING 1/4" (6MM) GALVANIZED STEEL RED PVC COATED AGAINST CORROSION FLEMISH EYE SPLICE AT EACH END	3 FT (0.9M), 4 FT (1.2 M) 5 FT (1.5M), 6 FT (1.8 M)
FP10/3FC	CABLE SLING CHOKER 1/4 IN (6MM) GALVANIZED CABLE WITH PVC COATED FLEMISH EYE AT BOTH ENDS. ONE (1) O-RING OF 2 IN (50 MM) AT ONE END AND ONE (1) O-RING OF 3 IN AT THE OTHER END. THE 2 IN TO BE SLIDE IN THE 3 IN TO CREATE THE CHOKER.	3 FT (0.9M), 4 FT (1.2 M) 5 FT (1.5M), 6 FT (1.8 M)
FP10/3FD	CABLE SLING CHOKER 1/4 IN (6 MM) GALVANIZED CABLE WITH PVC COATED FLEMISH EYE AT BOTH ENDS. ONE (1) O-RING OF 3 IN (50 MM) AT ONE END AND ONE (1) SNAP HOOK MODEL FP6650HS AT THE OTHER END. THE SNAP HOOK TO BE SLIDE IN THE 3 IN TO CREATE THE CHOKER.	3 FT (0.9M), 4 FT (1.2 M) 5 FT (1.5M), 6 FT (1.8 M)
FP10/3FE	CABLE SLING CHOKER 1/4 IN (6 MM) GALVANIZED CABLE WITH PVC COATED FLEMISH EYE AT BOTH ENDS. ONE (1) SNAP HOOK MODEL FP6650HS AT THE END	3 FT (0.9M), 4 FT (1.2 M) 5 FT (1.5M), 6 FT (1.8 M)
FP11	PASS THROUGH ANCHOR SLING 2"(50MM), POLYESTER WEBBING (1) SMALL D-RING AND (1) LARGE D-RING	3 FT (0.9 M) 4 FT (1.2 M), 6 FT (1.8 M)
FP12	CROSS ARM ANCHOR SLING 2"(50MM), POLYESTER WEBBING WITH SEWN LOOP AND (1) LARGE D-RING THAT PASS THROUGH THE LOOP TO TIGHTEN AROUND AND ANCHOR POINT	3"(0.9 M) 4 FT (1.2 M), 6 FT (1.8 M)
FP13	RESIDENTIAL ANCHOR SLING. HEAVY DUTY POLYESTER WEBBING	3 FT (0.9 M)
FP15/1.4	SCAFFOLD ANCHOR SLING 2" (50MM)NYLON WEBBING WITH SEWN LOOP AND (1) LARGE D-RING	17 IN (0.4 M)
FP16/3.5	DISPOSABLE ANCHOR SLING WITH PROTECTIVE SLEEVE	3.5 FT (1 M)
FP17/4	DISPOSABLE ANCHOR SLING WITHOUT PROTECTIVE SLEEVE	4 FT (1,2 CM)



FP3730



FP3731



FP3733-75



FP3734-10Y



FP3735-DTA5



FP3734-10S

VARIOUS ANCHORAGE CONNECTORS

PART NO.	DESCRIPTION
FP3730	D-RING ANCHORAGE CONNECTOR 3/4" HOLE
FP3731-75	TEMPORARY REMOVABLE CONCRETE ANCHOR. 3/4" DIAMETER RATED FOR 22KN (5000LBS)
FP3731-1	TEMPORARY REMOVABLE CONCRETE ANCHOR. 1" DIAMETER RATED FOR 44KN (10,000LBS)
FP3731-M15	TEMPORARY AND REMOVABLE MINNING BOLT ANCHOR FOR 39MM (1.5") HOLES RATED FOR 44KN (10,000LBS)
FP3733-75	TEMPORARY REMOVABLE TOGGLE ANCHOR THAT CAN BE USED ON STEEL OR CONCRETE. 3/4" DIAMETER RATED FOR 22KN (5000LBS)
FP3734-10Y	SEMI-PERMANENT SWIVEL HYBRID D-RING THAT IS REMOVABLE AND RESUSABLE. 1" DIAMETER RATED FOR 44KN (10,000LBS)
FP3735-DTA5	DROP IN ANCHOR WITH D-RING WITH 4IN ROUND PLATE RATED FOR 22KN (5000LBS)

10K ZINC PLATED SWIVEL D-RING

PART NO.	DESCRIPTION
FP3734-10N	10K ZINC PLATED SWIVEL D-RING WITH NO HARDWARE, 5/8" DIAMETER RATED FOR 44KN (10,000LBS)
FP3734-10C	10K ZINC PLATED SWIVEL D-RING WITH CONCRETE HARDWARE. 5/8" DIAMETER RATED FOR 44KN (10,000LBS)
FP3734-10S	10K ZINC PLATED SWIVEL D-RING WITH STEEL HARDWARE. 5/8" DIAMETER RATED FOR 44KN (10,000LBS)
FP3734-10SB	STEEL HARDWARE ONLY FOR 10K ZINC PLATED SWIVEL D-RING
FP3734-10CB	CONCRETE HARDWARE ONLY FOR 10K ZINC PLATED SWIVEL D-RING
FP3734-10W	WELD ON HARDWARE FOR 10K ZINCE PLATED SWIVEL D-RING
FP3734-10BP	BACK PLATE FOR 10K ZINCE PLATED SWIVEL D-RING

Anchorage Connectors



FP3734-5SS



FP3734-5S



FP3732-414



FP3732V-414



FP3800

5K 316 STAINLESS STEEL SWIVEL D-RING

PART NO.	DESCRIPTION
----------	-------------

FP3734-5SN	5K 316 STAINLESS STEEL SWIVEL D-RING WITH NO HARDWARE. 5/8" RATED FOR 22KN (5000LBS)
------------	--

FP3734-5SS	5K 316 STAINLESS STEEL SWIVEL D-RING WITH STEEL HARDWARE. 5/8" RATED FOR 22KN (5000LBS)
------------	---

FP3734-5SC	5K 316 STAINLESS STEEL SWIVEL D-RING WITH CONCRETE HARDWARE. 5/8" RATED FOR 22KN (5000LBS)
------------	--

FP3734-5SSB	STEEL HARDWARE ONLY FOR 5K 316SS SWIVEL D-RING
-------------	--

FP3734-5SCB	CONCRETE HARDWARE ONLY FOR 5K 316SS SWIVEL D-RING
-------------	---

FP3734-5ST	CONCRETE TOOL FOR 5K 316SS SWIVEL D-RING
------------	--

FP3734-5SW	WELD ON HARDWARE ONLY FOR 5K 316SS SWIVEL D-RING
------------	--

5K ZINC PLATED SWIVEL D-RING

PART NO.	DESCRIPTION
----------	-------------

FP3734-5N	5K ZINC PLATED SWIVEL D-RING WITH NO HARDWARE, 5/8" DIAMETER RATED FOR 22KN (5,000LBS)
-----------	--

FP3734-5C	5K ZINC PLATED SWIVEL D-RING WITH COCRETE HARDWARE, 5/8" DIAMETER RATED FOR 22KN (5,000LBS)
-----------	---

FP3734-5S	5K ZINC PLATED SWIVEL D-RING WITH STEEL HARDWARE, 5/8" DIAMETER RATED FOR 22KN (5,000LBS)
-----------	---

FP3734-5SB	STEEL HARDWARE ONLY FOR 5K ZINC PLATED SWIVEL D-RING
------------	--

FP3734-5CB	CONCRETE HARDWARE ONLY FOR 5K ZINC PLATED SWIVEL D-RING
------------	---

Beam Anchors

PART NO.	DESCRIPTION
----------	-------------

FP3732-414	BEAM CLAMP EASY SLIDER FOR I-BEAM WITH 4-14 IN (100-356 MM) WIDTH
------------	---

FP3732V-414	VERTICAL BEAM CLAMP EASY SLIDER FOR I-BEAM WITH 4-14 IN (100-356 MM) WIDTH
-------------	--

FP3732-1230	BEAM CLAMP EASY SLIDER FOR I-BEAM WITH 12-30 IN (305-762 MM) WIDTH
-------------	--

FP3800	BEAM TROLLEY WITH WHEELS FOR I-BEAMS WITH 3-10 IN (76-254 MM) WIDTH
--------	---



FP960

Door / Window Anchor

PART NO.	DESCRIPTION
FP960	DOOR/WINDOW ANCHOR - PROVIDE A NON-INTRUSIVE ANCHOR POINT AND CAN BE EASILY INSTALLED INSIDE THE INTERIOR OF A BUILDING OR WINDOW OPENING ENABLING THE MOST DIFFICULT JOB TO GET DONE SAFELY. ADJUSTABLE FROM 23.62 IN TO 49.12 IN (59.05CM TO 123.02 CM). STORAGE BAG INCLUDED



FP09D



FP09R

Roof Brackets

PART NO.	DESCRIPTION
FP09D	DISPOSABLE ROOF ANCHOR(WITH NAILS)
FP09R	REUSABLE ROOF ANCHOR (WITH SCREWS)
FP09RF	REUSABLE FLAT ROOF ANCHOR (WITH SCREWS)



FP3001

4 Persons Temporary Rope Horizontal Lifeline

PART NO.	DESCRIPTION
FP3001	ADJUSTABLE HORIZONTAL LIFELINE THAT SPANS 5M (16FT) TO 25M (82FT), SUITABLE FOR 4 PERSONS. INCLUDES 16MM (5/8") DIAMETER KERNMANTLE ROPE, CORROSION RESISTANT TENSIONER, 4 STEEL O RINGS FOR THE USER TO EASILY ATTACH HIS LANYARD TO AND CARABINER END CONNECTIONS



FPWRISTLETS



FP4017B

Rescue and Retrieval Systems

PART NO.	DESCRIPTION
FP4017B	SPREADER BAR
FPWRISTLETS	WRISTLETS
FPTRAUST	TRAUMA STRAPS
FPWORKSEAT	WORK SEAT FOR LONG TIME WORK ON HEIGHT
FPRESCLAD	LADDER RESCUES SYSTEM WHICH INCLUDES 18 FT LADDER, ROPE AND A BELAY SYSTEM



FPRESCLAD



FPWORKSEAT



FPTRAUST

Tripods and Accessories

The DYNAMIC Tripods and tripods kits are versatile and lightweight. Made of High-strength aluminum construction with adjustable legs and independent leg locking feature which secure legs in place and spiked feet for slippery surfaces. Devices mounted on the outside to maximize work area under the tripod for work and rescue. Available in 7ft (2m) and 9ft (3m). Withstands up to 5,000 lbs. (22kN). Max worker weight capacity of 360lbs. Meets and exceed all applicable ANSI and CSA standards.



FP09907/1



FP860

TRIPODS AND TRIPOD KITS

PART NO.	DESCRIPTION
FP09907	7 FT TRIPOD WITH TELESCOPING LEGS THAT CAN ADJUST FROM 4 FT TO 7 FT. ALUMINUM CONSTRUCTION AND STEEL FEET WITH SPIKES FOR SLIPPERY SURFACES
FP09910	9FT TRIPOD WITH TELESCOPING LEGS THAT CAN ADJUST FROM 7.5 FT TO 9 FT. ALUMINUM CONSTRUCTION AND STEEL FEET WITH SPIKES FOR SLIPPERY SURFACES
FP09907K3W	TRIPOD KIT WHICH INCLUDES FP09907 7FT TRIPOD, FP09907/1 DEVICE BRACKET, FP3NN50CR 3-WAY SELF-RETRACTING LIFELINE, AND FP1007 BAG
FP09907AK3W	TRIPOD KIT WHICH INCLUDES FP09907 7FT TRIPOD, FP09907/3 DEVICE BRACKET, FP3AA15CR 3-WAY SELF-RETRACTING LIFELINE, AND FP1007 BAG
FP09907AAK3W	TRIPOD KIT WHICH INCLUDES FP09907 7FT TRIPOD, FP09907/4 DEVICE BRACKET, FP3AA33CR 3-WAY SELF-RETRACTING LIFELINE, AND FP1007 BAG

TRIPOD DEVICES BRACKETS

PART NO.	DESCRIPTION
FP09907/1	TRIPOD DEVICE BRACKET DESIGNED FOR FP3NN50CR SELF-RETRACTING LIFELINE 3-WAY DEVICE
FP09907/2	TRIPOD DEVICE BRACKET DESIGNED FOR FP3AA33CR SELF-RETRACTING LIFELINE 3-WAY DEVICE
FP09907/3	TRIPOD DEVICE BRACKET DESIGNED FOR FP3AA15CR SELF-RETRACTING LIFELINE 3-WAY DEVICE
FP09907/4	TRIPOD DEVICE BRACKET DESIGNED FOR FP3AA33CR SELF-RETRACTING LIFELINE 3-WAY DEVICE

ACCESSORIES FOR TRIPOD

PART NO.	DESCRIPTION
FP099HDPINS	PIN FOR TRIPOD HEAD
FP099RING	TRIPOD O-RING
FP099PULLEY	TRIPOD PULLEY ASSEMBLY
FPTRIPDST7	STRAP FOR 7 FT TRIPOD
FPTRIPDST9	STRAP FOR 9 FT TRIPOD
FP099FEET	TRIPOD FEET
FP099PLPIN	PIN FOR TRIPOD HEAD PULLEY
FP099LGPIN	PIN FOR TRIPOD LEG
FP099BRPIN	PIN FOR DEVICE BRACKETS
FP099BRBOLT	BOLT FOR DEVICE BRACKETS

WINCH

Winch to be used for raising or lowering of personel or material in confined spaces. Equipped with a mounting plate that connects to the tripod. Galvanized Steel wire rope of 3/16 in dia. Maximum lifting load capacity of 300 lbs. Comes with a Snap Hook Model FP6650 as a connector.

PART NO.	DESCRIPTION
FP860	WINCH WITH GALVANISED STEEL CABLE AND SNAP HOOK, 60 FT (18 M)
FP860B	WINCH BRACKET FOR FP860

Compliance Kits

BASIC "B-COMPLIANT" KITS IN BAG

PART NO.	DESCRIPTION	SIZE OF HARNESS	LENGTH OF ROPE
FPCKIT01/6	BASIC KIT INCL: (1) FP4001D HARNESS WITH PERMANENTLY ATTACHED FP74311/6 LANYARD, (1) FP1002 EQUIPMENT BAG	L OR XL*	6 FT (1.83 M)
FPKIT02/4	BASIC KIT INCL: (1) FP4001D HARNESS WITH FP74311/4 LANYARD, (1) FP1002 EQUIPMENT BAG	L OR XL*	4 FT (1.22 M)
FPKIT02/6	BASIC KIT INCL: (1) FP4001D HARNESS WITH FP74311/6 LANYARD, (1) FP1002 EQUIPMENT BAG	L OR XL*	6 FT (1.83 M)
FPKIT08/6	HIGH END KIT INCL: (1) FP1001EDG HARNESS WITH (1) FP74311/6 LANYARD, (1) FP1004 EQUIPMENT BAG	L OR XL*	6 FT (1.83 M)

* Please specify harness size when ordering.

Roofer's Kits

"B-COMPLIANT" DELUXE ROOFER'S KITS IN STORAGE BUCKET

PART NO.	DESCRIPTION	SIZE OF HARNESS	LENGTH OF ROPE
FPRK099DL/25	ROOFER'S KIT INCL: (1) FP16KRN25 LIFELINE, (1) FP2501DXL HARNESS, (1) ROPE GRAB #FP131/30 WITH 30 IN LANYARD AND DYNA-PAK ENERGY ABSORBER, (1) REUSABLE ROOF ANCHOR #FP09R WITH SCREWS (1) STORAGE BUCKET	XL	25 FT (7.6 M)
FPRK099DL/50	ROOFER'S KIT INCL: (1) FP16KRN50 LIFELINE, (1) FP2501DXL HARNESS, (1) ROPE GRAB #FP131/30 WITH 30 IN LANYARD AND DYNA-PAK ENERGY ABSORBER, (1) REUSABLE ROOF ANCHOR #FP09R WITH SCREWS (1) STORAGE BUCKET	XL	50 FT (15 M)

"B-COMPLIANT" ECONO ROOFER'S KITS IN STORAGE BUCKET

PART NO.	DESCRIPTION	SIZE OF HARNESS	LENGTH OF ROPE
FPRK098/25	ROOFER'S KIT INCL: (1) FP16EPS25 ECONO LIFELINE, (1) FP4001DU HARNESS, (1) ROPE GRAB #FP151/30 WITH 30 IN WEB, (1) DISPOSABLE ROOF ANCHOR #FP09D WITH NAILS & (1) STORAGE BUCKET	UNIVERSAL	25 FT (7.6 M)
FPRK098R/25	ROOFER'S KIT INCL: (1) FP16EPS25 ECONO LIFELINE, (1) FP4001DU HARNESS, (1) ROPE GRAB #FP151/30 WITH 30 IN WEB, (1) REUSABLE ROOF ANCHOR #FP09R WITH SCREWS & (1) STORAGE BUCKET	UNIVERSAL	25 FT (7.6 M)
FPRK098/50	ROOFER'S KIT INCL: (1) FP16EPS50 ECONO LIFELINE, (1) FP4001DU HARNESS, (1) ROPE GRAB #FP151/30 WITH 30 IN WEB, (1) DISPOSABLE ROOF ANCHOR #FP09D WITH NAILS & (1) STORAGE BUCKET	UNIVERSAL	50 FT (15 M)
FPRK098R/50	ROOFER'S KIT INCL: (1) FP16EPS50 ECONO LIFELINE, (1) FP4001DU HARNESS, (1) ROPE GRAB #FP151/30 WITH 30 IN WEB, (1) REUSABLE ROOF ANCHOR #FP09R WITH SCREWS & (1) STORAGE BUCKET	UNIVERSAL	50 FT (15 M)
FPRK099B/25	ROOFER'S KIT INCL: (1) FP16EPS25 ECONO LIFELINE, (1) FP4001DU HARNESS, (1) ROPE GRAB #FP131/3 WITH 2.5 FT "DYNA-PAK" ENERGY ABSORBING LANYARD, (1) DISPOSABLE ROOF ANCHOR #FP09D WITH NAILS, (1) STORAGE BUCKET	UNIVERSAL	25 FT (7.6 M)
FPRK099B/50	ROOFER'S KIT INCL: (1) FP16EPS50 ECONO LIFELINE, (1) FP4001DU HARNESS, (1) ROPE GRAB #FP131/3 WITH 2.5 FT "DYNA-PAK" ENERGY ABSORBING LANYARD, (1) DISPOSABLE ROOF ANCHOR #FP09D WITH NAILS, (1) STORAGE BUCKET	UNIVERSAL	50 FT (15 M)
FPRK099D/25	ROOFER'S KIT INCL: (1) FP16EPS25 ECONO LIFELINE, (1) FP4001DU HARNESS, (1) ROPE GRAB #FP131/30 WITH 30 IN "DYNA-PAK" ENERGY ABSORBING LANYARD, (1) REUSABLE ROOF ANCHOR #FP09R WITH SCREWS, (1) STORAGE BUCKET	UNIVERSAL	25 FT (7.6 M)
FPRK099D/50	ROOFER'S KIT INCL: (1) FP16EPS50 ECONO LIFELINE, (1) FP4001DU HARNESS, (1) ROPE GRAB #FP131/30 WITH 30 IN "DYNA-PAK" ENERGY ABSORBING LANYARD, (1) REUSABLE ROOF ANCHOR #FP09R WITH SCREWS, (1) STORAGE BUCKET	UNIVERSAL	50 FT (15 M)



FPCKIT01/6



FPKIT02/6



FPKIT08/6



FPRK099DL/25



FPRK098/25



FPRK099B/25



FPRK099D/25

Plastic Inspection Tag for Safety Equipment

Durable tag with security locking device, galvanize steel shackle, plastic body with writable area for personal information, unique serial number to keep tracking on the product, offer in choice of 5 colors.



PART NO.	COLOR	QTY PER PACK
FPTAGR	RED	25
FPTAGB	BLUE	25
FPTAGY	YELLOW	25
FPTAGG	GREEN	25
FPTAGO	ORANGE	25

Accessories

PART NO.	DESCRIPTION	WEIGHT CAPACITY
FPTOOLTETHER	TOOL TETHER WITH CARABINER	10KG (22LBS)

Storage bags

STORAGE BAGS FOR VARIOUS EQUIPMENT

PART NO.	DESCRIPTION
FP1002	SMALL MESH EQUIPMENT BAG FOR A HARNESS AND LANYARD COMBO KIT - 14L X 13.5H IN
FP1004	SMALL EQUIPMENT BAG FOR BASIC EQUIPMENT KIT - 11.25L X 11.375H IN
FP1005	SMALL EQUIPMENT BAG FOR SELF RETRACTING LIFELINE OR WINCH 16L X 16.5W X 9H IN
FP1006	LARGE EQUIPMENT BAG FOR HARNESS, LANYARD, ANCHORAGE CONNECTORS AND MORE 23.5L X 11.75W X 12.5H IN


STORAGE BAGS FOR TRIPODS

PART NO.	DESCRIPTION
FP1007	DURABLE ZIPPERED TRIPOD BAG. TO PROTECT YOUR TRIPOD FROM DAMAGE AND DIRT WHILE REDUCING CARRYING EFFORT FOR FP09907 TRIPOD - 58.5 X 10.625 X 12.5 IN
FP1008	DURABLE ZIPPERED TRIPOD BAG. TO PROTECT YOUR TRIPOD FROM DAMAGE AND DIRT WHILE REDUCING CARRYING EFFORT FOR FP09910 TRIPOD - 96.5 X 12 X 12.75 IN




FALL CLEARANCE CALCULATION

① Worker's D-ring is above anchorage

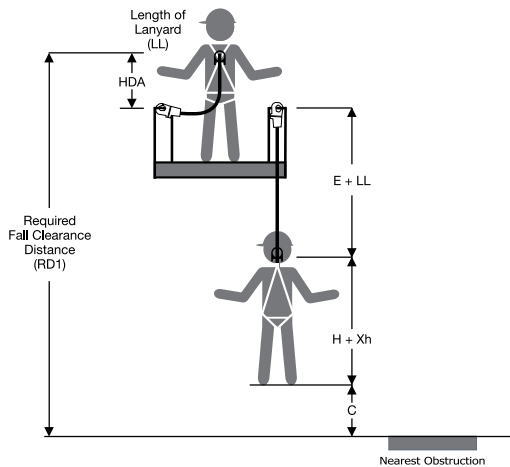

② Worker's D-ring is below anchorage

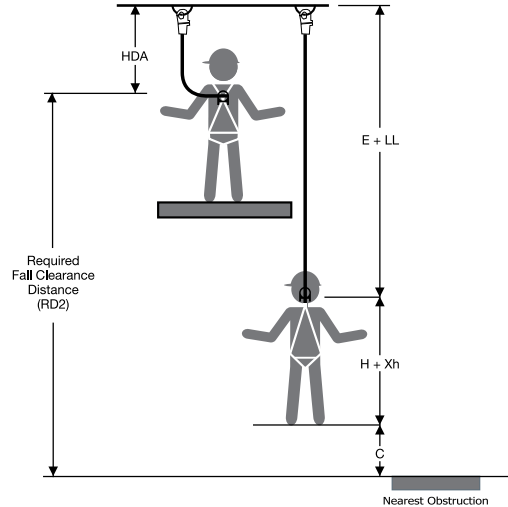

① $RD1 = LL + E + HDA + H + Xh + C + P$

② $RD2 = LL + E - HDA + H + Xh + C + P$

- LL = Lanyard Length
- HDA = Vertical distance from D-ring to the anchorage system at the end of the lanyard.
- RD = Required Distance for your fall arrest system.
- E = Elongation or deceleration distance - This is the elongation of the deceleration device when it's deployed.
- H = D-ring Height - This is the distance from the worker's feet to the harness dorsal D-ring.
- C = Extra Clearance or safety factor.
- Xh = System material stretch and D-ring movement
- P = Position of the body ie. standing, crouching or laying down.

Commonly used values:

E – Energy Absorber = 3.9 ft
WSRL = 3.5 ft

P – Standing = 0 ft
Crouching = 3ft
laying down = 5f

H – D-Ring height estimated to be 5 ft.

Xh – Material system stretch and D-ring movement estimated to be 1 ft.

C – Safety factor recommendation of 2 ft minimum.

Your formula can now be approximated as:

$$① RD1 = LL + E + HDA + P + 8$$

$$② RD2 = LL + E - HDA + P + 8$$

Example:

If you connect a 6ft E4 energy absorbing lanyard to an anchorage 2 ft above your back D-Ring while standing, you need a clearance of: $RD2 = 6 + 3.9 - 2 + 0 + 8 = 15.9$ ft.

If you connect a 6ft E4 energy absorbing lanyard to an anchorage 2 ft below your back D-Ring while standing, you need a clearance of: $RD1 = 6 + 3.9 + 2 + 0 + 8 = 19.9$ ft.

www.dsisafety.com




A CANADIAN COMPANY

SEE OUR OTHER SAFETY PRODUCTS



Head Protection



Eye and Face Protection



Hearing Protection



Respiratory Protection



Fall Protection



First Aid Products



Traffic and High Visibility Products



Welding Face Shield



Product Identification



CANADA AND USA

DSI Safety Inc. / Sécurité DSI Inc.
2477 Michelin Street, Laval, QC H7L 5B9
T. (450) 687-7374 • F. (450) 687-2243
www.dsisafety.com

EUROPE

Dynamic Safety Europe B.V.
Anodeweg 52 4338RA Middelburg, The Netherlands
T+31 (0) 118 745760 • F+31 (0) 118 745769
www.dynamicsafety.eu

