



EXOCARB® WXL®

Premium Performance Carbide End Mills with OSG's Proprietary WXL® Coating

List 3712 (Continued)

WXL-PC-EBD, 2 Flute, Stub Length, Pencil Neck, Ball End


SPEED FEED PT1162-1169	CARBIDE	WXL		STUB	30°	SHANK h6
Radius Tolerance						
0.2 ≤ D ≤ 6			+/-0.005mm			



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Minimum Neck Diameter	Effective Neck Length	Neck Taper	Shank Diameter	Type
	D	L	Lc	d1	L1	θn	d	
3170421	5.0	130	5.00	4.95	50.1	2.0°	8	2
3170431	6.0	100	6.00	5.95	30.0	1.0°	8	1
3170432	6.0	100	6.00	5.95	40.0	1.0°	8	1
3170433	6.0	100	6.00	5.95	50.0	1.0°	8	1
3170434	6.0	110	6.00	5.95	60.0	1.0°	10	1
3170435	6.0	120	6.00	5.95	70.0	1.0°	10	1
3170436	6.0	130	6.00	5.95	80.0	1.0°	12	1
3170441	6.0	100	6.00	5.95	49.0	1.5°	8	2
3170451	6.0	100	6.00	5.95	36.0	2.0°	8	2

Packed: 1 pc.
Available WXL® coating only.

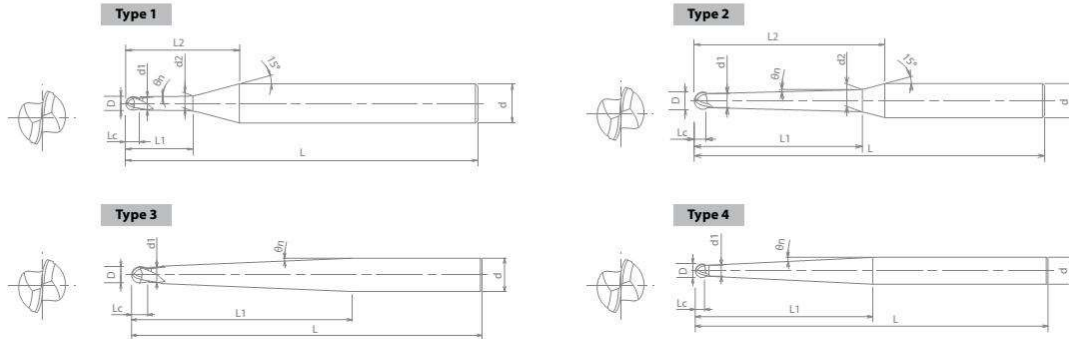

List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1018	Med. 1035 1045	High 1065	4140 4340		300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
3712	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best

