

EXOCARB® WXS®


Ultra Premium Performance Carbide End Mills with OSG's Proprietary WXS® Coating

List 4571

WXS-PKE, 4 Flute, Stub Length, Reduced Neck, Corner Radius

SPEED FEED P1184	CARBIDE	WXS	STUB	45°	SHANK h6
------------------------	---------	-----	------	-----	-------------

Milling Diameter Tolerance	
3≤D≤12	+0 / -0.02mm

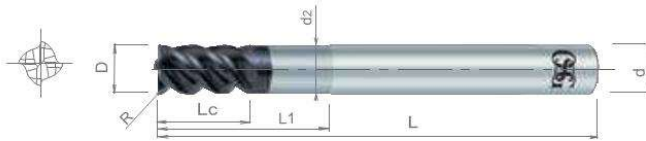

Units: mm

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	R	L	Lc	L1	d2	d
457103011	3	0.2	60	5	9	2.85	6
457103111	3	0.2	70	5	15	2.85	6
457103211	3	0.5	60	5	9	2.85	6
457103311	3	0.5	70	5	15	2.85	6
457104011	4	0.2	70	6	12	3.80	6
457104111	4	0.2	80	6	20	3.80	6
457104211	4	0.5	70	6	12	3.80	6
457104311	4	0.5	80	6	20	3.80	6
457105011	5	0.2	80	8	15	4.80	6
457105111	5	0.2	90	8	25	4.80	6
457105211	5	0.5	80	8	15	4.80	6
457105311	5	0.5	90	8	25	4.80	6
457106011	6	0.5	90	9	18	5.80	6
457106111	6	1.0	90	9	18	5.80	6
457106211	6	1.0	100	9	30	5.80	6
457106311	6	0.5	100	9	30	5.80	6
457108011	8	0.5	100	12	24	7.70	8
457108111	8	0.5	110	12	40	7.70	8
457108211	8	1.0	100	12	24	7.70	8
457108311	8	1.0	110	12	40	7.70	8
457110011	10	0.5	100	15	30	9.70	10
457110111	10	0.5	120	15	50	9.70	10
457110211	10	1.0	100	15	30	9.70	10
457110311	10	1.0	120	15	50	9.70	10
457110411	10	2.0	100	15	30	9.70	10
457110511	10	2.0	120	15	50	9.70	10
457112011	12	1.0	110	18	36	11.70	12
457112111	12	1.0	130	18	60	11.70	12
457112211	12	2.0	110	18	36	11.70	12
457112311	12	2.0	130	18	60	11.70	12

Packed: 1 pc.
Available WXS® coating only.



OSG's Performance & Savings

Not machining steel over 54 HRC? Try EXOCARB® WXL® - List 3771 (p. 880)

Don't require ultra-high performance? Try HY-PRO® CARB - List HP434 or HP435
(p. 987-988 or 990)

Want to turbo-charge performance? Try EXOPRO® PHX - List 9575 (p. 847)