



# SPECIFICATION SHEET

## 39-C1305



### G-TEK® SEAMLESS KNIT COTTON/ POLYESTER GLOVE WITH LATEX COATED CRINKLE GRIP ON PALM & FINGERS - REGULAR GRADE

- Latex "Crinkle" coating provides superior grip in wet and dry conditions
- Knit Wrist helps prevent dirt and debris from entering the glove
- Seamless cotton/polyester knit shell is comfortable and flexible
- Ergonomic shaped curved finger pattern
- Breathable back for comfort

#### APPLICATIONS

- Assembly
- Construction
- Inspection
- Material handling
- Refuse handling
- Landscaping and gardening

#### CARE INSTRUCTIONS

Recommend washing gloves in slightly warm water not exceeding 40°C. A mild non-ionic detergent should be used. A 5-10 minute cycle time should be employed. Tumble dry on low - maximum temperature 140°F (60°C)

#### TECHNICAL DATA

MATERIAL	65% Polyester / 35% Cotton				
COLOR	Shell: ■ Gray / Coating: ■ Blue				
CUFF STYLE	Continuous Knit				
SIZES	XS - XL				
PACKAGING	12 pairs per dozen, 6 dozen per case				
CASE	8.3" x 11" x 27.5" / 70cm x 28cm x 21cm				
CASE WEIGHT	XS	S	M	L	XL
	14.3 lbs 6.5 kg	15.4 lbs 7 kg	16.5 lbs 7.5 kg	17.6 lbs 8 kg	18.7 lbs 8.5 kg
COO	China				



#### DIMENSIONS (in/cm)


	XS	S	M	L	XL
<b>A</b>	9.2 / 23.5	9.4 / 24	10 / 25.5	10.2 / 26	11 / 28
<b>B</b>	3.5 / 9	3.8 / 9.7	3.9 / 10	4.1 / 10.5	4.3 / 11
<b>H</b>	■ Purple	■ Red	■ Yellow	■ Brown	■ Black

#### PERFORMANCE PROPERTIES

EN388: 2142X						
ABRASION	0	1	2	3	4	5
CUT	0	1	2	3	4	5
TEAR	0	1	2	3	4	5
PUNCTURE	0	1	2	3	4	5
CUT (TDM-100)	A	B	C	D	E	F

#### BARCODES

ITEM	BAG	DOZEN	CASE
■ 39-C1305/XS	---	01616314046529	02616314046528
■ 39-C1305/S	---	01616314046536	02616314046535
■ 39-C1305/M	---	01616314046543	02616314046542
■ 39-C1305/L	---	01616314046550	02616314046559
■ 39-C1305/XL	---	01616314046567	02616314046566

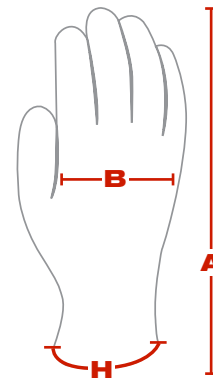

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

968 Albany Shaker Road | Latham, NY 12110 | 800-262-5755 | 518-861-0133 | Fax: 518-861-0144 | sales@pipusa.com | www.pipusa.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.