



SPECIFICATION SHEET

16-813



G-TEK® CR 13 GAUGE POLYKOR™ BLENDED SHELL WITH LATEX CRINKLE PALM COAT

- PolyKor™ blended shell is lightweight and provides excellent dexterity, tactile sensitivity and cut resistance
- Seamless construction offers increased comfort and breathability
- Latex "crinkle" finish provides superior grip in wet/dry conditions and offers abrasion resistance
- Knit Wrist helps prevent dirt and debris from entering the glove
- Cotton color binding denotes sizing
- Washable, resistant to chemicals, water, and ultraviolet light
- Compliant with FDA Part 177 - Indirect food activities: Polymers. Subpart C - Substances for use only as components of articles intended for repeated use. Sec. 177.2600

APPLICATIONS

- Electronics
- Glass cutting
- Sheet metal handling
- Parts assembly
- Sharp small parts handling
- Construction

CARE INSTRUCTIONS

Recommend washing gloves in slightly warm water not exceeding 40°C. A mild non-ionic detergent should be used. A 5-10 minute cycle time should be employed. Tumble dry on low - maximum temperature 140°F (60°C)

TECHNICAL DATA

MATERIAL	Shell: PolyKor™ / Coating: Latex					
COLOR	Shell: <input type="checkbox"/> White / Coating: <input checked="" type="checkbox"/> Yellow					
CUFF STYLE	Continuous Knit					
SIZES	XS - XXL					
PACKAGING	12 pairs per dozen, 6 dozen per case					
COMPLIANT WITH	FDA PART 177 - Indirect food activities: Polymers. Subpart C - Substances for use only as components of articles intended for repeated use. Sec. 177.2600					
CASE	28.3" x 11.8" x 7.9" / 72cm x 30cm x 20cm					
CASE WEIGHT	XS	S	M	L	XL	XXL
	10.8 lbs 4.9 kg	11.5 lbs 5.2 kg	13.2 lbs 6.0 kg	14.1 lbs 6.4 kg	15.9 lbs 7.2 kg	17.2 lbs 7.8 kg
COO	China					

BARCODES

ITEM	BAG	DOZEN	CASE
16-813/XS	616314168680	01616314168689	02616314168688
16-813/S	616314168666	01616314168665	02616314168664
16-813/M	616314168659	01616314168658	02616314168657
16-813/L	616314168642	01616314168641	02616314168640
16-813/XL	616314168673	01616314168672	02616314168671
16-813/XXL	616314168697	01616314168696	02616314168695




PERFORMANCE PROPERTIES

EN388: 3343	ASTM F2992-15 ANSI Cut Level A2 (Adopted by ANSI/ISEA 02/16)					
	ASTM F1790-05 ANSI Cut Level 2					
ABRASION	0	1	2	3	4	5
CUT	0	1	2	3	4	5
TEAR	0	1	2	3	4	5
PUNCTURE	0	1	2	3	4	5

DIMENSIONS (in/cm)

	XS	S	M	L	XL	XXL
A	8.3 / 21.0	8.7 / 22.0	9.3 / 23.5	9.8 / 25.0	10.4 / 26.5	10.6 / 27.0
B	3.3 / 8.5	3.5 / 9.0	3.7 / 9.5	3.9 / 10	4.1 / 10.5	4.5 / 11.5
H						

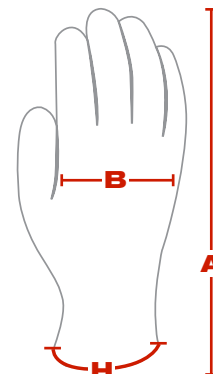

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.