



SPECIFICATION SHEET

19-D330



G-TEK® 3GX® SEAMLESS KNIT DYNEEMA® DIAMOND BLENDED GLOVE WITH POLYURETHANE COATED SMOOTH GRIP - 13 GAUGE

- Washable, resistant to chemicals, water and ultraviolet light
- Color coded hems for easy size identification
- Polyurethane coatings offer great puncture and abrasion resistance while offering excellent tactile sensitivity
- Dyneema® Diamond shell is lightweight and provides excellent dexterity, tactile sensitivity and cut resistance

APPLICATIONS

- Electronics
- Glass cutting
- Metal handling
- Food processing
- Meat processing

CARE INSTRUCTIONS

Recommend washing gloves in slightly warm water not exceeding 40°C. A mild non-ionic detergent should be used. A 5-10 minute cycle time should be employed. Tumble dry on low - maximum temperature 140°F (60°C)

TECHNICAL DATA

| | | | | | | | |
|-----------------|---|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| MATERIAL | Dyneema® Diamond Technology, Polyurethane | | | | | | |
| COLOR | Shell: <input type="checkbox"/> White / Coating: <input checked="" type="checkbox"/> Gray | | | | | | |
| CUFF STYLE | Continuous Knit | | | | | | |
| SIZES | XS - XXXL | | | | | | |
| PACKAGING | 1 pair per bag, 12 pairs per dozen, 6 dozen per case | | | | | | |
| CASE DIMENSIONS | 11.8" x 12.6" x 14.2" / 30cm x 32cm x 36cm | | | | | | |
| CASE WEIGHT | XS | S | M | L | XL | XXL | XXXL |
| | 10.4 lbs 4.7 kg | 10.8 lbs 4.9 kg | 11.2 lbs 5.1 kg | 12.1 lbs 5.5 kg | 13.2 lbs 6.0 kg | 14.1 lbs 6.4 kg | 14.3 lbs 6.5 kg |
| COO | China | | | | | | |



DIMENSIONS (in/cm)


| | XS | S | M | L | XL | XXL | XXXL |
|----------|--|---|--|---|---|--|--|
| A | 8.7 / 22 | 10.2 / 25.8 | 10.5 / 26.6 | 10.6 / 27 | 10.9 / 27.6 | 11.3 / 28.6 | 11.8 / 27.5 |
| B | 3.3 / 8.5 | 3.9 / 10 | 4.1 / 10.5 | 4.3 / 11 | 4.5 / 11.5 | 4.6 / 11.8 | 4.5 / 11.5 |
| H | <input checked="" type="checkbox"/> Purple | <input checked="" type="checkbox"/> Red | <input checked="" type="checkbox"/> Yellow | <input checked="" type="checkbox"/> Brown | <input checked="" type="checkbox"/> Black | <input checked="" type="checkbox"/> Sky Blue | <input checked="" type="checkbox"/> Gray |

PERFORMANCE PROPERTIES

| | | | | | | |
|--------------------|--|---|---|---|---|---|
| EN388: 4542 | ASTM F2992-15 ANSI Cut Level A4 (Adopted by ANSI/ISEA 02/16) ASTM F1790-05 ANSI Cut Level 4 | | | | | |
| ABRASION | 0 | 1 | 2 | 3 | 4 | 5 |
| CUT | 0 | 1 | 2 | 3 | 4 | 5 |
| TEAR | 0 | 1 | 2 | 3 | 4 | 5 |
| PUNCTURE | 0 | 1 | 2 | 3 | 4 | 5 |

BARCODES

| ITEM | BAG | DOZEN | CASE |
|--|-----|----------------|----------------|
| <input checked="" type="checkbox"/> 19-D330/XS | --- | 01616314095787 | 01616314095786 |
| <input checked="" type="checkbox"/> 19-D330/S | --- | 01616314095763 | 01616314095762 |
| <input checked="" type="checkbox"/> 19-D330/M | --- | 01616314095732 | 01616314095731 |
| <input checked="" type="checkbox"/> 19-D330/L | --- | 01616314095749 | 01616314095748 |
| <input checked="" type="checkbox"/> 19-D330/XL | --- | 01616314095756 | 01616314095755 |
| <input checked="" type="checkbox"/> 19-D330/XXL | --- | 01616314095770 | 01616314095779 |
| <input checked="" type="checkbox"/> 19-D330/XXXL | --- | 01616314095795 | 02616314131194 |

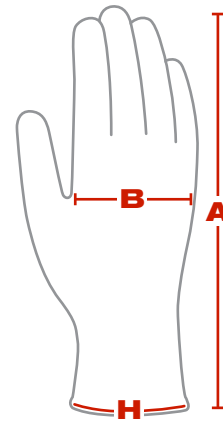

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.