



SPECIFICATION SHEET

33-825



G-TEK® MEDIUM WEIGHT SEAMLESS KNIT NYLON GLOVE WITH POLYURETHANE COATED SMOOTH GRIP

- 13 gauge, medium weight seamless knit nylon shell offers increased comfort, finger dexterity and breathability
- Polyurethane (PU) coatings offer great puncture and abrasion resistance while offering excellent tactile sensitivity
- Knit Wrist helps prevent dirt and debris from entering the glove
- Breathable back for comfort
- CFIA Approved

APPLICATIONS

- Electronic and computer assembly
- Quality control
- Inspection
- General assembly

CARE INSTRUCTIONS

Recommend washing gloves in tempered water not exceeding 104° F or 40°C. A mild non-ionic laundry soap or detergent should be used. Wash in a 5-10 minute cycle time. Rinse in cold water. Tumble dry at temperature not exceeding 140° F or 60° C.

TECHNICAL DATA

| | | | | | | |
|-------------|--|--------------------|--------------------|--------------------|---------------------|---------------------|
| MATERIAL | Polyester with polyurethane coating on palm and fingers | | | | | |
| COLOR | Shell: ■ Green, Coating: ■ Black | | | | | |
| CUFF STYLE | Continuous Knit | | | | | |
| SIZES | XS - XXL | | | | | |
| PACKAGING | 1 pair per bag, 12 pairs per dozen, 25 dozen per case | | | | | |
| CASE | 24.8" x 11.0" x 18.1" / 63cm x 28cm x 46cm | | | | | |
| CASE WEIGHT | XS | S | M | L | XL | XXL |
| | 17.6 lbs 8.0 kg | 18.7 lbs 8.5 kg | 19.8 lbs 9.0 kg | 20.9 lbs 9.5 kg | 22.0 lbs 10.0 kg | 23.1 lbs 10.5 kg |
| COO | China | | | | | |



DIMENSIONS (in/cm)

| | XS | S | M | L | XL | XXL |
|----------|--|--|--|--|--|--|
| A | 7.5 / 19.0 | 8.5 / 21.5 | 8.9 / 22.5 | 9.3 / 23.5 | 9.6 / 24.5 | 10.0 / 25.5 |
| B | 3.2 / 8.2 | 3.3 / 8.4 | 3.4 / 8.7 | 3.7 / 9.5 | 3.9 / 9.9 | 4.1 / 10.3 |
| H | ■ Purple | ■ Red | ■ Yellow | ■ Brown | ■ Black | ■ Blue |


PERFORMANCE PROPERTIES

EN388: 3121 ASTM F2992-15 ANSI Cut Level A1 (Adopted by ANSI/ISEA 02/16)
ASTM F1790-05 ANSI Cut Level 1

| | 0 | 1 | 2 | 3 | 4 | 5 |
|----------|---|---|---|---|---|---|
| ABRASION | 0 | 1 | 2 | 3 | 4 | 5 |
| CUT | 0 | 1 | 2 | 3 | 4 | 5 |
| TEAR | 0 | 1 | 2 | 3 | 4 | 5 |
| PUNCTURE | 0 | 1 | 2 | 3 | 4 | 5 |

BARCODES

| ITEM | BAG | DOZEN | CASE |
|---|-----|----------------|----------------|
| ■ 33-825/XS | --- | 01616314092052 | 02616314092051 |
| ■ 33-825/S | --- | 01616314092069 | 02616314092068 |
| ■ 33-825/M | --- | 01616314092076 | 02616314092075 |
| ■ 33-825/L | --- | 01616314092083 | 02616314092082 |
| ■ 33-825/XL | --- | 01616314092090 | 02616314092099 |
| ■ 33-825/XXL | --- | 01616314092106 | 02616314092105 |

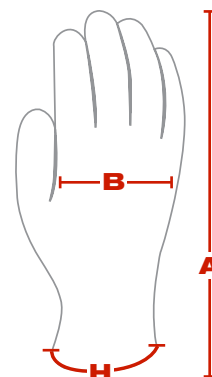

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.