

Use this number when searching for this item:

9006090102000

Drill, 10.2mm 5xD 3Flt, GS 200 U, Carbide, TiN

9006090102000

609

TiN

No

RH

5xD

150°

h7

Carbide

Straight

GS 200 U

10.200



>> Item Info

EDP#

Series

Coating

Material

Shank

Type

Tolerance

Point Angle

Order Code

Coolant Through

Cutting Direction


Drilling Depth

>> Features

>> Suggested Materials

- Aluminum
- Alloyed Steels
- Free Cutting Steels
- Tool Steels
- Stainless Steels
- Ti and Ti-alloys
- Cast Iron
- Brass
- Bronze
- Copper
- Magnesium
- Special Alloys
- Plastic
- Hardened Steels

>> Technical Specs

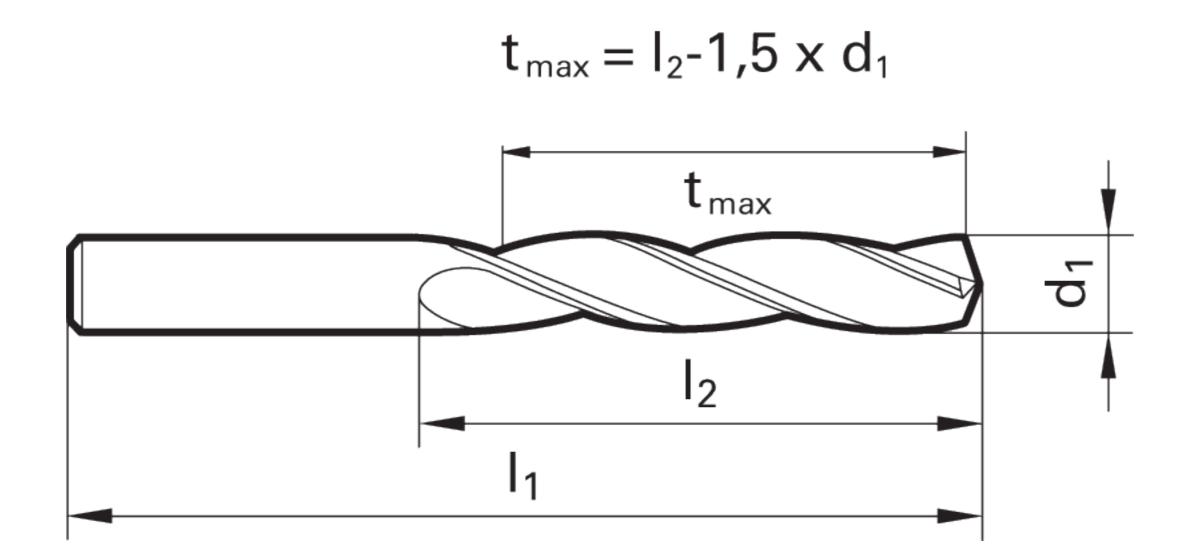

		Cut Ø	Cut Ø	Cut Ø	Cut Ø	Shank Ø	OAL	Flute Length	Drilling Depth	Drilling Depth		
EDP#	Code No.	d1	d1	d1	d1	d2	I1	12	tmax	tmax	Shank Type	Flutes
		mm	inch	frac.	wire / letter	mm	mm	mm	mm	inch		
90060901020	10.200	10.200	0.4016			10.200	89.00	55.00	39.70	1.563	Straight	3



^{***} **DISCLAIMER:** Data on this PDF is subject to change at any time without notice.