

Use this number when searching for this item:

9006090115100

Drill, 29/64 5xD 3Flt, GS 200 U, Carbide, TiN



>> Item Info


>> Features

>> Suggested Materials

EDP #	9006090115100
Series	609
Order Code	11.510
Coating	TiN
Coolant Through	No
Cutting Direction	RH
Drilling Depth	5xD
Material	Carbide
Point Angle	150°
Shank	Straight
Type	GS 200 U
Tolerance	h7

- Aluminum
- Alloyed Steels
- Free Cutting Steels
- Tool Steels
- Stainless Steels
- Ti and Ti-alloys
- Cast Iron
- Brass
- Bronze
- Copper
- Magnesium
- Special Alloys
- Plastic
- Hardened Steels

>> Technical Specs

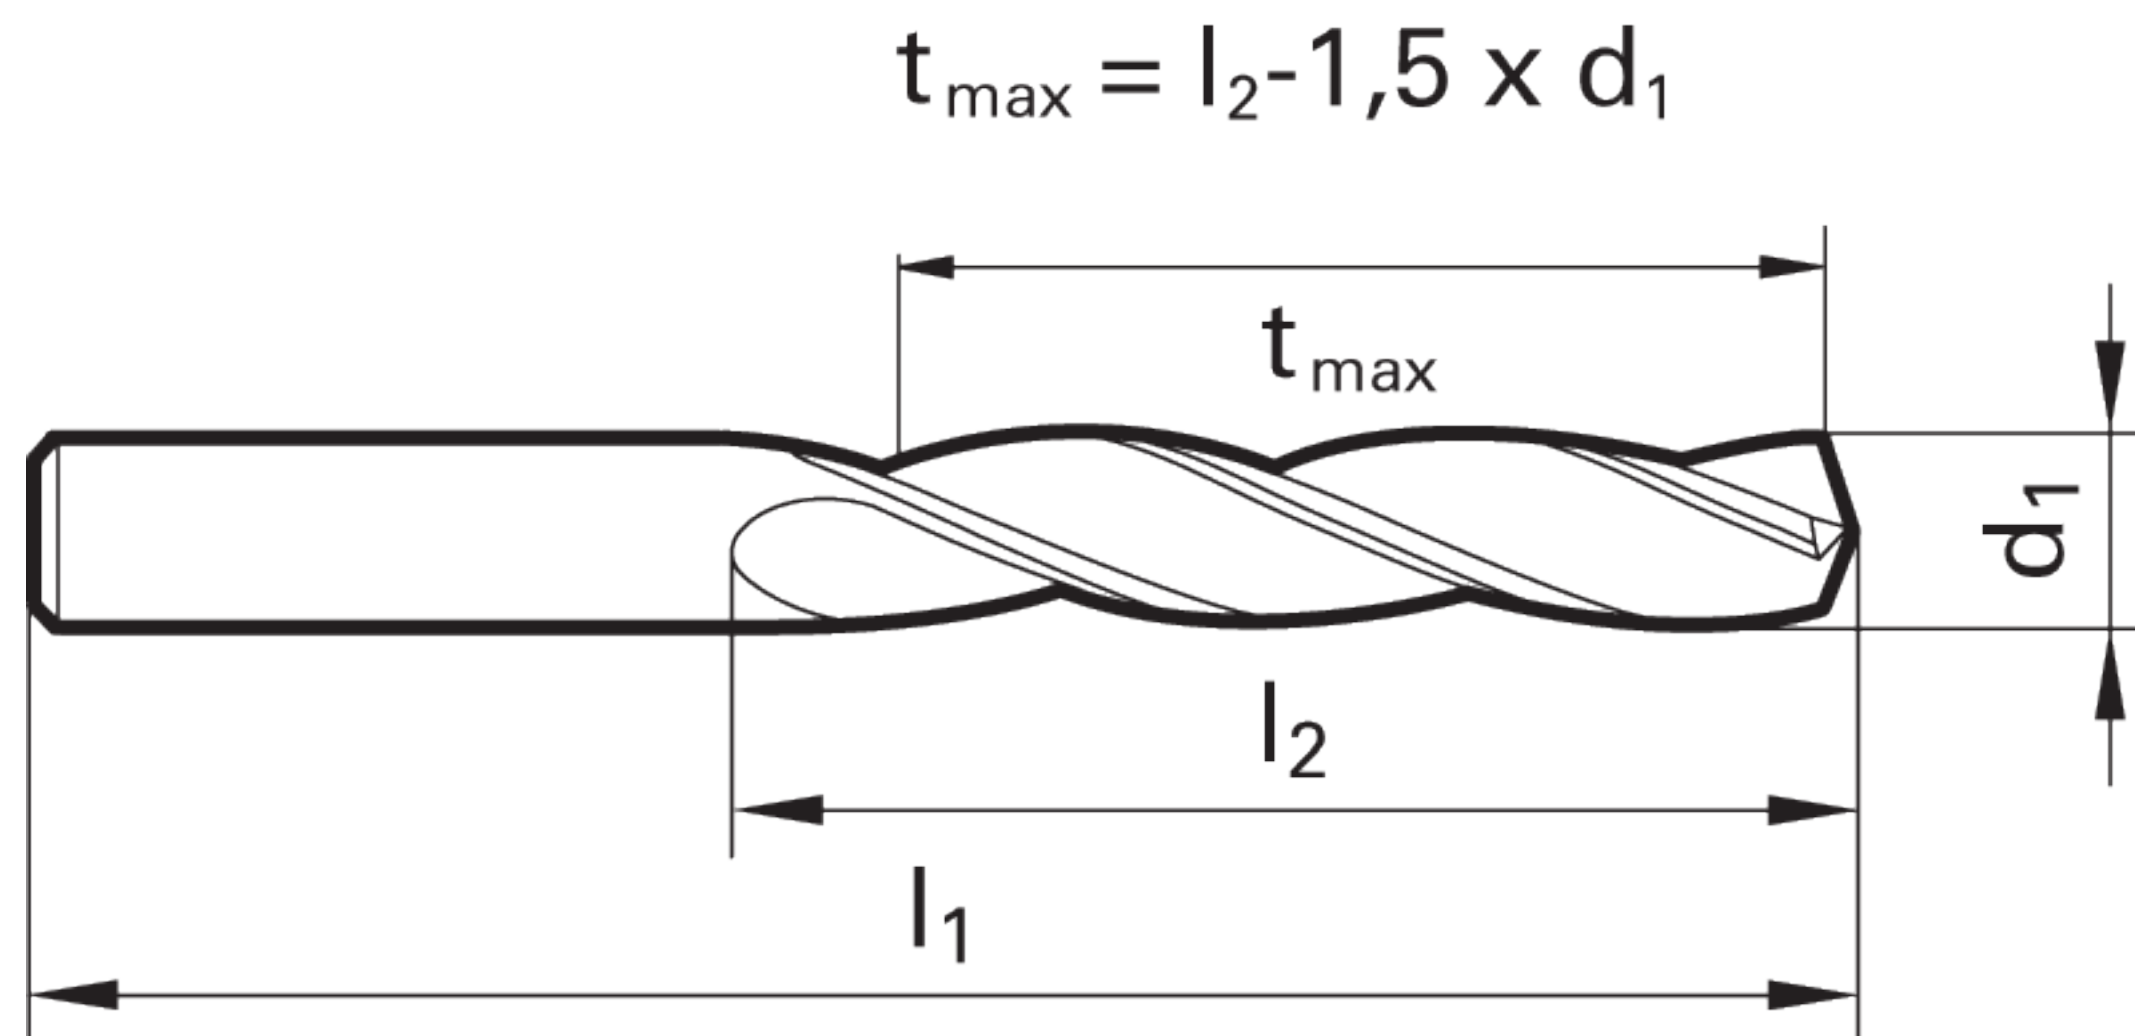

EDP #	Code No.	Cut Ø d1 mm	Cut Ø d1 inch	Cut Ø d1 frac.	Cut Ø d1 wire / letter	Shank Ø d2 mm	OAL l1 mm	Flute Length l2 mm	Drilling Depth tmax mm	Drilling Depth tmax inch	Shank Type	Flutes
9006090115100	11.510	11.510	0.4531	29/64		11.510	95.00	60.00	42.74	1.683	Straight	3



WARNING:
This product contains Cobalt, a chemical known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov

*** **DISCLAIMER:** Data on this PDF is subject to change at any time without notice.