

Use this number when searching for this item:

9006090119100

Drill, 15/32 5xD 3Flt, GS 200 U, Carbide, TiN

9006090119100

609

TiN

No

RH

5xD

150°

h7

Carbide

Straight

GS 200 U

11.910



>> Item Info

EDP#

Series

Coating

Material

Shank

Type

Tolerance

Point Angle

Order Code

Coolant Through

Cutting Direction


Drilling Depth

>> Features

>> Suggested Materials

- Aluminum
- Alloyed Steels
- Free Cutting Steels
- Tool Steels
- Stainless Steels
- Ti and Ti-alloys
- Cast Iron
- Brass
- Bronze
- Copper
- Magnesium
- Special Alloys
- Plastic
- Hardened Steels

>> Technical Specs

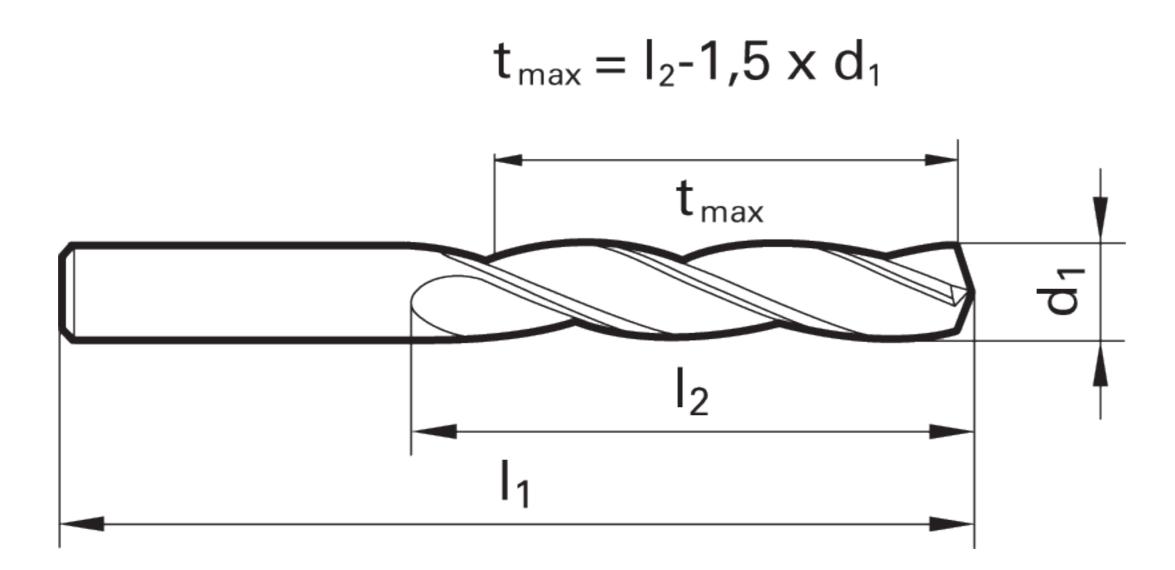

		Cut Ø	Cut Ø	Cut Ø	Cut Ø	Shank Ø	OAL	Flute Length	Drilling Depth	Drilling Depth		
EDP#	Code No.	d1	d1	d1	d1	d2	I1	12	tmax	tmax	Shank Type	Flutes
		mm	inch	frac.	wire / letter	mm	mm	mm	mm	inch		
90060901191	11.910	11.910	0.4689	15/32		11.910	102.00	65.00	47.14	1.856	Straight	3



*** **DISCLAIMER:** Data on this PDF is subject to change at any time without notice.