

Use this number when searching for this item:

### 9006090126000

#### Drill, 12.6mm 5xD 3Flt, GS 200 U, Carbide, TiN



### >> Item Info

EDP#

Series

Coating

Material

Shank

Type

Tolerance

**Point Angle** 

**Order Code** 

**Coolant Through** 

**Cutting Direction** 

**Drilling Depth** 

# 9006090126000 609 12.600 TiN No RH 5xD

Carbide

Straight

GS 200 U

150°

h7

#### >> Features


## >> Suggested Materials

- Aluminum
- Alloyed Steels
- Free Cutting Steels
- Tool Steels
- Stainless Steels
- Ti and Ti-alloys
- Cast Iron
- Brass
- Bronze

- Copper

- Magnesium
- Special Alloys
- Plastic
- Hardened Steels

# >> Technical Specs

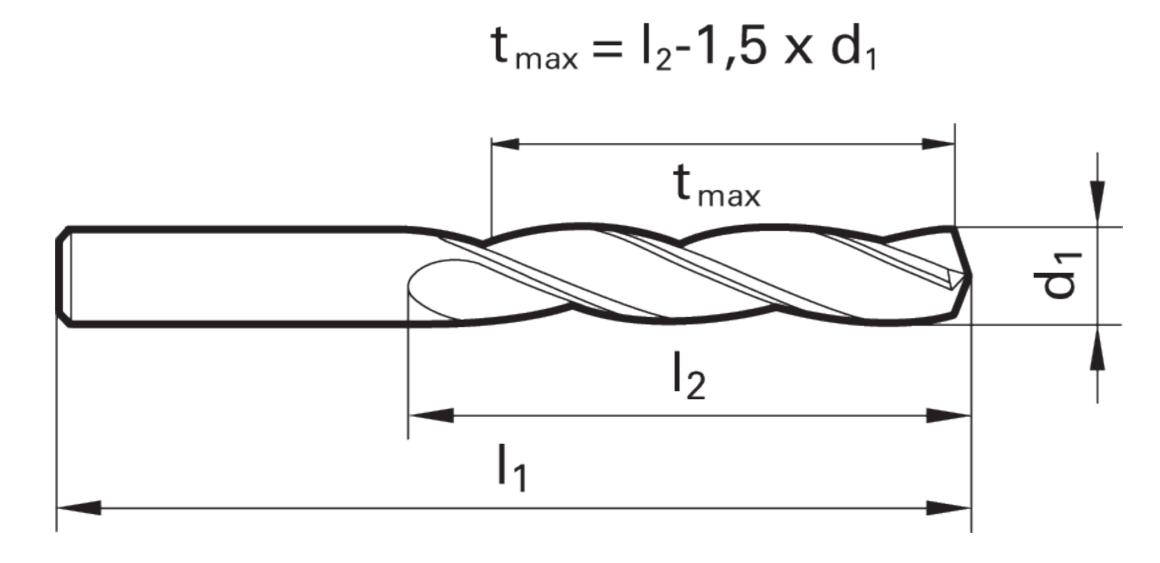

		Cut Ø	Cut Ø	Cut Ø	Cut Ø	Shank Ø	OAL	Flute Length	Drilling Depth	Drilling Depth		
EDP#	Code No.	d1	d1	d1	d1	d2	l1	I2	tmax	tmax	Shank Type	Flutes
		mm	inch	frac.	wire / letter	mm	mm	mm	mm	inch		
90060901260	12.600	12.600	0.4961			12.600	102.00	65.00	46.10	1.815	Straight	3



\*\*\* **DISCLAIMER:** Data on this PDF is subject to change at any time without notice.