

Use this number when searching for this item:

## 9006090150000

### Drill, 15mm 5xD 3Flt, GS 200 U, Carbide, TiN



## >> Item Info

EDP#

Series

Coating

Material

Shank

Type

Tolerance

**Point Angle** 

**Order Code** 

**Coolant Through** 

**Cutting Direction** 

**Drilling Depth** 

9006090150000

609

TiN

No

RH

5xD

150°

h7

Carbide

Straight

GS 200 U


15.000

# >> Features

## >> Suggested Materials

- Aluminum
- Alloyed Steels
- Free Cutting Steels
- Tool Steels
- Stainless Steels
- Ti and Ti-alloys
- Cast Iron
- Brass
- Bronze
- Copper
- Magnesium
- Special Alloys
- Plastic
- Hardened Steels

## >> Technical Specs

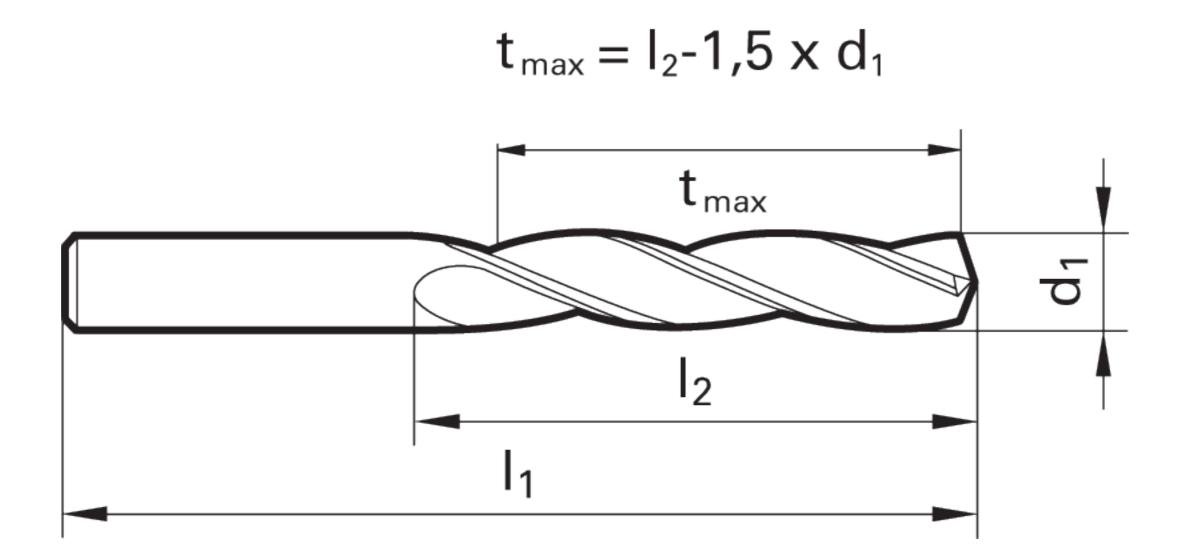

		Cut Ø	Cut Ø	Cut Ø	Cut Ø	Shank Ø	OAL	Flute Length	Drilling Depth	Drilling Depth		
EDP#	Code No.	d1	d1	d1	d1	d2	I1	12	tmax	tmax	Shank Type	Flutes
		mm	inch	frac.	wire / letter	mm	mm	mm	mm	inch		
90060901500	15.000	15.000	0.5906			15.000	111.00	70.00	47.50	1.870	Straight	3



\*\*\* **DISCLAIMER:** Data on this PDF is subject to change at any time without notice.