

Use this number when searching for this item:

9006090154000

Drill, 15.4mm 5xD 3Flt, GS 200 U, Carbide, TiN



>> Item Info

Type

Tolerance

EDP# 9006090154000 Series 609 **Order Code** 15.400 Coating TiN **Coolant Through** No **Cutting Direction** RH **Drilling Depth** 5xD Carbide Material 150° **Point Angle** Shank Straight

GS 200 U


h7

>> Features

>> Suggested Materials

- Aluminum
- Alloyed Steels
- Free Cutting Steels
- Tool Steels
- Stainless Steels
- Ti and Ti-alloys
- Cast Iron
- Brass
- Bronze
- Copper
- Magnesium
- Special Alloys
- Plastic
- Hardened Steels

>> Technical Specs

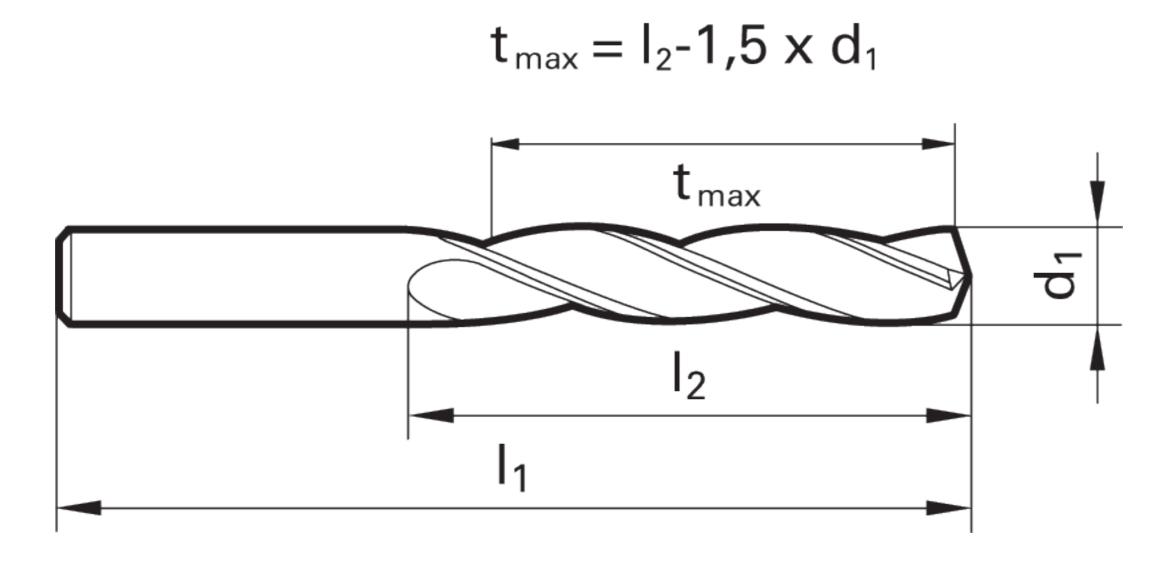

		Cut Ø	Cut Ø	Cut Ø	Cut Ø	Shank Ø	OAL	Flute Length	Drilling Depth	Drilling Depth		
EDP#	Code No.	d1	d1	d1	d1	d2	l1	I2	tmax	tmax	Shank Type	Flutes
		mm	inch	frac.	wire / letter	mm	mm	mm	mm	inch		
90060901540	15.400	15.400	0.6063			15.400	115.00	73.00	49.90	1.965	Straight	3



WARNING:

www.P65Warnings.ca.gov

This product contains Cobalt, a chemical known to the State of

California to cause cancer. For more information go to