

Use this number when searching for this item:

## 9006140031500 Center Drill, 3.15mm, HSS, TiN



## >> Item Info

9006140031500	- relieved cone
614	- increased wear resistance
3.150	- correct positioning between lathe centres
TiN	- for centre holes acc. to DIN 332 part 1, form R
No	- d1 = 0.8 mm: not double ended
RH	
HSS	
118°	
Straight	
Center Drill	
	614 3.150 TiN No RH HSS 118° Straight

## >> Features

- R

## >> Suggested Materials

- Aluminum
- Alloyed Steels
- Free Cutting Steels
- Tool Steels
- Stainless Steels
- Ti and Ti-alloys
- Cast Iron
- Brass
- Bronze


- Copper

- Plastic

- Magnesium

- Special Alloys

- Hardened Steels

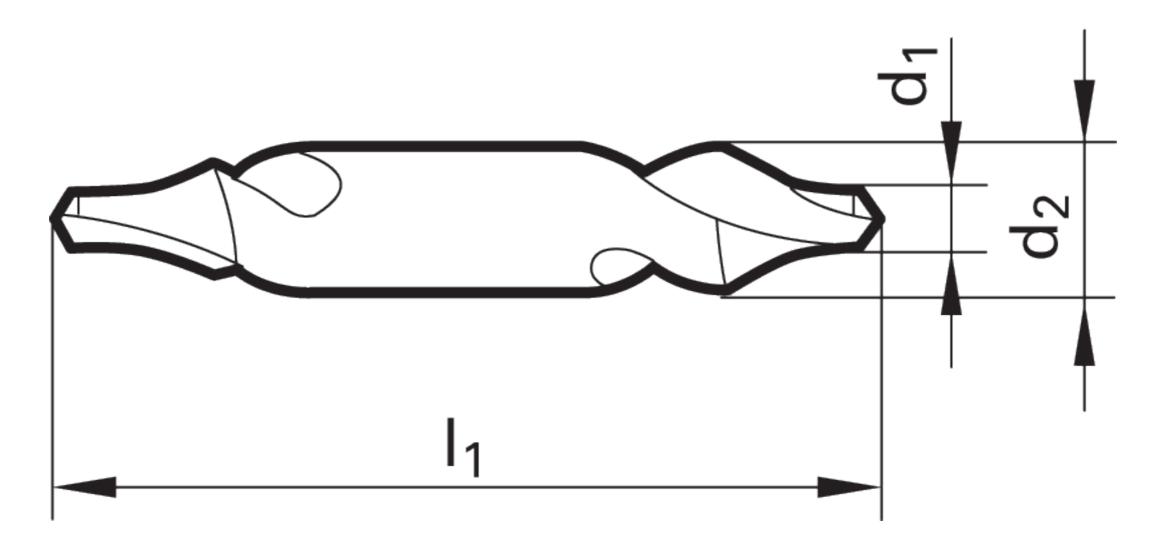

		Cut Ø	Cut Ø	Cut Ø	Cut Ø	Shank Ø	OAL	Flute Length	Drilling Depth	Drilling Depth		
EDP #	Code No.	d1	d1	d1	d1	d2	11	12	tmax	tmax	Shank Type	Flutes
		mm	inch	frac.	wire / letter	mm	mm	mm	mm	inch		
90061400315 00	3.150	3.150	0.1240			8.000	50.00	16.00	11.28	0.444	Straight	2

\*\*\* **DISCLAIMER:** Data on this PDF is subject to change at any time without notice.