


Use this number when searching for this item:

9006140050000 Center Drill, 5mm, HSS, TiN

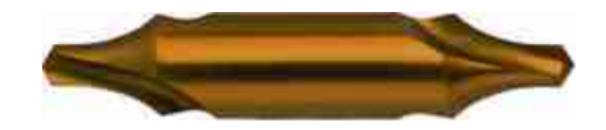


>> Item Info

9006140050000	- relieved cone
614	- increased wear resistance
5.000	 correct positioning between lathe centres
TiN	- for centre holes acc. to DIN 332 part 1, form R
No	- d1 = 0.8 mm: not double ended
RH	
HSS	
118°	
Straight	
Center Drill	
	614 5.000 TiN No RH HSS 118° Straight

>> Features

>> Suggested Materials

- Aluminum
- Alloyed Steels
- Free Cutting Steels
- Tool Steels
- Stainless Steels
- Ti and Ti-alloys
- Cast Iron
- Brass
- Bronze
- Copper
- Magnesium
- Special Alloys
- Plastic
- Hardened Steels

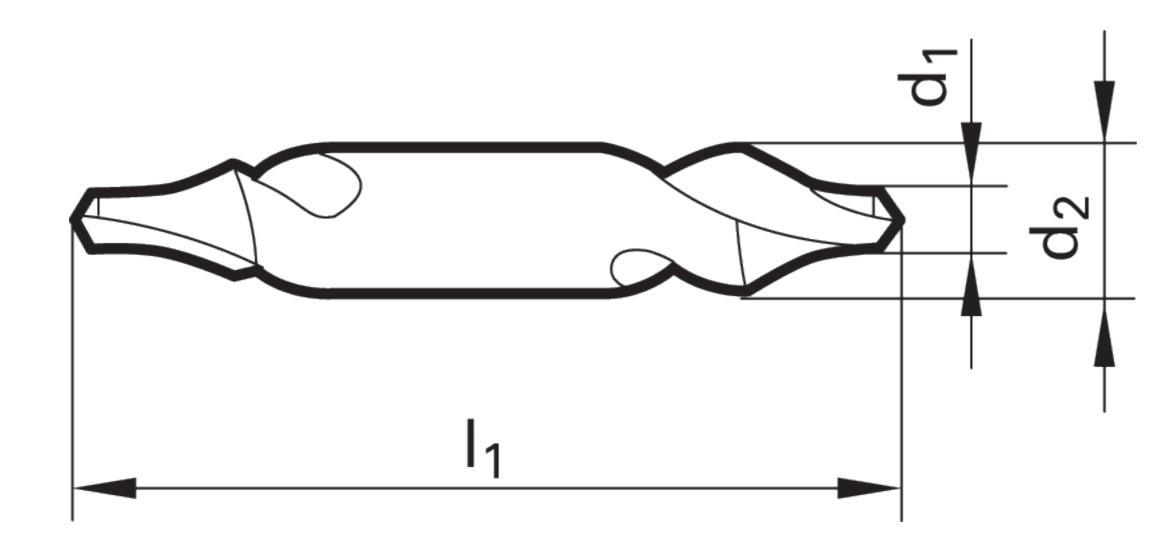

		Cut Ø	Cut Ø	Cut Ø	Cut Ø	Shank Ø	OAL	Flute Length	Drilling Depth	Drilling Depth		
EDP #	Code No.	d1	d1	d1	d1	d2	11	12	tmax	tmax	Shank Type	Flutes
		mm	inch	frac.	wire / letter	mm	mm	mm	mm	inch		
90061400500	5.000	5.000	0.1969			12.500	63.00	23.00	15.50	0.610	Straight	2

*** **DISCLAIMER:** Data on this PDF is subject to change at any time without notice.