

Extra Length

#2

S

TiN coated



External Coolant



Straight Shank


Speeds & Feeds
information pg 453

Series 671

GT 100 Parabolic

HSS, GT 100 deep hole, extra length #2, 130° point, Form A
web thinned all dia., standard straight shank, RH helix

Cut / Shank Dia. = h8 tolerance range

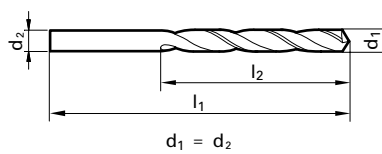

Application Materials:

-  General Steels/Brass
-  Aluminum & Alloys
-  Universal Steels

Dec. inch	Diameter (d1)		l1 mm	l2 mm	EDP #
	Fract. inch	Wire / letter			
0.1181			190.00	130.00	9006710030000
0.1220			200.00	135.00	9006710031000
0.1248	1/8		200.00	135.00	9006710031700
0.1260			210.00	145.00	9006710032000
0.1339			210.00	145.00	9006710034000
0.1378			210.00	145.00	9006710035000
0.1406	9/64	28	210.00	145.00	9006710035700
0.1496		25	220.00	150.00	9006710038000
0.1563	5/32		220.00	150.00	9006710039700
0.1575			220.00	150.00	9006710040000
0.1610		20	220.00	150.00	9006710040900
0.1673			220.00	150.00	9006710042500
0.1720	11/64		235.00	160.00	9006710043700
0.1732			235.00	160.00	9006710044000
0.1772		16	235.00	160.00	9006710045000
0.1811			235.00	160.00	9006710046000
0.1874	3/16		245.00	170.00	9006710047600
0.1890		12	245.00	170.00	9006710048000
0.1969			245.00	170.00	9006710050000
0.2008			245.00	170.00	9006710051000

Dec. inch	Diameter (d1)		l1 mm	l2 mm	EDP #
	Fract. inch	Wire / letter			
0.2087			245.00	170.00	9006710053000
0.2165			260.00	180.00	9006710055000
0.2189	7/32		260.00	180.00	9006710055600
0.2343	15/64		260.00	180.00	9006710059500
0.2362			260.00	180.00	9006710060000
0.2402			275.00	190.00	9006710061000
0.2500	1/4	E	275.00	190.00	9006710063500
0.2520			275.00	190.00	9006710064000
0.2559			275.00	190.00	9006710065000
0.2677			290.00	200.00	9006710068000
0.2756			290.00	200.00	9006710070000
0.2953			290.00	200.00	9006710075000
0.3126	5/16		305.00	210.00	9006710079400
0.3150			305.00	210.00	9006710080000

Alternative Drill Series:

- #503 HSS, GT100, >10xD, 130 pt, Bright
- #619 Cobalt, GT100, >10xD, 130 pt, Bright