

Use this number when searching for this item:

9024790078000

Drill, 7.8mm 5xD, RT 100 X, Carbide, nano-FIREX, Coolant through



>> Item Info

EDP #	9024790078000
Series	2479
Order Code	7.800
Coating	nano-FIREX
Coolant Through	Yes
Cutting Direction	RH
Drilling Depth	5xD
Material	Carbide
Point Angle	140°
Shank	HA

>> Features

- facet point grind
- main cutting edge form straight
- optimized cutting geometry

>> Suggested Materials


- Aluminum
- Alloyed Steels
- Free Cutting Steels
- Tool Steels
- Stainless Steels
- Ti and Ti-alloys
- Cast Iron
- Brass
- Bronze
- Magnesium

Туре	RT 100 X
Tolerance	m7

- Special Alloys

- Hardened Steels

>> Technical Specs

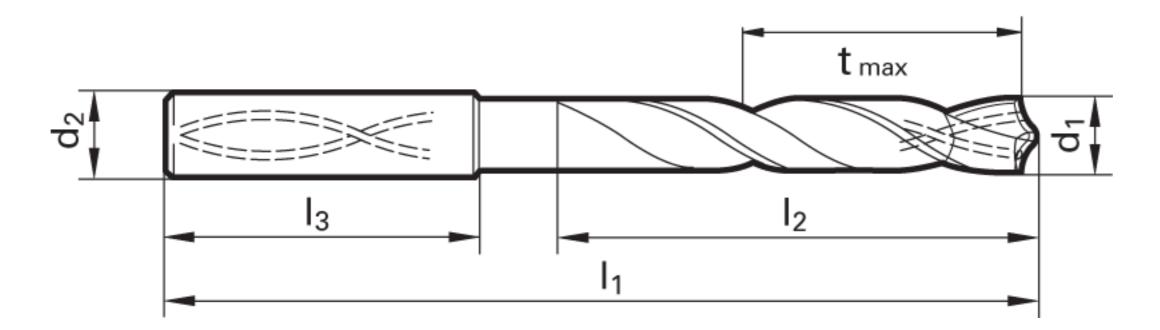

		Cut Ø	Cut Ø	Cut Ø	Cut Ø	Shank Ø	OAL	Flute Length	Drilling Depth	Drilling Depth	Shank Length		
EDP #	Code No.	d1	d1	d1	d1	d2	11	12	tmax	tmax	13	Shank Type	Flutes
		mm	inch	frac.	wire / letter	mm	mm	mm	mm	inch	mm		
9024790078 000	7.800	7.800	0.3071			8.00	91.00	53.00	41.30	1.626	36.00	Straight	2



*** **DISCLAIMER:** Data on this PDF is subject to change at any time without notice.

WARNING:

This product contains Cobalt, a chemical known to the State of California to cause cancer. For more information go to

www.P65Warnings.ca.gov