

Use this number when searching for this item:

## 9040440057000

### Drill, 5.7mm 7xD, RT 100 X, Carbide, nano-FIREX, Coolant through



### >> Item Info

EDP#	9040440057000
Series	4044
Order Code	5.700
Coating	nano-FIREX
Coolant Through	Yes
Cutting Direction	RH
Drilling Depth	7xD
Material	Carbide
Point Angle	140°
Shank	НА
Туре	RT 100 X
Tolerance	m7

#### >> Features

// Caluics


- facet point grind

- main cutting edge form straight
- optimized cutting geometry
- double margin

## >> Suggested Materials

- Aluminum
- Alloyed Steels
- Free Cutting Steels
- Tool Steels
- Stainless Steels
- Ti and Ti-alloys
- Cast Iron
- Brass
- Bronze
- Magnesium
- Special Alloys
- Hardened Steels

# >> Technical Specs

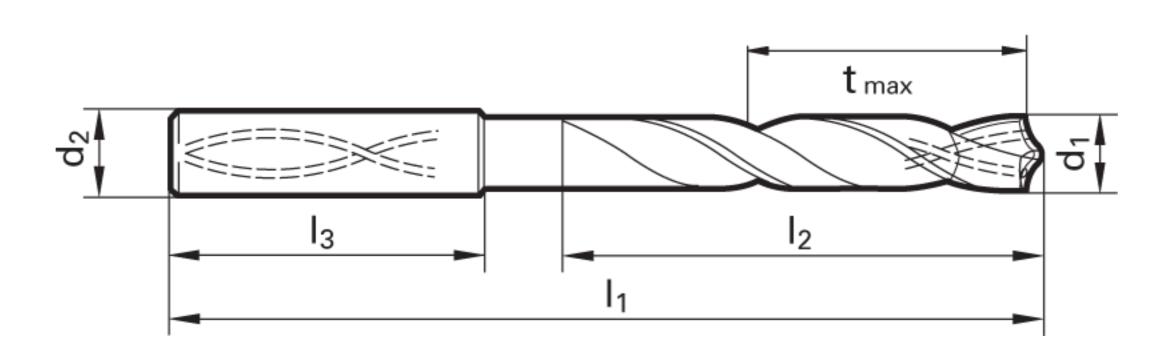

		Cut Ø	Cut Ø	Cut Ø	Cut Ø	Shank Ø	OAL	Flute Length	Drilling Depth	Drilling Depth	Shank Length		
EDP#	Code No.	d1	d1	d1	d1	d2	I1	12	tmax	tmax	13	Shank Type	Flutes
		mm	inch	frac.	wire / letter	mm	mm	mm	mm	inch	mm		
9040440057	5.700	5.700	0.2244			6.00	97.00	57.00	48.45	1.907	36.00	Straight	2



\*\*\* **DISCLAIMER:** Data on this PDF is subject to change at any time without notice.

WARNING:
This product contains Cobalt, a chemical known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov