


**UNC**



**Series 4134**  
**Thread Depth 2 X D**  
**Tool Material Coolant Fed Carbide**  
**Coating TiCN**  
**Shank HA (round)**  
**Countersink No**

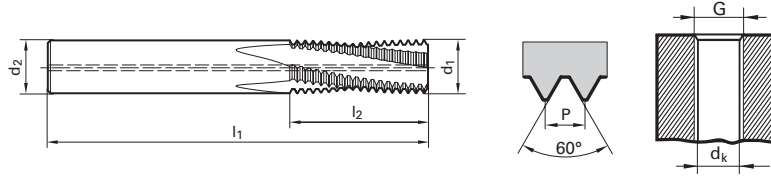

UNC Size	dk inch	d1 mm	d2 mm	l1 mm	l2 mm	No. flutes	4134 EDP #
10 -24	0.154	3.400	6.000	54.000	11.100	3	9041340048260
12 -24	0.177	4.100	6.000	54.000	12.200	3	9041340054860
1/4 -20	0.201	4.700	6.000	54.000	14.600	3	9041340063500
5/16-18	0.260	6.100	8.000	64.000	17.600	3	9041340079380
3/8 -16	0.315	7.600	8.000	64.000	21.400	3	9041340095250
7/16-14	0.370	9.000	10.000	74.000	24.500	3	9041340111130
1/2 -13	0.425	9.950	10.000	74.000	28.300	4	9041340127000
9/16-12	0.480	11.400	12.000	90.000	30.700	4	9041340142880
5/8 -11	0.531	12.700	14.000	90.000	35.800	4	9041340158750

**UNC**



**Series 4135**  
**Thread Depth 2 X D**  
**Tool Material Coolant Fed Carbide**  
**Coating TiCN**  
**Shank HB (w/flat)**  
**Countersink No**

UNC Size	dk inch	d1 mm	d2 mm	l1 mm	l2 mm	No. flutes	4135 EDP #
10 -24	0.154	3.400	6.000	54.000	11.100	3	9041350048260
12 -24	0.177	4.100	6.000	54.000	12.200	3	9041350054860
1/4 -20	0.201	4.700	6.000	54.000	14.600	3	9041350063500
5/16-18	0.260	6.100	8.000	64.000	17.600	3	9041350079380
3/8 -16	0.315	7.600	8.000	64.000	21.400	3	9041350095250
7/16-14	0.370	9.000	10.000	74.000	24.500	3	9041350111130
1/2 -13	0.425	9.950	10.000	74.000	28.300	4	9041350127000
9/16-12	0.480	11.400	12.000	90.000	30.700	4	9041350142880
5/8 -11	0.531	12.700	14.000	90.000	35.800	4	9041350158750