


HSK-A coolant delivery sets for conventional cooling

Product information

- leak-proof screwed connection tested to 80 bar
- to DIN 69895

Scope of delivery

- incl. union nut and O-rings

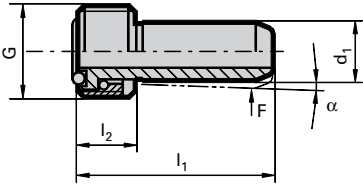

Series Number **4949**

| for HSK-A | d ₁ mm | α ° | F | G | l ₁ mm | l ₂ mm | EDP Numbers |
|-----------|-------------------|-----|----|---------|-------------------|-------------------|---------------|
| 32 | 6 | 1.2 | 5N | M10x1 | 26.0 | 5.5 | 9049490100320 |
| 40 | 8 | 1.4 | 5N | M12x1 | 29.5 | 7.5 | 9049490120400 |
| 50 | 10 | 1.3 | 6N | M16x1 | 33.0 | 9.5 | 9049490160500 |
| 63 | 12 | 1.3 | 6N | M18x1 | 36.5 | 11.5 | 9049490180630 |
| 80 | 14 | 1.4 | 7N | M20x1.5 | 40.0 | 13.5 | 9049490200800 |
| 100 | 16 | 1.4 | 7N | M24x1.5 | 44.0 | 15.5 | 9049490241000 |


Data coding chip

Product information

- Identification systems BIS C
- for installation space to DIN 69 873
- data carrier read/write
- 511 bytes
- operating temperature 0...+70
- protection class to IEC
- product data exchange acc. to DIN 4000
- glued in bore Ø10 H11

Scope of delivery

- data coding chip
- installation in chuck and additional balancing can be ordered separately



Series Number **4955**

| coding chip BIS C | EDP Numbers |
|-------------------|---------------|
| 10 x 4.5 | 9049550100000 |