

Use this number when searching for this item:

### 9055190026000

#### Drill, 2.6mm Jobber, GU 500 DZ, HSCO, TiN



#### >> Item Info

9055190026000
5519
2.600
TiN
No
RH
Jobber length
HSCO
118° Split Point
Straight
GU 500 DZ
h8

#### >> Features

- Co-alloyed high speed steel
- low feed force required
- low torque required


- facet point grind

- increased wear resistance
- for universal application
- split point

# >> Suggested Materials

- Aluminum
- Alloyed Steels
- Free Cutting Steels
- Tool Steels
- Stainless Steels
- Cast Iron
- Brass
- Bronze
- Copper
- Magnesium
- Plastic
- Hardened Steels

## >> Technical Specs

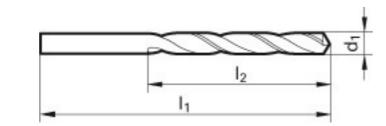

		Cut Ø	Cut Ø	Cut Ø	Cut Ø	Shank Ø	OAL	Flute Length	Drilling Depth	Drilling Depth		
EDP#	Code No.	d1	d1	d1	d1	d2	11	12	tmax	tmax	Shank Type	Flutes
		mm	inch	frac.	wire / letter	mm	mm	mm	mm	inch		
90551900260	2.600	2.600	0.1024			2.600	57.00	30.00	26.10	1.028	Straight	2



\*\*\* **DISCLAIMER:** Data on this PDF is subject to change at any time without notice.

WARNING:
This product contains Cobalt, a chemical known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov