

Use this number when searching for this item:

## 9056120063500

### Drill, 1/4 7xD, RT 100 U, Carbide, nano-FIREX, Coolant through



#### >> Item Info

EDP#	9056120063500
Series	5612
Order Code	6.350
Coating	nano-FIREX
Coolant Through	Yes
<b>Cutting Direction</b>	RH
Drilling Depth	7xD
Material	Carbide
Point Angle	140°
Shank	HE
Туре	RT 100 U
Tolerance	m7

#### >> Features


- facet point grind

- main cutting edge form straight
- optimized cutting geometry

## >> Suggested Materials

- Aluminum
- Alloyed Steels
- Free Cutting Steels
- Tool Steels
- Stainless Steels
- Ti and Ti-alloys
- Cast Iron
- Brass
- Bronze
- Copper
- Magnesium
- Special Alloys
- Hardened Steels

# >> Technical Specs

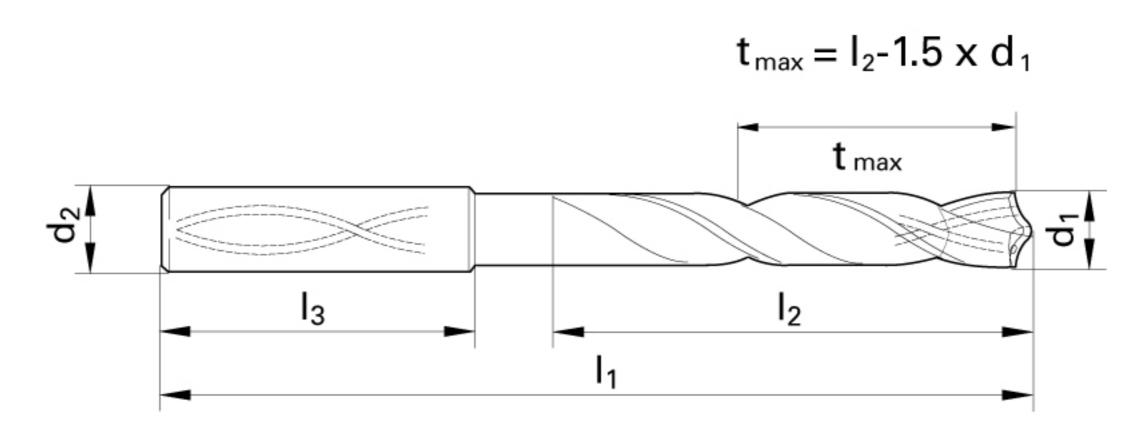

		Cut Ø	Cut Ø	Cut Ø	Cut Ø	Shank Ø	OAL	Flute Length	Drilling Depth	Drilling Depth	Shank Length		
EDP#	Code No.	d1	d1	d1	d1	d2	I1	12	tmax	tmax	13	Shank Type	Flutes
		mm	inch	frac.	wire / letter	mm	mm	mm	mm	inch	mm		
9056120063 500	6.350	6.350	0.2500	1/4	Е	8.00	106.00	66.00	56.48	2.224	36.00	whistle notch	2



\*\*\* **DISCLAIMER:** Data on this PDF is subject to change at any time without notice.

This product contains Cobalt, a chemical known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov