

Use this number when searching for this item:

9056120080000

Drill, 8mm 7xD, RT 100 U, Carbide, nano-FIREX, Coolant through



>> Item Info

9056120080000
5612
8.000
nano-FIREX
Yes
RH
7xD
Carbide
140°
HE
RT 100 U
m7

>> Features

// I caluics


- facet point grind

- main cutting edge form straight
- optimized cutting geometry

>> Suggested Materials

- Aluminum
- Alloyed Steels
- Free Cutting Steels
- Tool Steels
- Stainless Steels
- Ti and Ti-alloys
- Cast Iron
- Brass
- Bronze
- Copper
- Magnesium
- Special Alloys
- Hardened Steels

>> Technical Specs

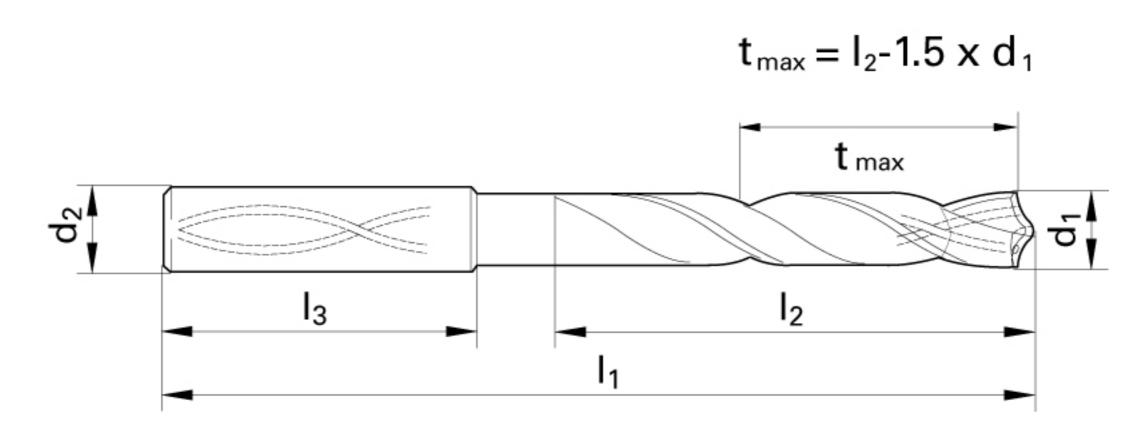

		Cut Ø	Cut Ø	Cut Ø	Cut Ø	Shank Ø	OAL	Flute Length	Drilling Depth	Drilling Depth	Shank Length		
EDP#	Code No.	d1	d1	d1	d1	d2	I1	12	tmax	tmax	13	Shank Type	Flutes
		mm	inch	frac.	wire / letter	mm	mm	mm	mm	inch	mm		
9056120080	8.000	8.000	0.3150			8.00	116.00	76.00	64.00	2.520	36.00	whistle notch	2



*** **DISCLAIMER:** Data on this PDF is subject to change at any time without notice.

WARNING:
This product contains Cobalt, a chemical known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov