

Use this number when searching for this item:

9056120110000

Drill, 11mm 7xD, RT 100 U, Carbide, nano-FIREX, Coolant through



>> Item Info

| EDP # | 9056120110000 |
|-------------------|---------------|
| Series | 5612 |
| Order Code | 11.000 |
| Coating | nano-FIREX |
| Coolant Through | Yes |
| Cutting Direction | RH |
| Drilling Depth | 7xD |
| Material | Carbide |
| Point Angle | 140° |
| Shank | HE |
| Туре | RT 100 U |
| Tolerance | m7 |

>> Features

- facet point grind
- main cutting edge form straight
- optimized cutting geometry


>> Suggested Materials

- Aluminum
- Alloyed Steels
- Free Cutting Steels
- Tool Steels
- Stainless Steels
- Ti and Ti-alloys
- Cast Iron
- Brass
- Bronze
- Copper

 $t_{max} = I_2 - 1.5 \times d_1$

- Magnesium
- Special Alloys
- Hardened Steels

>> Technical Specs

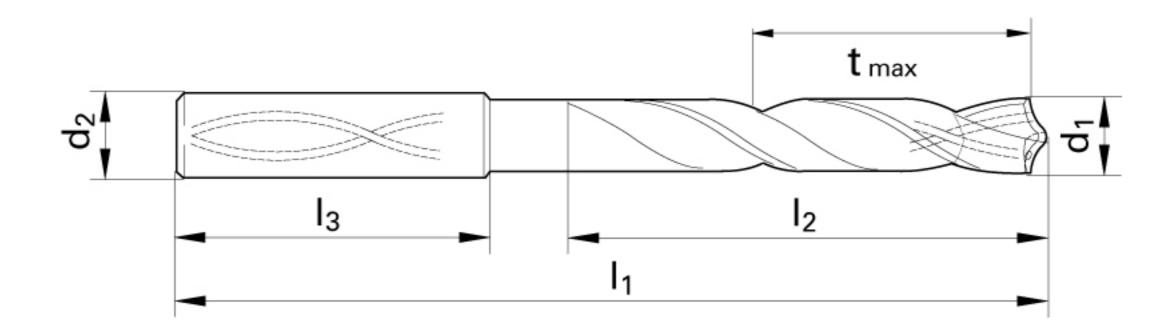

| | | Cut Ø | Cut Ø | Cut Ø | Cut Ø | Shank Ø | OAL | Flute Length | Drilling Depth | Drilling Depth | Shank Length | | |
|-------------------|----------|--------|--------|-------|---------------|---------|--------|--------------|----------------|----------------|--------------|---------------|--------|
| EDP # | Code No. | d1 | d1 | d1 | d1 | d2 | 11 | 12 | tmax | tmax | 13 | Shank Type | Flutes |
| | | mm | inch | frac. | wire / letter | mm | mm | mm | mm | inch | mm | | |
| 9056120110 000 | 11.000 | 11.000 | 0.4331 | | | 12.00 | 155.00 | 106.00 | 89.50 | 3.524 | 45.00 | whistle notch | 2 |



*** **DISCLAIMER:** Data on this PDF is subject to change at any time without notice.

WARNING: This product contains Cobalt, a chemical known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov