


7xD



Bright finish



Coolant Through



Reinforced Straight Shank

Speeds & Feeds
information pg 495

Series 6069

RT 150 GG


Carbide, RT 150 GG straight flute high penetration, 7xD, 130° point, reinforced
straight shank, RH cut

Application Materials:



Cast Iron

Cut Dia. = m7 tolerance range, Shank Dia. = h6

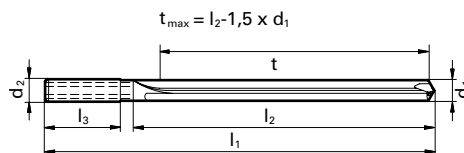

Diameter (d1)				d2 mm	l1 mm	l2 mm	EDP #
Dec. inch	Fract. inch	Wire / letter	mm				
0.1181			3.000	6.000	74.00	36.00	9060690030000
0.1220			3.100	6.000	74.00	36.00	9060690031000
0.1260			3.200	6.000	74.00	36.00	9060690032000
0.1299			3.300	6.000	74.00	36.00	9060690033000
0.1339			3.400	6.000	74.00	36.00	9060690034000
0.1378			3.500	6.000	74.00	36.00	9060690035000
0.1417			3.600	6.000	74.00	36.00	9060690036000
0.1457			3.700	6.000	74.00	36.00	9060690037000
0.1496		25	3.800	6.000	97.00	45.00	9060690038000
0.1535			3.900	6.000	97.00	45.00	9060690039000
0.1575			4.000	6.000	97.00	45.00	9060690040000
0.1614			4.100	6.000	97.00	45.00	9060690041000
0.1654			4.200	6.000	97.00	45.00	9060690042000
0.1693		18	4.300	6.000	97.00	45.00	9060690043000
0.1732			4.400	6.000	97.00	45.00	9060690044000
0.1772		16	4.500	6.000	97.00	45.00	9060690045000
0.1850		13	4.700	6.000	97.00	45.00	9060690047000
0.1890		12	4.800	6.000	97.00	57.00	9060690048000
0.1929			4.900	6.000	97.00	57.00	9060690049000
0.1969			5.000	6.000	97.00	57.00	9060690050000
0.2031		13/64	5.160	6.000	97.00	57.00	9060690051600
0.2165			5.500	6.000	97.00	57.00	9060690055000
0.2362			6.000	6.000	97.00	57.00	9060690060000
0.2500		1/4 E	6.350	8.000	116.00	76.00	9060690063500
0.2559			6.500	8.000	116.00	76.00	9060690065000
0.2677			6.800	8.000	116.00	76.00	9060690068000
0.2756			7.000	8.000	116.00	76.00	9060690070000
0.2811		9/32 K	7.140	8.000	116.00	76.00	9060690071400
0.2953			7.500	8.000	116.00	76.00	9060690075000
0.3071			7.800	8.000	116.00	76.00	9060690078000
0.3126		5/16	7.940	8.000	116.00	76.00	9060690079400
0.3150			8.000	8.000	116.00	76.00	9060690080000
0.3280		21/64	8.330	10.000	139.00	95.00	9060690083300
0.3346			8.500	10.000	139.00	95.00	9060690085000
0.3437		11/32	8.730	10.000	139.00	95.00	9060690087300
0.3543			9.000	10.000	139.00	95.00	9060690090000

Diameter (d1)				d2 mm	l1 mm	l2 mm	EDP #
Dec. inch	Fract. inch	Wire / letter	mm				
0.3594		23/64	9.130	10.000	139.00	95.00	9060690091300
0.3740			9.500	10.000	139.00	95.00	9060690095000
0.3748		3/8	9.520	10.000	139.00	95.00	9060690095200
0.3937			10.000	10.000	139.00	95.00	9060690100000
0.4016			10.200	12.000	163.00	114.00	9060690102000
0.4063		13/32	10.320	12.000	163.00	114.00	9060690103200
0.4134			10.500	12.000	163.00	114.00	9060690105000
0.4220		27/64	10.720	12.000	163.00	114.00	9060690107200
0.4331			11.000	12.000	163.00	114.00	9060690110000
0.4374		7/16	11.110	12.000	163.00	114.00	9060690111100
0.4528			11.500	12.000	163.00	114.00	9060690115000
0.4531		29/64	11.510	12.000	163.00	114.00	9060690115100
0.4724			12.000	12.000	163.00	114.00	9060690120000
0.4843		31/64	12.300	14.000	182.00	133.00	9060690123000
0.4921			12.500	14.000	182.00	133.00	9060690125000
0.5000		1/2	12.700	14.000	182.00	133.00	9060690127000
0.5118			13.000	14.000	182.00	133.00	9060690130000
0.5315			13.500	14.000	182.00	133.00	9060690135000
0.5512			14.000	14.000	182.00	133.00	9060690140000
0.5709			14.500	16.000	204.00	152.00	9060690145000
0.5906			15.000	16.000	204.00	152.00	9060690150000
0.6102			15.500	16.000	204.00	152.00	9060690155000
0.6299			16.000	16.000	204.00	152.00	9060690160000
0.6496			16.500	18.000	223.00	171.00	9060690165000
0.6693			17.000	18.000	223.00	171.00	9060690170000
0.6890			17.500	18.000	223.00	171.00	9060690175000
0.7087			18.000	18.000	223.00	171.00	9060690180000
0.7283			18.500	20.000	244.00	190.00	9060690185000
0.7480			19.000	20.000	244.00	190.00	9060690190000
0.7677			19.500	20.000	244.00	190.00	9060690195000
0.7874			20.000	20.000	244.00	190.00	9060690200000

Alternative Drill Series:

#769 Carbide, RT150GG, 7xD, 120 pt, Bright
 #6070 K20 Carb, RT150GG, 10xD, 130 pt, Bright