

# SPECIFICATION SHEET 264-47002

# SECURE™ ACTIVE ELECTRONIC EAR MUFFS - HEADBAND

- Allows you to communicate with others or hear warning signals while protected against impulsive or intermittent hazardous noise
- Level-dependent microphones mounted on each ear cup ensure excellent directional hearing and spatial awareness
- Ergonomic rubber-coated knob is easy to reach and offers good grip, even when wearing gloves
- Electronic protection system (EPS) limits all sounds reproduced through the speakers to a safe sound level
- External sound input for radio communications as well as MP3 players and other common devices
- Includes features of the Secure<sup>™</sup> Headband such as telescoping size adjustment, slim profile design and snap-in replacement cushions
- Uses low power consuming components... runs on two AA batteries

### **APPLICATIONS**


- · Building and construction
- Manufacturing
- Forestry
- Industrial work
- · Agriculture & farming

#### **TECHNICAL DATA**

MATERIAL	Headband: POM thermoplastic Ear Cups: ABS thermoplastic Ear Cushion: Polyether & PVC-foil Headband cushion: Polyether & lycra Foam liner: Polyether Knobs: ABS thermoplastic & TPE (thermoplastic elastomer) Grummets: TPE (thermoplastic elastomer)				
COLOR	Yellow / ■ Black				
NRR	24 dB				
STYLE	Headband				
SOUND REPRODUCTION	Stereo				
MAX INPUT LEVEL	263 mV on electrical audio input				
SOUND LEVEL LIMIT	82 dB maximum				
AMPLIFICATION	Max. 8 dB (primarily in freq range 500 - 3k Hz - human speech)				
BATTERIES	Two 1.5 V "AA" (minimum 800 hours of use)				
SIZE	Adjustable				
WEIGHT	13.1 oz / 372 g				
PACKAGING	10 per case				
CASE	22" x 8" x 15" / 56cm x 20cm x 38cm				
CASE WEIGHT	15.4 lbs / 7 kg				
C00	China				

# **BARCODES**

ITEM	EACH	DOZEN	CASE		
264-47002	7391441001156		7391441001156		

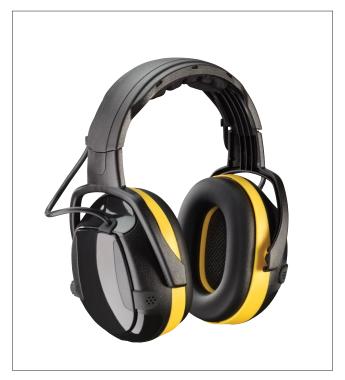

## **EPA / ATTENUATION DATA**

FREQUENCY HZ	125	250	500	1000	2000	3150	4000	6300	8000	NRR	SNR
Mean Attenuation dB	19.9	21.8	27.7	35.4	36.9	39.3	43.1	43.2	42.1	24 dB	30
Standard Deviation dB	4.1	2.5	2.8	4.1	3.9	4.6	4.6	3.1	3.1		30

Tested in accordance with ANSI standard \$3.19-1974

Canada Class A (L)