



PRODUCT, WIRE, CABLE & INDUSTRIAL
IDENTIFICATION

BradyID.com



High-performance
labeling solutions
for the harshest
environments



3" Core Materials - Wire and Cable Labels

B-498 Repositionable Vinyl Cloth

Color: White **Finish:** Semi-Gloss

Repositionable vinyl cloth material for wire, cable and component marking. Adhesive and cloth backing offers excellent holding power, while easily being repositioned and removed.

Performance Attributes: 

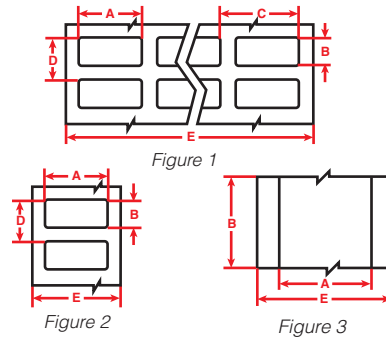


Diagram	Catalog #	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Horiz. Repeat C Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Pkg	Rec. Ribbon
Fig. 2	THT-253-498-3	Vinyl Cloth	White	0.188 (4.78)	3.000 (76.2)	-	-	1.000 (25.4)	1	3000	R6206
Fig. 3	THT-94-498-2	Vinyl Cloth	White	0.240 (6.1)	165 ft (50.8 m)	-	-	1.000 (25.4)	1	1 roll (cont.)	R6206
Fig. 1	THT-90-498-5	Vinyl Cloth	White	0.250 (6.4)	1.437 (36.5)	0.350 (8.9)	1.562 (39.7)	2.200 (55.9)	6	5,000	R6200
Fig. 3	THT-93-498-2	Vinyl Cloth	White	0.312 (7.9)	165 ft (50.8 m)	-	-	1.000 (25.4)	1	1 roll (cont.)	R6206
Fig. 3	THT-92-498-2	Vinyl Cloth	White	0.375 (9.5)	165 ft (50.8 m)	-	-	1.000 (25.4)	1	1 roll (cont.)	R6206
Fig. 1	THT-68-498-10	Vinyl Cloth	White	0.500 (12.7)	0.750 (19.1)	0.600 (15.2)	0.850 (21.6)	2.500 (63.5)	4	10,000	R6202
Fig. 1	THT-87-498-5	Vinyl Cloth	White	0.500 (12.7)	1.437 (36.5)	0.600 (15.2)	1.562 (39.7)	3.700 (94.0)	6	5,000	R6207
Fig. 1	THT-14-498-10	Vinyl Cloth	White	0.650 (16.5)	0.200 (5.1)	0.700 (17.8)	0.300 (7.6)	2.950 (74.9)	4	10,000	R6202
Fig. 2	THT-252-498-3	Vinyl Cloth	White	0.750 (19.1)	0.250 (6.4)	-	-	-	1	3000	R6207
Fig. 1	THT-1-498-10	Vinyl Cloth	White	0.750 (19.1)	0.250 (6.4)	0.800 (20.3)	0.350 (8.9)	3.350 (85.1)	4	10,000	R6207
Fig. 2	THT-254-498-3	Vinyl Cloth	White	0.750 (19.1)	0.750 (19.1)	-	-	-	1	3000	R6207
Fig. 1	THT-91-498-5	Vinyl Cloth	White	0.750 (19.1)	0.937 (23.8)	0.875 (22.2)	1.062 (27.0)	3.500 (88.9)	4	5,000	R6207
Fig. 1	THT-95-498-5	Vinyl Cloth	White	0.800 (20.3)	1.437 (36.5)	0.900 (22.9)	1.562 (39.7)	2.800 (71.1)	3	5,000	R6202
Fig. 1	THT-165-498-5	Vinyl Cloth	White	0.800 (20.3)	1.437 (36.5)	0.900 (22.9)	1.562 (39.7)	3.700 (94.0)	4	5,000	R6207
Fig. 1	THT-5-498-10	Vinyl Cloth	White	1.000 (25.4)	0.500 (12.7)	1.075 (27.3)	0.600 (15.2)	3.350 (85.1)	3	10,000	R6207
Fig. 2	THT-59-498-10	Vinyl Cloth	White	1.000 (25.4)	0.500 (12.7)	-	0.600 (15.2)	1.200 (30.5)	1	10,000	R6206
Fig. 1	THT-88-498-5	Vinyl Cloth	White	1.000 (25.4)	0.750 (19.1)	1.100 (27.9)	0.875 (22.2)	2.300 (58.4)	2	5,000	R6200
Fig. 1	THT-89-498-5	Vinyl Cloth	White	1.000 (25.4)	1.440 (36.5)	1.100 (27.9)	1.562 (39.7)	3.400 (86.4)	3	5,000	R6207
Fig. 2	THT-199-498-3	Vinyl Cloth	White	1.050 (26.7)	0.250 (6.4)	-	0.350 (8.9)	1.250 (31.8)	1	3,000	R6206
Fig. 2	THT-17-498-3	Vinyl Cloth	White	2.000 (50.8)	1.000 (25.4)	-	1.125 (28.6)	2.200 (55.9)	1	3,000	R6200

B-499 Nylon Cloth Material

Color: White **Finish:** Matte

Permanent adhesive allows labeling in environments with heat, cold, oil and dirt. Ideal for wire and cable marking, electronic component marking, laboratory vials and general labeling.

Performance Attributes: 

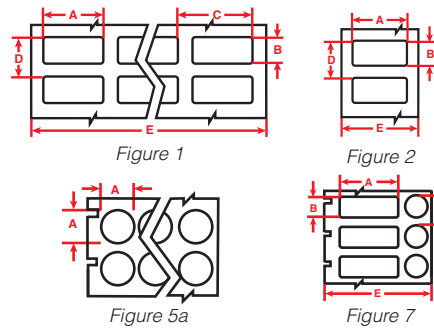


Diagram	Catalog #	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Horiz. Repeat C Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Pkg	Rec. Ribbon
Fig. 5a	THT-143-499-3	Nylon Cloth	White	0.375 (9.53) dia.	-	-	-	-	4	3000	R4900
Fig. 5a	THT-144-499-3	Nylon Cloth	White	0.500 (12.7) dia.	-	-	-	-	3	3000	R4900
Fig. 1	THT-68-499-10	Nylon Cloth	White	0.500 (12.7)	0.750 (19.1)	0.600 (15.2)	0.850 (21.6)	2.500 (63.5)	4	10,000	R4900
Fig. 1	THT-162-499-10	Nylon Cloth	White	0.800 (20.3)	1.437 (36.5)	0.900 (22.9)	1.562 (39.7)	3.700 (94.0)	4	10,000	R4904
Fig. 1	THT-165-499-5	Nylon Cloth	White	0.800 (20.3)	1.437 (36.5)	0.900 (22.9)	1.562 (39.7)	3.700 (94.0)	4	5,000	R4904
Fig. 1	THT-69-499-3	Nylon Cloth	White	0.800 (20.3)	1.437 (36.5)	0.900 (22.9)	1.540 (39.1)	1.900 (48.3)	2	3,000	R4902
Fig. 7	THT-126-499-3	Nylon Cloth	White	0.900 (22.86)	0.500 (12.7)	-	-	-	1	3000	R4900
Fig. 2	THT-125-499-3	Nylon Cloth	White	0.900 (22.9)	0.500 (12.7)	-	0.600 (15.2)	1.100 (27.9)	1	3,000	R4902
Fig. 7	THT-163-499-3	Nylon Cloth	White	1.000 (25.4)	0.375 (9.5)	-	-	-	1	3000	R4900
Fig. 1	THT-152-499-3	Nylon Cloth	White	1.000 (25.4)	0.375 (9.5)	1.075 (27.3)	0.475 (12.1)	2.300 (58.4)	2	3,000	R4902
Fig. 2	THT-136-499-3	Nylon Cloth	White	1.500 (38.1)	0.750 (19.1)	-	0.875 (22.2)	1.700 (43.2)	1	3,000	R4902
Fig. 2	THT-185-499-3	Nylon Cloth	White	1.750 (44.5)	1.000 (25.4)	-	1.125 (28.6)	1.950 (49.5)	1	3,000	R4902
Fig. 2	THT-186-499-3	Nylon Cloth	White	1.750 (44.5)	1.875 (47.6)	-	1.975 (50.2)	1.950 (49.5)	1	3,000	R4902
Fig. 2	THT-137-499-3	Nylon Cloth	White	2.000 (50.8)	1.000 (25.4)	-	1.125 (28.6)	2.200 (55.9)	1	3,000	R4902
Fig. 2	THT-151-499-3	Nylon Cloth	White	2.000 (50.8)	0.250 (6.4)	-	0.350 (8.9)	2.200 (55.9)	1	3,000	R4902
Fig. 2	THT-19-499-1	Nylon Cloth	White	3.000 (76.2)	2.000 (50.8)	-	2.125 (54.0)	3.200 (81.3)	1	1,000	R4900

3" Core Materials - Wire and Cable Labels

B-412 Polypropylene Tags

Color: White **Finish:** Matte

Thick polypropylene material used for wire, cable and inventory identification. Offers high print legibility and high tensile strength.




Figure 13




Figure 16



Diagram	Catalog #	Material	Finish	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Pkg	Rec. Ribbon
Fig. 16	THT-150-412-1	Polypropylene Tag	Matte	White	1.938 (49.2)	0.375 (9.5)	-	1	1,000	R6200
Fig. 13	THT-33-412-1	Polypropylene Tag	Matte	White	3.000 (76.2)	6.000 (152.4)	3.000 (76.2)	1	2 rolls of 500	R6202

B-508 Nomex® Wire and Cable Tags

Thermal transfer and dot matrix printable wire and cable bundle tag for harsh environments. Excellent tear, heat and solvent resistance. Meets the following industry specifications: SAE AS 81531, RoHS compliant. Tested per ASTM E162, ASTM E662.




Figure 61



Note: The parts below are compatible with the i7100 and PR Plus printers only.

Diagram	Catalog #	Material	Finish	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Pkg	Rec. Ribbon	Rec. Printer
Fig. 61	HSNX-400-2-WT	Nomex® Tag	Matte	White	2.200 (55.8)	0.410 (10.4)	0.622 (15.79)	3.250 (82.55)	2,500	R4300	PR+300
Fig. 61	HSNX-400-2-WT-S	Nomex® Tag	Matte	White	2.200 (55.8)	0.410 (10.4)	0.622 (15.79)	3.250 (82.55)	250	R4300	PR+300
Fig. 61	HSNX-800-2-WT	Nomex® Tag	Matte	White	2.00 (50.8)	0.800 (10.160)	1.012 (25.70)	3.250 (82.55)	2,500	R4300	PR+300
Fig. 61	HSNX-800-2-WT-S	Nomex® Tag	Matte	White	2.00 (50.8)	0.800 (10.160)	1.012 (25.70)	3.250 (82.55)	250	R4300	PR+300
Fig. 61	HSNX-400-2-YL	Nomex® Tag	Matte	Yellow	2.200 (55.8)	0.410 (10.4)	0.622 (15.79)	3.250 (82.55)	2,500	R4300	PR+300
Fig. 61	HSNX-400-2-YL-S	Nomex® Tag	Matte	Yellow	2.200 (55.8)	0.410 (10.4)	0.622 (15.79)	3.250 (82.55)	250	R4300	PR+300
Fig. 61	HSNX-800-2-YL	Nomex® Tag	Matte	Yellow	2.00 (50.8)	0.800 (10.160)	1.012 (25.70)	3.250 (82.55)	2,500	R4300	PR+300
Fig. 61	HSNX-800-2-YL-S	Nomex® Tag	Matte	Yellow	2.00 (50.8)	0.800 (10.160)	1.012 (25.70)	3.250 (82.55)	250	R4300	PR+300

Nomex® is a registered trademark of DuPont.

B-7643 Heatex™ Cable Markers

Polyurethane tag material for dot matrix and thermal transfer printing. Low-halogen material that is RoHS compliant.




Figure 61



Note: The parts below are compatible with the i7100 and PR Plus printers only.

Diagram	Catalog #	Material	Finish	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Pkg	Rec. Ribbon
Fig. 61	HSCM-2400-0.390-WT	Polyurethane	Matte	White	2.362 (60.0)	0.394 (10.0)	1	1,000	R6002
Fig. 61	HSCM-3000-0.500-WT	Polyurethane	Matte	White	2.953 (75.0)	0.394 (10.0)	1	1,000	R6002
Fig. 61	HSCM-3000-0.625-WT	Polyurethane	Matte	White	2.953 (75.0)	0.591 (15.0)	1	1,000	R6002
Fig. 61	HSCM-3000-1-WT	Polyurethane	Matte	White	2.953 (75.0)	0.984 (25.0)	1	500	R6002
Fig. 61	HSCM-2400-0.390-YL	Polyurethane	Matte	Yellow	2.400 (61.0)	0.390 (9.0)	1	1,000	R6002
Fig. 61	HSCM-3000-0.625-YL	Polyurethane	Matte	Yellow	2.953 (75.0)	0.591 (15.0)	1	1,000	R6002
Fig. 61	HSCM-3000-1-YL	Polyurethane	Matte	Yellow	2.953 (75.0)	0.984 (25.0)	1	500	R6002

B-390 DuraSleeve® Polypropylene Inserts

Printable, rigid inserts designed to be printed and affixed to a wire using extruded, clear PVC Wire Marking Carriers. Inserts are supplied roll-form formatted for thermal transfer printing.

DuraSleeve Printable Inserts




Figure 17

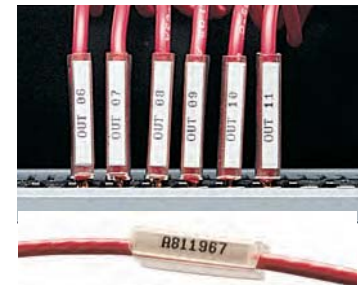


Diagram	Catalog #	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Pkg	Rec. Printer	Rec. Ribbon
Fig. 17	DSTHT-15-390-2.5	Polypropylene	White	0.591 (15.01)	0.163 (4.1)	2500	i7100, PR+	R6200
Fig. 17	DSTHT-30-390-2.5	Polypropylene	White	1.181 (30.0)	0.163 (4.1)	2500	i7100, PR+	R6200

0.590" Width Clear Carriers

Catalog #	Carrier Width Inch (mm)	Wire Outside Diameter Inch (mm)	Approx. Wire Gauge	Qty Per Pkg
DMC-1.3/3-15	0.590 (14.98)	0.051 (1.30) to 0.118 (3.00)	20-12	2000
DMC-2.5/5-15	0.590 (14.98)	0.098 (2.50) to 0.197 (5.00)	16-10	3000
DMC-4/10-15	0.590 (14.98)	0.157 (4.00) to 0.393 (10.00)	10-4	4000
DMC-8/16-15	0.590 (14.98)	0.315 (8.00) to 0.630 (16.00)	6-250	7500

1.180" Width Clear Carriers

Catalog #	Carrier Width Inch (mm)	Wire Outside Diameter Inch (mm)	Approx. Wire Gauge	Qty Per Pkg
DMC-1.3/3-30	1.180 (29.97)	0.051 (1.30) to 0.118 (3.00)	20-12	500
DMC-2.5/5-30	1.180 (29.97)	0.098 (2.50) to 0.197 (5.00)	16-10	100
DMC-4/10-30	1.180 (29.97)	0.157 (4.00) to 0.393 (10.00)	10-4	200
DMC-8/16-30	1.180 (29.97)	0.315 (8.00) to 0.630 (16.00)	6-250	250

Labels By Size Index page 300
Print Ribbons page 146
Material Guide page 264