


# MINI ARCHITECTURAL BASEBOARD

ALUMINUM - AALUX2 SERIES



## STYLE AND DURABILITY AT YOUR FEET

Here is a mini architectural baseboard you will not soon forget: the AALUX2 from the ALUX™ series, designed to be installed below large windows, patio doors or bay windows. In addition to not cluttering the room, it controls cold air infiltration and condensation due to its ability to act as a hot air curtain. Its unique style and aluminum extrusion not only make it durable but also ensures it complements any room.

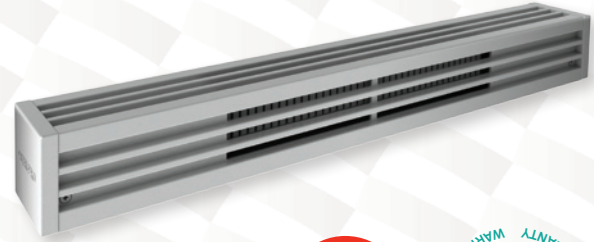

**EXTRUDED ALUMINUM FRONT COVER  
WITH A UNIQUE AND LUXURIOUS DESIGN**

**EXTREMELY SOLID, IMPACT AND RUST RESISTANT**

**NEW STYLISH WHITE SATIN FINISH**

**NO CONDENSATION BUILD-UP**

ELIMINATES ANY CONDENSATION BUILD-UP

**BLANK SECTIONS AVAILABLE**

FOR A CONTINUOUS EFFECT

### IDEAL FOR:

BELOW LARGE WINDOWS, PATIO DOORS OR BAY  
WINDOWS, OFFICES, SOLARIUMS

### COLORS

- standard: white, soft white
- luxurious finish: anodized aluminum (see price list)
- ORORA (optional): denim blue, midnight blue, turquoise, moss green, canary yellow, red, orange, anodized aluminum paint, gravel gray, charcoal, espresso, almond, black (refer to [www.stelpro.com/en-US/orora](http://www.stelpro.com/en-US/orora))

### FINISH

epoxy-polyester powdercoat or clear anodized finish

### MANUFACTURING

- 3 in. x 3 in. compact profile
- solid 20-gauge steel cabinet
- extremely resistant extruded aluminum front cover with a thickness equivalent to 10 gauge
- thermal protection with automatic reset
- full-length wireway
- pencil-proof openings less than 1/4 in. prevent foreign objects from entering the unit

### ELEMENT

single tubular, stainless steel sheathed element with boxed aluminum fins for improved heat dissipation; the element is securely fastened at its center, floating in nylon sleeves at each end, eliminating expansion and contraction noises

### CONTROL

- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended
- built-in thermostat accessible without removing front grille, installed in the left junction box only (optional)
- low voltage relay kit installed in the left junction box only (optional)

### INSTALLATION

- surface mounted
- wall or floor mounted with pedestal kit (optional)
- wiring compartment at both ends of unit
- for a continuous effect, custom blank sections with a simple attach system are available (optional)

## ACCESSORIES

PRODUCT	DESCRIPTION
ALUX2T12*	built-in tamper-proof single pole thermostat
ALUX2RE153*	built-in electronic low voltage relay [15 A @ 120 V-347 V]
ALUX2RE156*	built-in electronic low voltage relay [6 A @ 600 V]
ALUX2RE153T*	built-in electronic low voltage relay c/w transformer 24 V [15 A @ 208 V-347 V]
ALUX2DIS250*	disconnect switch [120 V-250 V] [17 A @ 120 V-12 A @ 250 V]
ALUX2DIS600*	disconnect switch [277 V-600 V]
PK5*	pedestal kit - single (kit of two)
PK5CAP	anodized aluminum (paint) pedestal kit - single (kit of two)
PK5D*	pedestal kit - double (kit of two)
PK5DCAP	anodized aluminum (paint) pedestal kit - double (kit of two)
ALUX2JS*	joiner strip (2 in.)
ALUX2JSCAP	anodized aluminum (paint) joiner strip (2 in.)
ALUX2IC90*	inside corner (back measures 6 1/2 in. long on each side)
ALUX2IC90CA	anodized aluminum (finish) inside corner (back measures 6 1/2 in. long on each side)
ALUX2OC90*	outside corner (back measures 6 1/2 in. long on each side)
ALUX2OC90CA	anodized aluminum (finish) outside corner (back measures 6 1/2 in. long on each side)
ALUX2CB**	clean back (fully finished, no mounting holes or knockouts)
ALUX2SA*	full width flush fit stand - height of 2 to 12 in.
ALUX2SR*	full width recessed stand (39/64 in.) - height of 2 in.

Electronic relays can receive a PWM (pulsed width modulation) or digital (on/off) signal

\* Add W for white or SW for soft white


\* Factory installed

# TECHNICAL SPECIFICATIONS

COMMERCIAL USE 150 W PER LINEAR FOOT			RESIDENTIAL USE 100 W PER LINEAR FOOT			VOLTAGE	LENGTH	WEIGHT
CODE	WATTS	BTU/H	CODE	WATTS	BTU/H	VOLTS	IN.	LB
AALUX206031	300	1024	---	---	---	120	23 5/8	5.2
AALUX206038	300	1024	---	---	---	208	23 5/8	5.2
AALUX206032	300	1024	---	---	---	240	23 5/8	5.2
AALUX209041	450	1536	AALUX209031	300	1024	120	35 7/16	7.8
AALUX209048	450	1536	AALUX209038	300	1024	208	35 7/16	7.8
AALUX209042	450	1536	AALUX209032	300/225	1024	240	35 7/16	7.8
AALUX209047	450	1536	AALUX209037	300	1024	277	35 7/16	7.8
AALUX212061	600	2048	AALUX212041	400	1365	120	47 1/4	10.4
AALUX212068	600	2048	AALUX212048	400	1365	208	47 1/4	10.4
AALUX212062	600	2048	AALUX212042	400/300	1365	240	47 1/4	10.4
AALUX212067	600	2048	AALUX212047	400	1365	277	47 1/4	10.4
AALUX215071	750	2560	AALUX215051	500	1706	120	59 1/16	13
AALUX215078	750	2560	AALUX215058	500	1706	208	59 1/16	13
AALUX215072	750	2560	AALUX215052	500/375	1706	240	59 1/16	13
AALUX215077	750	2560	AALUX215057	500	1706	277	59 1/16	13
AALUX215075	750	2560	AALUX215055	500	1706	480	59 1/16	13
AALUX218091	900	3071	AALUX218061	600	2047	120	70 7/8	15.5
AALUX218098	900	3071	AALUX218068	600	2047	208	70 7/8	15.5
AALUX218092	900	3071	AALUX218062	600/450	2047	240	70 7/8	15.5
AALUX218097	900	3071	AALUX218067	600	2047	277	70 7/8	15.5
AALUX218095	900	3071	AALUX218065	600	2047	480	70 7/8	15.5
AALUX221101	1050	3583	AALUX221071	700	2388	120	82 11/16	18.1
AALUX221108	1050	3583	AALUX221078	700	2388	208	82 11/16	18.1
AALUX221102	1050	3583	AALUX221072	700/525	2388	240	82 11/16	18.1
AALUX221107	1050	3583	AALUX221077	700	2388	277	82 11/16	18.1
AALUX221105	1050	3583	AALUX221075	700	2388	480	82 11/16	18.1
AALUX224121	1200	4095	AALUX224081	800	2730	120	94 1/2	20.7
AALUX224128	1200	4095	AALUX224088	800	2730	208	94 1/2	20.7
AALUX224122	1200	4095	AALUX224082	800/600	2730	240	94 1/2	20.7
AALUX224127	1200	4095	AALUX224087	800	2730	277	94 1/2	20.7
AALUX224125	1200	4095	AALUX224085	800	2730	480	94 1/2	20.7
AALUX227138	1350	4607	AALUX227098	900	3071	208	106 5/16	23.3
AALUX227132	1350	4607	AALUX227092	900/675	3071	240	106 5/16	23.3
AALUX227137	1350	4607	AALUX227097	900	3071	277	106 5/16	23.3
AALUX227135	1350	4607	AALUX227095	900	3071	480	106 5/16	23.3

Add W for white, SW for soft white or CA for anodized aluminum (finish) (see [www.stelpro.com/en-US/orora](http://www.stelpro.com/en-US/orora) for optional colors and contact your °STELPRO representative for more information)  
 --- not available

## TECHNICAL DRAWINGS

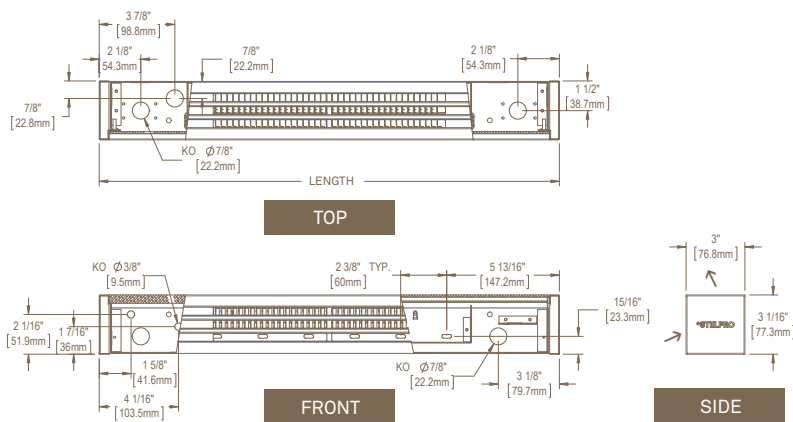

FC-AALUX2\_NOPRIOE\_0317