



Jergens®

 WORLD HEADQUARTERS

15700 S. WATERLOO ROAD
CLEVELAND, OH 44110-3898
877.440.LIFT (5348)
JERGENSINC.COM
LIFTING@JERGENSINC.COM

DISTRIBUTED BY:



WORKHOLDING SOLUTIONS



SPECIALTY FASTENERS



LIFTING SOLUTIONS

©2023 JERGENS, INC. | JERG0123




WORKHOLDING SOLUTIONS | SPECIALTY FASTENERS | LIFTING SOLUTIONS
©2023 JERGENS, INC.

Jergens®

DIE FLIPPING HOIST RINGS

FLIP THE SCRIPT ON LIFTING

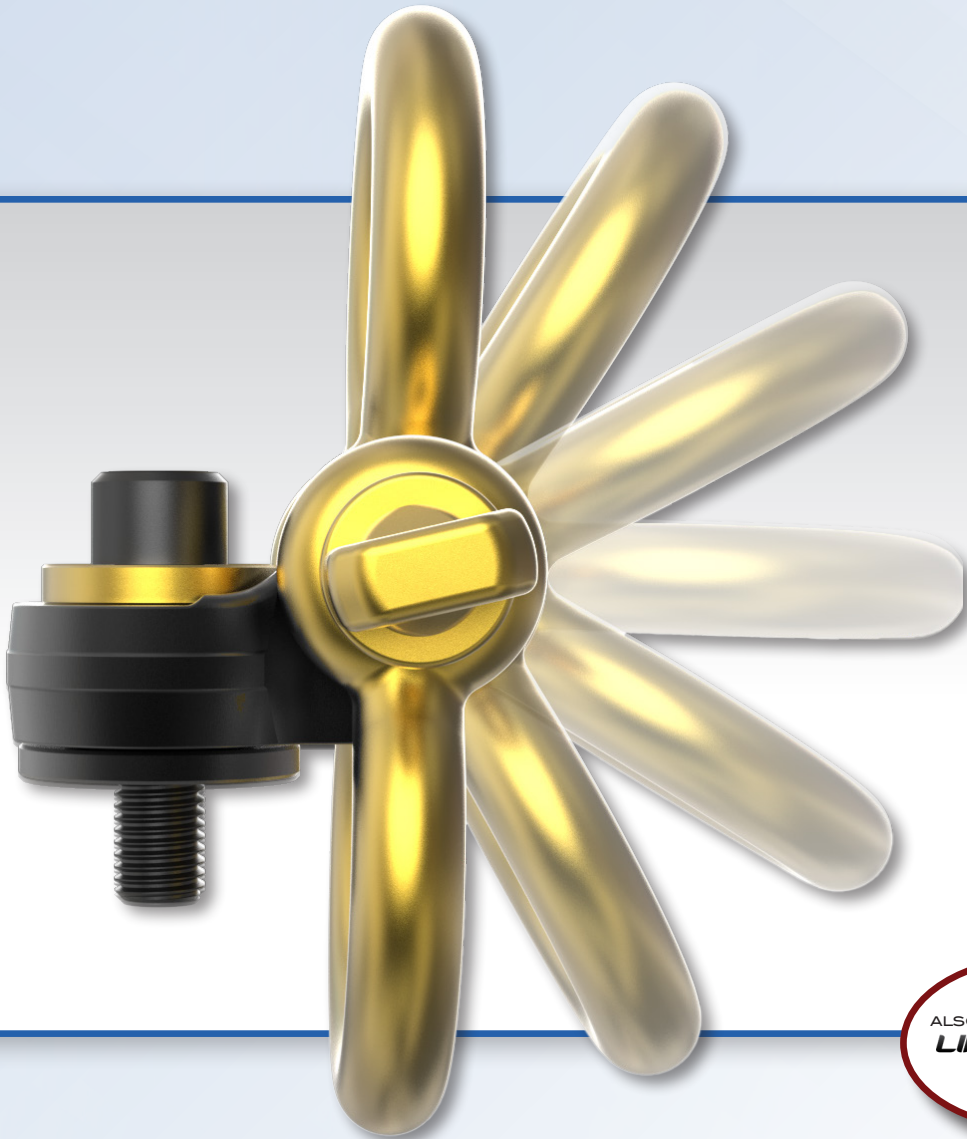

ALSO AVAILABLE IN
LIFT-CHECK

Jergens®

15700 S. WATERLOO ROAD, CLEVELAND, OH 44110-3898
877.440.LIFT (5348) | JERGENSINC.COM | LIFTING@JERGENSINC.COM





DIE-FLIPPING HOIST RINGS

Building on the popularity of our SP2000™ and combining the shackle feature of our Shackle-Lok™ style hoist ring, the Die-Flipping hoist ring is the latest solution for your flipping needs. With it's offset neck, it will help to clear die shoes, external plumbing, etc, to allow the unit to rotate and pivot as needed. It is free to swivel around the center bolt, allowing greater clearances in side lifting applications where lifting and rotating of the objects is needed. Also available with Jergens' patented proprietary hex head Lift-Check™ bolt.

- **Material:** Alloy Steel
 - **Body Finish:** Black Oxide
 - **Shackle Finish:** Zinc Plated with gold colored conversion coating
 - **Shackle Type:** IV A, Grade A, Class 2
 - **Standard:** 400°F (204°C) to -20°F (-28°C)
 - **Lift Check™:** 168°F (75°C) to -4°F (-20°C)
- CE Certified
 - Magnetic Particle Inspected
 - Conforms to ASME B30.26 and MIL-STD-209
 - 3D Models Available in Multiple Formats from www.jergensinc.com

5:1
STRENGTH
FACTOR


360°
SWIVEL
180°
PIVOT

PROOF
TESTED
200%


PROOF
TEST
CERTIFICATE
PROVIDED

MADE
IN THE
USA

STANDARD DIE-FLIPPING HOIST RINGS

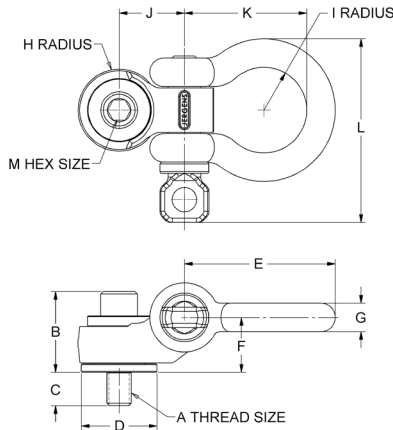

LIFT-CHECK™ DIE-FLIPPING HOIST RINGS

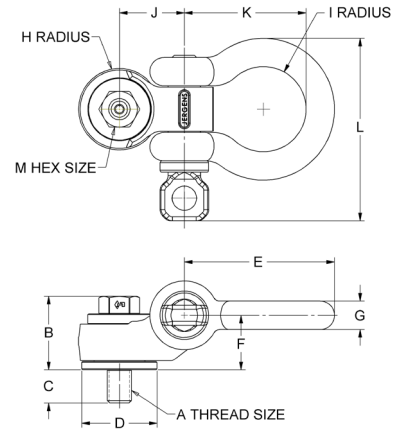

STANDARD DIE-FLIPPING HOIST RINGS

INCH

Part Number	Load Capacity (lbs)	Thread Size A	B (in)	C (in)	D (in)	E (in)	F (in)	G (in)	H (in)	I (in)	J (in)	K (in)	L (in)	Hex Size M	Torque (ft lbf)	Wt. (lbs)
47913	1,650	1/2-13	1 3/4	3/4	1.50	2 3/4	1 5/32	1/2	57/64	3/4	1 23/64	2 1/4	2 31/32	3/8	28	1.6
47914	2,500	5/8-11	1 7/8	1	1.50	2 3/4	1 5/32	1/2	57/64	3/4	1 23/64	2 1/4	2 31/32	1/2	60	1.7
47915	4,100	3/4-10	2 15/32	1	2.32	4 5/8	1 43/64	7/8	1 9/32	1 5/16	2	3 3/4	5 5/8	5/8	100	6.7
47916	7,100	1-8	2 23/32	1 1/2	2.32	4 5/8	1 43/64	7/8	1 9/32	1 5/16	2	3 3/4	5 5/8	3/4	230	7.2
47917	12,000	1 1/4-7	3 3/8	1 7/8	3.19	5 5/16	2 3/16	1	1 47/64	1 3/8	2 49/64	4 5/16	6 1/8	7/8	470	13.1
47918	16,700	1 1/2-6	3 5/8	2 3/8	3.19	5 5/16	2 3/16	1	1 47/64	1 3/8	2 49/64	4 5/16	6 1/8	1	800	14.2

METRIC

Part Number	Load Capacity (kg)	Thread Size A	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	J (mm)	K (mm)	L (mm)	Hex Size M	Torque (Nm)	Wt. (kg)
47921	650	M12	43.5	19	38	70	29	12.7	22.6	19	34.5	57	75	10	37	0.7
47922	1,200	M16	47.5	29	38	70	29	12.7	22.6	19	34.5	57	75	14	80	0.8
47923	2,100	M20	64	31	59	117.4	42.5	22.2	32.5	33.3	51	95	143	17	135	3.1
47924	2,950	M24	68	36	59	117.4	42.5	22.2	32.5	33.3	51	95	143	19	305	3.2
47925	4,850	M30	84	46	81	135	55.5	25.4	44	35	70	110	155	22	590	5.8
47926	6,700	M36	90	56	81	135	55.5	25.4	44	35	70	110	155	27	960	6.2

LIFT-CHECK™ DIE-FLIPPING HOIST RINGS

INCH

Part Number	Load Capacity (lbs)	Thread Size A	B (in)	C (in)	D (in)	E (in)	F (in)	G (in)	H (in)	I (in)	J (in)	K (in)	L (in)	Hex Size M	Torque (ft lbf)	Wt. (lbs)
47913LC	1,650	1/2-13	1 5/8	3/4	1.50	2 3/4	1 5/32	1/2	57/64	3/4	1 23/64	2 1/4	2 31/32	3/4	28	1.6
47914LC	2,500	5/8-11	1 23/32	1	1.50	2 3/4	1 5/32	1/2	57/64	3/4	1 23/64	2 1/4	2 31/32	15/16	60	1.7
47915LC	4,100	3/4-10	2 17/64	1	2.32	4 5/8	1 43/64	7/8	1 9/32	1 5/16	2	3 3/4	5 5/8	1 1/8	100	6.7
47916LC	7,100	1-8	2 1/2	1 1/2	2.32	4 5/8	1 43/64	7/8	1 9/32	1 5/16	2	3 3/4	5 5/8	1 1/2	230	7.2
47917LC	12,000	1 1/4-7	3 5/64	1 7/8	3.19	5 5/16	2 3/16	1	1 47/64	1 3/8	2 49/64	4 5/16	6 1/8	1 7/8	470	13
47918LC	16,700	1 1/2-6	3 3/16	2 3/8	3.19	5 5/16	2 3/16	1	1 47/64	1 3/8	2 49/64	4 5/16	6 1/8	2 1/4	800	14

METRIC

Part Number	Load Capacity (kg)	Thread Size A	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	J (mm)	K (mm)	L (mm)	Hex Size M	Torque (Nm)	Wt. (kg)
47921LC	650	M12	39.3	19	38	70	29.4	12.7	22.6	19	34.5	57	75	18	37	0.73
47922LC	1,200	M16	41.8	29	38	70	29.4	12.7	22.6	19	34.5	57	75	24	80	0.77
47923LC	2,100	M20	57	31	59	117.4	42.5	22.2	32.5	33.3	51	95	143	30	135	3.1
47924LC	2,950	M24	59	36	59	117.4	42.5	22.2	32.5	33.3	51	95	143	36	305	3.17
47925LC	4,850	M30	73	46	81	135	55.5	25.4	44	35	70	110	155	46	590	5.77
47926LC	6,700	M36	77	56	81	135	55.5	25.4	44	35	70	110	155	55	960	6.17