

## HOSE HALTERS™

**Help protect your workers from injury and your equipment from damage**

To reduce damage to equipment and injury to personnel when hoses accidentally disconnect while under pressure be sure to use the new Lift-All **Hose Halters™**. Suitable for use on pneumatic, water and hydraulic hoses, these easy to install straps are made from strong, flexible nylon webbing. The available standard lengths will accommodate hoses with inside diameters from 1/4" up to 6". Meets OSHA, MSHA and Canada OHS requirements for restraining devices on hose connections.

**Available in One or Two Ply Construction**




Maximum Hose I.D. (in.)	Max. Internal Pressure (PSI)	
	1 Ply (HH1)	2 Ply (HH2)
1/4	26,000	52,000
1/2	6,500	13,000
3/4	2,900	5,800
1	1,650	3,300
2	400	750
3	175	350
4	100	200
6	NA	90


Part #	Length (L)	Hose I.D.
One Ply		
HH130	30"	1/4" - 2"
HH140	40"	1" - 4"
Two Ply		
HH230	30"	1/4" - 2"
HH244	44"	1" - 4"
HH264	64"	2" - 6"



One Ply

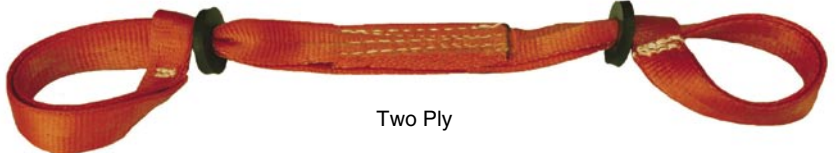

Two Ply

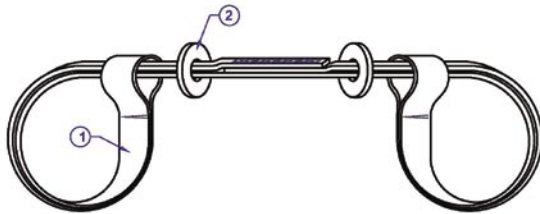

Made from strong, flexible nylon webbing (1). Slide the rubber grommets (2) to keep choked eyes snug on the hose.



**OSHA 1926.603(a)(10) states:**  
 Safety chains, or equivalent means, shall be provided for each hose connection to prevent the line from thrashing around in case the coupling becomes disconnected.

Specials