




RUNOUT COOLANT BALANCE

COOLANT PORT OPTION

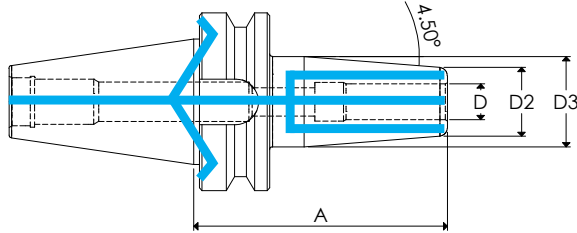

STANDARD TYPE




Part Number	D	A	D2	D3
BT40-SF0250-3.54CP	1/4"	3.54"	0.79"	1.06"
BT40-SF0375-3.54CP	3/8"	3.54"	0.94"	1.26"
BT40-SF0500-3.54CP	1/2"	3.54"	0.94"	1.26"
BT40-SF0625-3.54CP	5/8"	3.54"	1.06"	1.34"
BT40-SF0750-3.54CP	3/4"	3.54"	1.30"	1.65"
BT40-SF1000-3.94CP	1"	3.94"	1.73"	2.09"

Part Number	D	A	D2	D3
BT40-SF8-90CP	8mm	90	20	27
BT40-SF10-90CP	10mm	90	24	32
BT40-SF12-90CP	12mm	90	24	32
BT40-SF16-100CP	16mm	100	27	34
BT40-SF20-100CP	20mm	100	33	42
BT40-SF25-100CP	25mm	100	44	53

INCH

METRIC

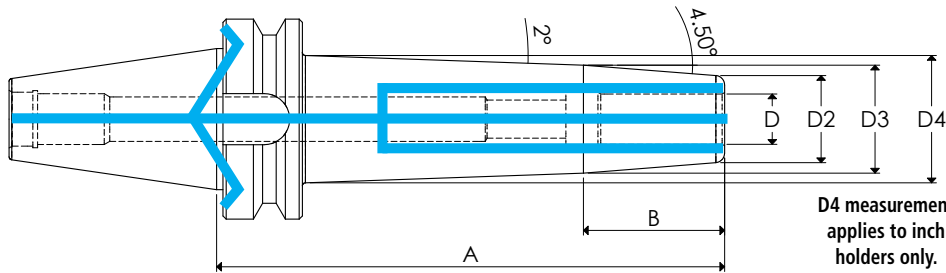

EXTENDED TYPE



D4 measurement applies to inch holders only.

Part Number	D	A	D2	D3	D4	B
BT40-SF0250-6.30CP	1/4"	6.30"	0.79"	1.06"	1.32"	1.50"
BT40-SF0375-6.30CP	3/8"	6.30"	0.94"	1.26"	1.49"	2.00"
BT40-SF0500-6.30CP	1/2"	6.30"	0.94"	1.26"	1.49"	2.00"
BT40-SF0625-6.30CP	5/8"	6.30"	1.06"	1.34"	1.58"	1.75"
BT40-SF0750-6.30CP	3/4"	6.30"	1.30"	1.65"	1.86"	2.25"
BT40-SF1000-6.30CP	1"	6.30"	1.73"	2.09"	2.30"	2.25"

Part Number	D	A	D2	D3	B
BT40-SF8-160CP	8mm	160	20	27	38.12
BT40-SF10-160CP	10mm	160	24	32	50.83
BT40-SF12-160CP	12mm	160	24	32	50.83
BT40-SF16-160CP	16mm	160	27	34	44.47
BT40-SF20-160CP	20mm	160	33	42	57.18
BT40-SF25-160CP	25mm	160	44	53	57.18