


Standard: JIS B 6339 Form B (Plugged)
 Material: H11 High Alloy Steel
 Hardness: 52 HRC tempered
 Runout: .000040" to .00012" at 3 X Diameter of Tool
 Balancing: <3g.mm at 20,000 RPM (BT40)
 <10g.mm at 15,000 RPM (BT50)
 Cooling: Center-thru and Flange Thru Coolant (plugged)
 Face Coolant (BT40 Standard and Extended only)

Features: All shrink fit holders 6 mm (1/4") and above include a backup screw.
 Application: Compatible with h6 tolerance Steel, HSS, Carbide
 Accessories: **Compatible with Part# RE011 shrink fit reductions and shrink fit extensions (see pages 36-37). Replacement Backup Screw (see page 37).**



STANDARD TYPE

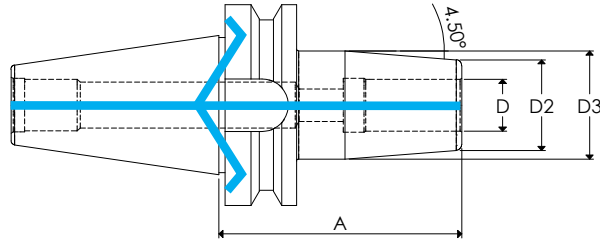

INCH


Part Number	D	A	D2	D3
BT50-SF0125-3.94*	1/8"	3.94"	0.39"	0.71"
BT50-SF0250-3.94*	1/4"	3.94"	0.79"	1.06"
BT50-SF0375-3.94*	3/8"	3.94"	0.94"	1.26"
BT50-SF0500-3.94*	1/2"	3.94"	0.94"	1.26"
BT50-SF0625-3.94*	5/8"	3.94"	1.06"	1.34"
BT50-SF0750-3.94*	3/4"	3.94"	1.30"	1.65"
BT50-SF1000-3.94*	1"	3.94"	1.73"	2.09"
BT50-SF1250-3.94*	1.1/4"	3.94"	1.73"	2.09"

METRIC

Part Number	D	A	D2	D3
BT50-SF6-100	6mm	100	20	27
BT50-SF8-100	8mm	100	20	27
BT50-SF10-100	10mm	100	24	32
BT50-SF12-100	12mm	100	24	32
BT50-SF16-100	16mm	100	27	34
BT50-SF20-100	20mm	100	33	42
BT50-SF25-100	25mm	100	44	53
BT50-SF32-100	32mm	100	44	53

***Pricing on Request**

EXTENDED TYPE

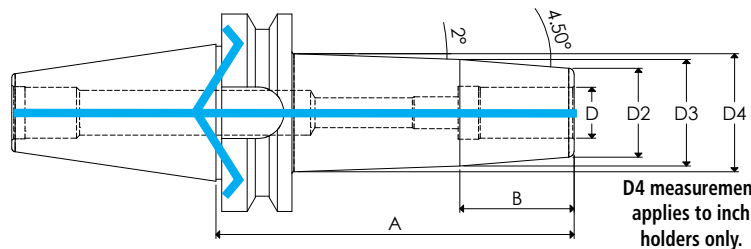

D4 measurement applies to inch holders only.

INCH

Part Number	D	A	D2	D3	D4	B
BT50-SF0125-6.30*	1/8"	6.30"	0.39"	0.71"	0.90"	2.00"
BT50-SF0250-6.30*	1/4"	6.30"	0.79"	1.06"	1.32"	1.50"
BT50-SF0375-6.30*	3/8"	6.30"	0.94"	1.26"	1.32"	1.50"
BT50-SF0500-6.30*	1/2"	6.30"	0.94"	1.26"	1.49"	2.00"
BT50-SF0625-6.30*	5/8"	6.30"	1.06"	1.34"	1.49"	2.00"
BT50-SF0750-6.30*	3/4"	6.30"	1.30"	1.65"	1.78"	1.75"
BT50-SF1000-6.30*	1"	6.30"	1.73"	2.09"	2.29"	2.25"
BT50-SF1250-6.30*	1.1/4"	6.30"	1.73"	2.09"	2.30"	2.25"

METRIC

Part Number	D	A	D2	D3	B
BT50-SF6-160	6mm	160	20	27	38.12
BT50-SF8-160	8mm	160	20	27	38.12
BT50-SF10-160	10mm	160	24	32	50.83
BT50-SF12-160	12mm	160	24	32	50.83
BT50-SF16-160	16mm	160	27	34	44.47
BT50-SF20-160	20mm	160	33	42	57.18
BT50-SF25-160	25mm	160	44	53	57.18
BT50-SF32-160	32mm	160	44	53	57.18

***Pricing on Request**