

CAT End Mill Holders

- End mill inner bore T.I.R. ≤ 0.0002
- Through-spindle coolant capability
- AT3 or better taper
- Available in high-speed balanceable versions



TIR: < .0002 run out in ID bore



Milling
★★★★☆



Speed: up to 20,000 rpm



Tapping
★★★★☆



Set-up: quick and easy




Coolant-thru: jet slots (optional)


Please note that the maximum RPM listed in our catalog may vary depending on the toolholder shank, weight, balanceability and the G rating.

CAT 40 - Inch


Part Number	Style	d	L	L1	L2	D	D1	Set Screw Part Number
C40S6-0125-1.38	Stubby	1/8"	1.38"	0.74"	-	0.75"	-	S6-32X1/4
C4006-0125-2.36	Standard	1/8"	2.36"	0.63"	-	0.75"	-	S6-32X1/4
C4016-0125-4.00	Standard	1/8"	4.00"	0.63"	-	0.75"	-	S6-32X1/4
C40S6-0187-1.38	Stubby	3/16"	1.38"	0.94"	-	0.75"	-	S8-32X1/4
C4006-0187-2.50	Standard	3/16"	2.50"	0.86"	-	0.75"	-	S8-32X1/4
C4016-0187-4.00	Standard	3/16"	4.00"	0.86"	-	0.75"	-	S8-32X1/4
C40S6-0250-1.38	Stubby	1/4"	1.38"	1.18"	-	0.79"	-	S1/4-28X1/4
C4006-0250-2.50	Standard	1/4"	2.50"	1.10"	-	0.79"	-	S1/4-28X1/4
C4016-0250-4.00	Standard	1/4"	4.00"	1.10"	-	0.79"	-	S1/4-28X1/4
C4046-0250-9.00	Ext. Length	1/4"	9.00"	1.5"	6.12"	0.79"	1.75"	S1/4-28X1/4
C40S6-0312-1.38	Stubby	5/16"	1.38"	1.34"	-	0.87"	-	S5/16-24X1/4
C4006-0312-2.50	Standard	5/16"	2.50"	1.26"	-	0.87"	-	S5/16-24X1/4
C4016-0312-4.00	Standard	5/16"	4.00"	1.26"	-	0.87"	-	S5/16-24X1/4
C40S6-0375-1.38	Stubby	3/8"	1.38"	1.34"	-	1.00"	-	S3/8-24X5/16
C4006-0375-2.50	Standard	3/8"	2.50"	1.26"	-	1.00"	-	S3/8-24X5/16
C4016-0375-4.00	Standard	3/8"	4.00"	1.26"	-	1.00"	-	S3/8-24X5/16
C4026-0375-5.00	Standard	3/8"	5.00"	1.26"	-	1.00"	-	S3/8-24X5/16
C4046-0375-9.00	Ext. Length	3/8"	9.00"	1.5"	6.12"	1.00"	1.75"	S3/8-24X5/16
C4006-0437-2.50	Standard	7/16"	2.50"	1.50"	-	1.38"	-	S7/16-20X3/8
C4016-0437-4.00	Standard	7/16"	4.00"	1.50"	-	1.38"	-	S7/16-20X3/8
C40S6-0500-1.75	Stubby	1/2"	1.75"	1.50"	-	1.38"	-	S7/16-20X3/8
C4006-0500-2.50	Standard	1/2"	2.50"	1.50"	-	1.38"	-	S7/16-20X3/8
C4016-0500-4.00	Standard	1/2"	4.00"	1.50"	-	1.38"	-	S7/16-20X3/8
C4026-0500-5.00	Standard	1/2"	5.00"	1.50"	-	1.38"	-	S7/16-20X3/8
C4046-0500-9.00	Ext. Length	1/2"	9.00"	1.5"	6.12"	1.38"	1.75"	S7/16-20X3/8
C40S6-0625-1.75	Stubby	5/8"	1.75"	1.61"	-	1.65"	-	S9/16-18X1/2
C4006-0625-3.00	Standard	5/8"	3.00"	1.61"	-	1.65"	-	S9/16-18X1/2
C4016-0625-4.00	Standard	5/8"	4.00"	1.61"	-	1.65"	-	S9/16-18X1/2
C4026-0625-5.50	Standard	5/8"	5.50"	1.61"	-	1.65"	-	S9/16-18X1/2
C4046-0625-9.00	Ext. Length	5/8"	9.00"	1.5"	6.12"	1.65"	1.75"	S9/16-18X1/2
C40S6-0750-1.75	Stubby	3/4"	1.75"	1.77"	-	1.89"	-	S5/8-18X1/2
C4006-0750-3.00	Standard	3/4"	3.00"	1.77"	-	1.75"	-	S5/8-18X1/2
C4016-0750-4.00	Standard	3/4"	4.00"	1.77"	-	1.75"	-	S5/8-18X1/2
C4026-0750-5.50	Standard	3/4"	5.50"	1.77"	-	1.75"	-	S5/8-18X1/2
C4046-0750-9.00	Ext. Length	3/4"	9.00"	-	-	1.75"	-	S5/8-18X1/2

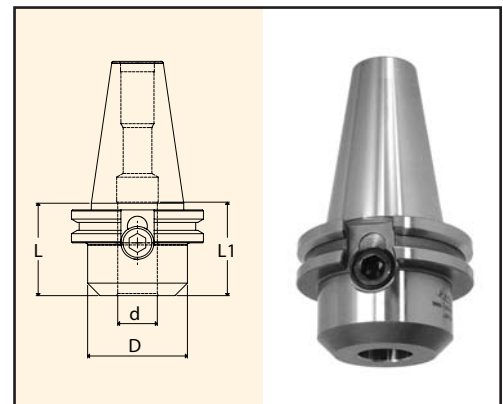

Stubby

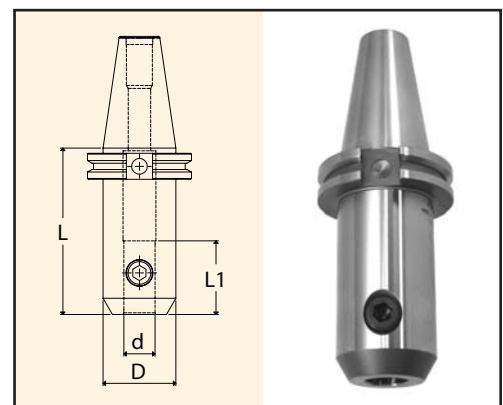

Standard

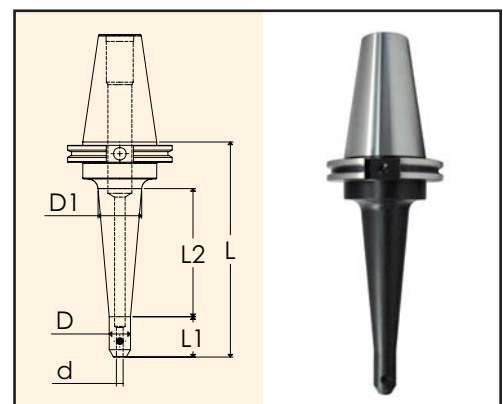

Extended Length

Set Screws are included. Back-up screws not included.
Extended length end mill holders can be modified to DIN standard.

Accessories:



Set Screws
Page 28



Set Screws for Aerospace Holders
Page 28



Tool Jaw
Page 212



Pull Stud
Pages 139-140