


Standard: DIN69893A
 Material: H11 High Alloy Steel
 Hardness: 52 HRC tempered
 Runout: .000040" to .00012" at 3 X Diameter of Tool
 Balancing: <5g.mm at 15,000 RPM (HSK100A)
 Cooling: Center-thru and Face Coolant (HSK100A Standard and Extended only)

Features: All shrink fit holders 6 mm (1/4") and above include a backup screw.
 Application: Compatible with h6 tolerance Steel, HSS, Carbide
 Accessories: **Compatible with Part# RE011 shrink fit reductions and shrink fit extensions (see pages 36-37). Replacement Backup Screw (see page 37). HSK100A Coolant Tube and wrench (not included, see page 37 to order).**



MOLD TYPE

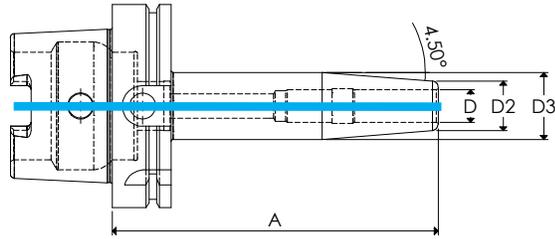

INCH

Part Number	D	A	D2	D3
H100A-SF0250-3.35MT	1/4"	3.35"	0.47"	0.75"
H100A-SF0375-3.54MT	3/8"	3.54"	0.63"	0.91"
H100A-SF0500-3.74MT	1/2"	3.74"	0.71"	1.02"
H100A-SF0625-3.94MT	5/8"	3.94"	0.95"	1.30"

METRIC

Part Number	D	A	D2	D3
H100A-SF6-85MT	6mm	85	12	19
H100A-SF10-90MT	10mm	90	16	23
H100A-SF12-95MT	12mm	95	18	26
H100A-SF16-100MT	16mm	100	24	33

